


# UM 45- 2FLK14/ZFKDS/S7


Order No.: 2965156



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2965156>


VARIOFACE interface module for Siemens SIMATIC® S7-300, for max. 16 channels with SIMATIC®-specific labeling (1 - 20), with spring-cage connection, module width: 98 mm



Commercial data	
GTIN (EAN)	 4 017918 126360
sales group	I631
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 253 (IF-2011)

**Product notes**

WEEE/RoHS-compliant since:  
07/14/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Nominal voltage $U_N$	60 V DC
Max. current carrying capacity per branch	1 A
Max. total current of voltage supply	max. 3 A (/Byte)
Number of positions	14

Width	98 mm
Height	45 mm
Depth	50 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	Field level
Connection method	Spring-cage connection
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14
Stripping length	6 mm
Connection 2	Control system level
Number of connections	2
Connection method	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14

#### Certificates / Approvals




Certification

GOST

## Diagrams/Drawings

### Circuit diagram

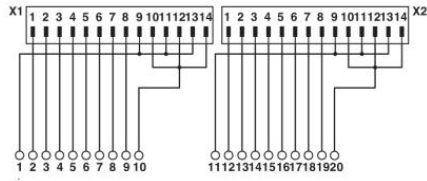

UM 45-2FLK14/ZFKDS/S7 connection scheme

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;