
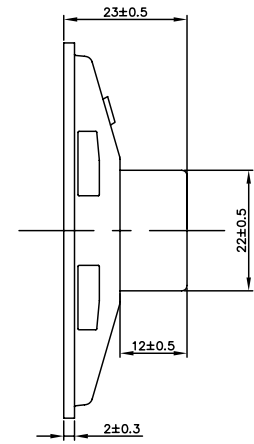


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	2	W
MAX INPUT POWER	5	W
IMPEDANCE	8±15%	OHM
OUTPUT SPL 1W, 0.5M AVERAGE at 0.6, 0.8, 1, 1.2KHz	86±3	dB
DISTORTION	5%	-
RESONANT FREQUENCY	300±70	Hz
FREQUENCY RANGE	100-20000	Hz
HOUSING MATERIAL	METAL	-
CONE MATERIAL	BLACK PAPER AND CLOTH	-
MAGNET MATERIAL	Nd-Fe-B	-
OPERATING TEMPERATURE	-20 ~ +60	°C
WEIGHT	35±5%	grams

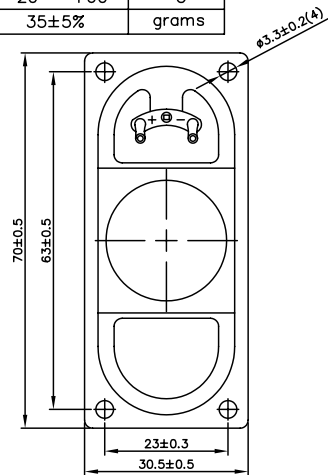

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/03	

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME
AS07008P0.DWG

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS,
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.



projects®
unlimited

Dayton, Ohio

DYNAMIC SPEAKER
AS07008P0

APPROVALS	DATE
DRAWN <i>R.A.C.</i>	9/03
APPROVED <i>R.W.</i>	9/03

SIZE
A

DRAWING NO.
AS07008P0

DO NOT SCALE DRAWING

SCALE: N.T.S.

SHEET 1 OF 1