


Current Batteries

Datasheet	Picture	Size	Voltage (nom.)	ANSI	IEC	Diam. (mm)	Weight (g)	Height (mm)	Length (mm)	Width (mm)
1250		D	1.5	13D	R20	34.2	89	61.5	N/A	N/A

© 2000- 2008 Energizer Energizer, Energizer Bunny design and other marks are trademarks of Energizer.

Eveready 1250


D

SUPER HEAVY DUTY




Industry Standard Dimensions

mm (inches)

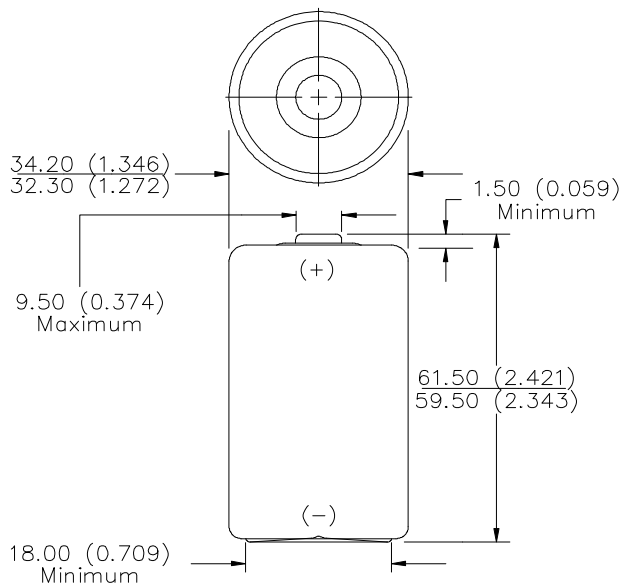


- Chemical System:** Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)
- Designation:** ANSI-13D, IEC-R20
- Battery Voltage:** 1.5 Volts
- Operating Temp:** -18°C to 55°C (0°F to 130°F)
- Average Weight:** 89.0 grams (3.1 oz.)
- Volume:** 53 cubic centimeters (3.2 cubic inch)
- Average Capacity:** 8,000 mAh to 0.8 volts
(Rated at 25 mA continuous at 21°C)
- Cell:** One No. 50 (size "D")
- Jacket:** Metal


TYPICAL PERCENT SERVICE
3.9 ohm - 4 hours/day to 0.75 volts

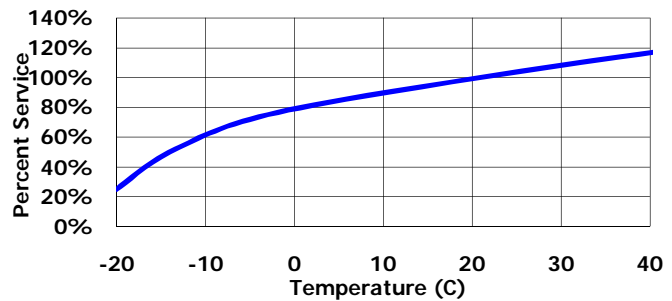

CONSTANT RESISTANCE PERFORMANCE
Typical Service

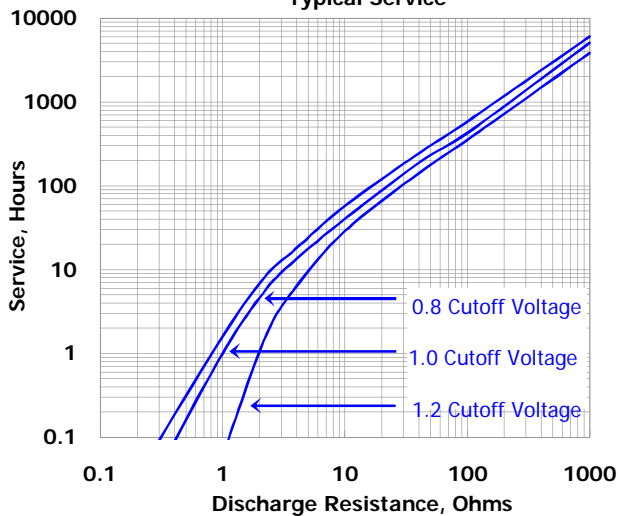

CONSTANT CURRENT DISCHARGE
Typical Service

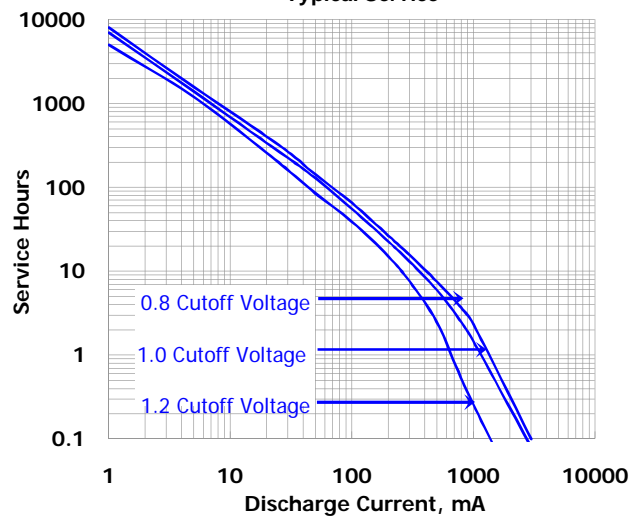

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved