

337

SR416SW
Watch Battery OEM

Technical Data Sheet


Specifications

| | |
|-----------------------|---|
| Chemical system | Zinc / Monovalent Silver Oxide, low drain |
| Nominal Voltage | 1,55 V |
| Capacity | 8 mAh, Discharge over 100 kΩ at 23±3°C to 1,2 V |
| Operating Temperature | 0°C – 60°C |
| Self Discharge | Less than 10% per year at 23±3°C |
| Weight | ~0,12 g |

Dimensions


(according IEC 60086-3)

| | |
|----------|------------------|
| Diameter | 4,80 mm (0,189") |
| Height | 1,65 mm (0,065") |



Discharge Curve

| | |
|----------------|---------|
| Constant Load | 100 kΩ |
| Starting Drain | 15,6 μA |
| Temperature | 23±3°C |

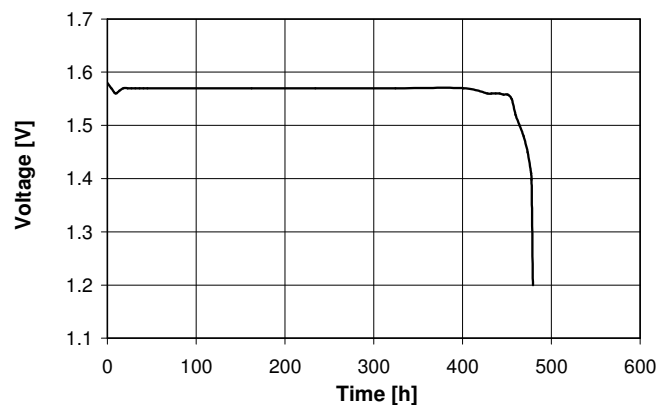

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.

Rev. 337.05 04/07