

MODEL TL-2300


International size reference: D, ER32L615

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




| | |
|--|-----------------|
| ■ Nominal capacity @ 2 mA, to 2V | 16.5 Ah |
| ■ Rated voltage | 3.6 V |
| ■ Maximum recommended continuous current | 250 mA |
| ■ Maximum pulse current capability | 500 mA |
| ■ Weight | 92.5g (3.26 oz) |
| ■ Volume | 51 cc |
| ■ Operating temperature range | -55°C to +85°C |
| ■ U.L. Component Recognition, MH 12193 | |

TADIRAN LITHIUM BATTERIES

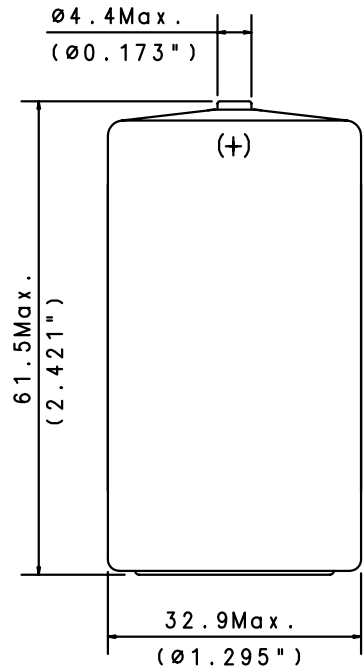

AVAILABLE TERMINATIONS

| | |
|------------------------|---------------|
| SUFFIX- /S STANDARD | 15-5130-21500 |
| SUFFIX- /T SOLDER TABS | 15-5130-31500 |

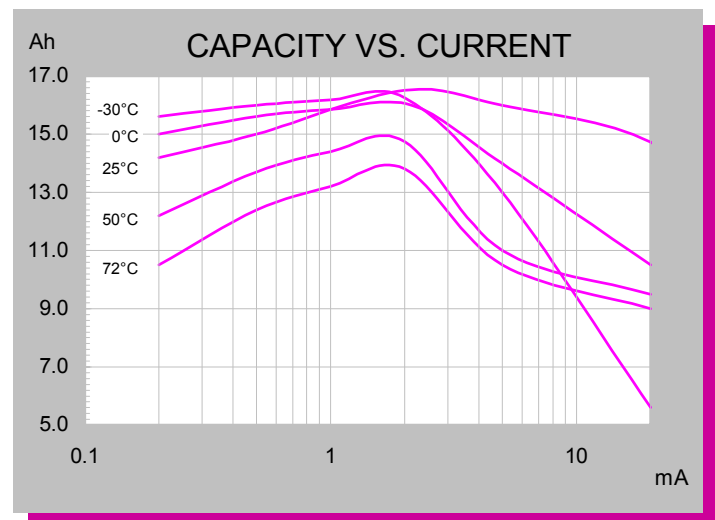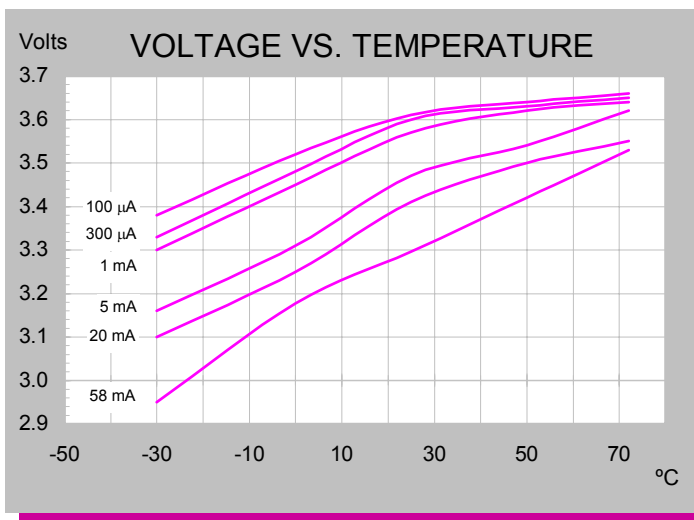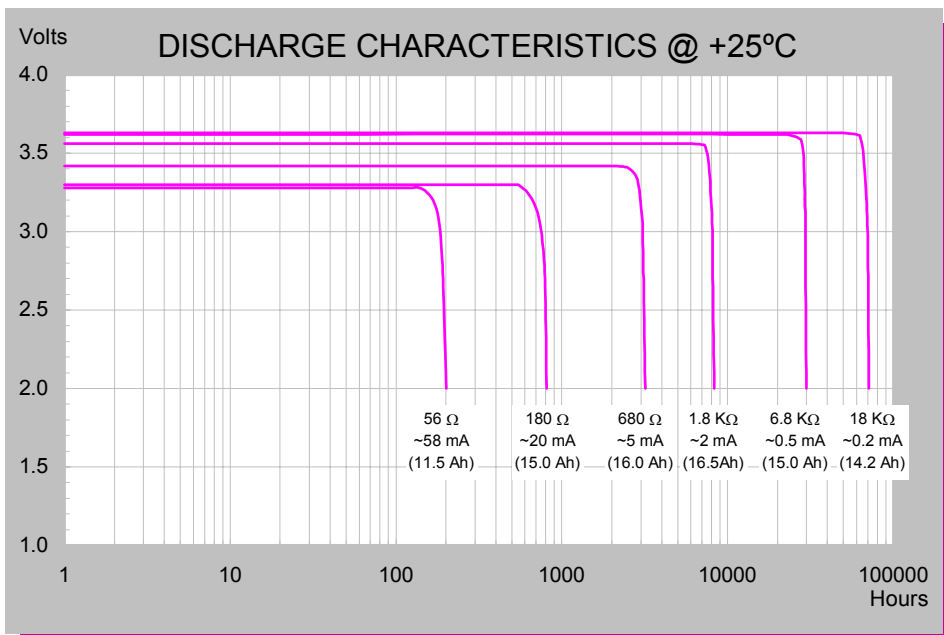

LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. B 05/03