

PLUG MATES Rewireable – For “Hot” connections 120°C



NEW Enhanced designs now available:

- A full 7mm of contact on each side of pins when engaged. Ideal for hi-definition audio signal.

• 4300.0603



- AC outlet plugs with straight or 90° angled cable entry
- For “hot” connections 120°C, Protection Class I

Standard 4300 Series:

- Max. wire size 16 AWG (1.5 mm²)
- Disassemble plug for cable connection
- Material: thermoplastic, UL 94V-2
Contact material: brass

UL	listing	15A/250V	File #E96454
CSA	certification	15A/250V	File #LR38456
VDE	approval	10A/250V	File #73759

- Captive internal contacts for easier and more reliable wiring
- Strain reliefs for either harmonized 1.0 mm², or 14 AWG cable sizes



• 4781.0100
• 4781.0000 **replaces 4300.0603**

• 4784.0100
• 4784.0000 **replaces 4300.0607**



Enhanced 4781/4784 Series:


- Captive internal contacts
- Cable clamp screw mounts inside the plug to secure cable
- Strain reliefs for either harmonized 1.0 mm², or 14 AWG cable sizes
- Disassemble plug for cable connection
- Body material: PA6, UL 94V-0
Contact material: brass

UL	recognition	15A/250V	File #E83589(M)
CSA	certification	15A/250V	File #LR56242-15
VDE	approval	10A/250V	File #100043




Standards: EN60320; IEC 320/C15


4300.0603

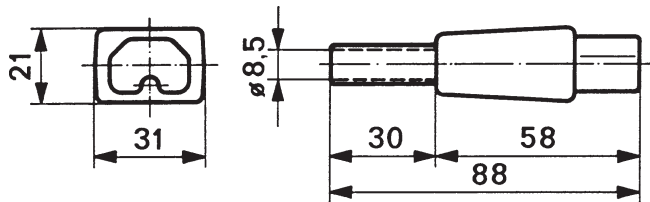

4781 Series, Straight

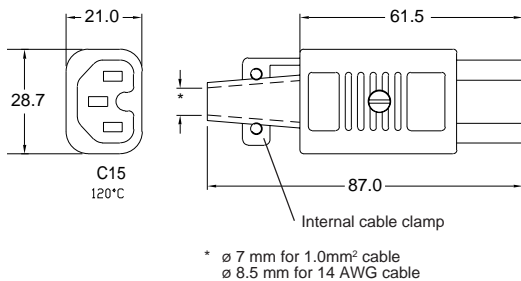

4784 Series, Angled 90°

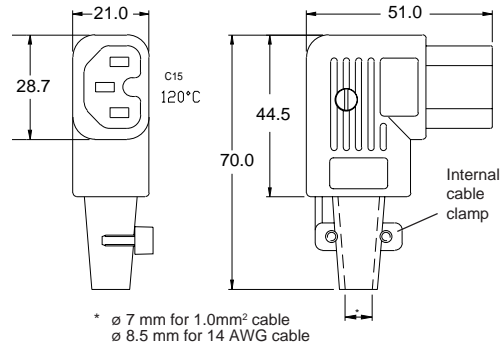

Order Numbers (type)

Outlet plug, 120°C, cable entry straight (in plug axis)	Outlet plug, 120°C, cable entry angled (90° to plug axis)	Max. Cable Size
4300.0603 (8943.W)		16 AWG
4781.0100	4784.0100	14 AWG
4781.0000	4784.0000	1.0 mm ²