Advantages of a Finger-Safe, Ice Cube Socket System

The Complete System Solution!



- Offers a "one stop solution" for your power management system.
- Variety of contact configurations and materials to meet your switching needs.
- Plug-In switching capabilities from 10mA to 20 Amps.
- A variety of Feature Codes and operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.
- Internal Coil Bus Jumper
 System reduces the number
 of wires required for hook-up
 to adjacent sockets.



I.D. Tag/Write-On Plastic LabelUsed for Custom Identification of Circuits.

Isolated Input and Output Terminals

Separates Control Circuits from Load Circuits.

Slim Design

Minimizes Space on DIN Rail.

Mating Hold-Down Clips Available

Secures Relay to Socket.





DIN Rail End Clip


Locking Screw Keeps a Snug DIN Rail System by Eliminating Sliding Sockets.

DIN Rail

35 mm Extruded Aluminum Rail. Designed to Work With Most Sockets. Pre-punched for Quick Installation.






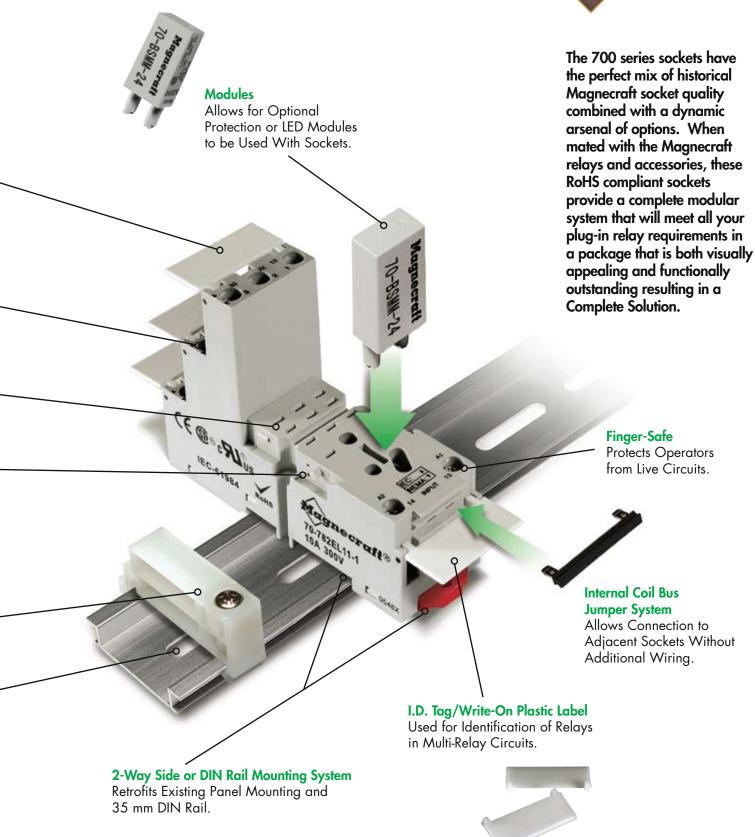

70-782EL14-1 Socket/10 Amp Rating, 300 Volts



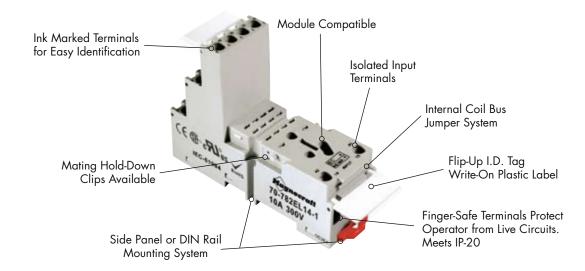









BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

Standard Part Number

Description

70-782EL14-1

14-Pin Ice Cube, Logic Style, DIN Panel Mount with Elevator Terminals, Module Compatible.

General Specifications (UL 508)

| General Specifications (UL 50 | • | | |
|-------------------------------------|------------|----------------------------|--|
| Characteristics | Units | Value | |
| Number of Terminals | | 14 | |
| et at the | | | |
| Electrical Rating | V/ h | 200 | |
| Nominal Voltage Rating | Volts | 300 | |
| Nominal Current Rating | Amps | 10 | |
| Dielectric Strength | | | |
| Output to Adjacent Output Terminals | V rms | 3000 | |
| Output to Input Terminals | V rms | 3000 | |
| Terminals to Rail / Chassis | V rms | 3000 | |
| Temperature | | | |
| Operating Range: | °C | - 40 to + 80 | |
| Storage Range: | °C | - 40 to + 105 | |
| elerage kange. | | 40 10 1 100 | |
| Construction | | 15.00 | |
| Protection Category (Finger-Safe) | EN 60529 | IP 20 | |
| Internal Metal Tracks | | Copper Alloy, Zinc Plated | |
| Screw Terminals | | Steel, Zinc Plated | |
| Screw Style | | Combination Head, | |
| Screw size | mm | M3 | |
| Screw Torque 3.5 mm (Maximum) | Lb-in / Nm | 7 / 0.8 | |
| Miscellaneous | | | |
| Socket Mounting: | | Din / Panel | |
| Wire Size Capacity (Maximum) | EN 60204-1 | AWG mm2 | |
| Soild Cu | AWG, mm2 | 16 / 18 (2) 1.5 /0.75 (2) | |
| Stranded Cu | AWG, mm2 | 16 / 18 (2) 1.5 / 0.75 (2) | |
| Wire Connection Method | | Elevator | |
| DIN Rail Mounting | EN 60715 | 35mm | |
| Chassis Mount Screw Torque | Lb-in / Nm | 7 / 0.8 | |
| Flamability Rating | Class | 94V-0 | |
| Body Color | | Light Gray | |
| DIN Locking Method | | Red Plastic Locking Clip | |
| Product Certification | | UL, CSA | |
| Conformance | | CE, RoHS | |
| Weight | grams | 62 | |

Optional Mating Accessories





