



Audio

**NEUTRIK**

 Deutsche  
Version

[Home](#)  
[About Us](#)  
[Products](#)  
[Support](#)  
[News](#)  
[Sitemap](#)

[Search](#)

[Products only](#)

© Neutrik® AG  
All rights reserved  
[Legal Notices](#)



Audio

## NYS 3.5 mm Plugs


[back](#)

[Print](#)

### NYS226



3.5 mm plug, 2-pole, metal handle with crimp strain relief

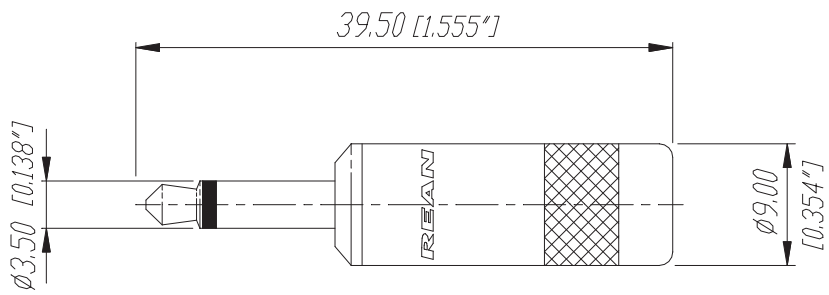

					Werkstoff:	Maßstab:		Datum	Name
				*Lieferant darf ohne Ruecksprache nicht geaendert werden		1:1	Gezeichnet	04.04.02	Batlogg
				Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)			Geprueft		
				Benennung:	3,5 mm Mono Plugs NYS 226		Ersetzt durch:	Blatt	
							Ersatz fuer:	von Blatt	
					REAN		Zeichn. Nr.	3102 ST 22 66	
Ind.	Aenderung	Datum	Name						



## NYS 3.5 mm Plugs



### NYS226

There are no technical infos for this product.

Product	
Electrical	
Contact resistance	< 10 mΩ
Dielectric strength	0,5 kVdc
Rated current per contact	depends on mated connector A
Mechanical	
Cable O.D.	≤ 4 mm
Material	
Contact plating	2 μm Ni
Contacts	CuZn39Pb3
Insert	PA 66 30 % GR
Shell	CuZn39Pb3 gal 2 ?m Ni plated
Environmental	
Solderability	Complies with IEC 68-2-20
Temperature range	-20 °C to +70 °C
Optical	
Mobile Cables	