



Audio

**NEUTRIK**

 Deutsche Version

- Home
- About Us
- Products
- Support
- News
- Sitemap

Search

Products only

© Neutrik® AG  
All rights reserved  
Legal Notices



Audio

## NYS 3.5 mm Plugs


[back](#)

[Print](#)

### NYS231G



3.5 mm plug, 3-pole, metal handle, gold plated contacts

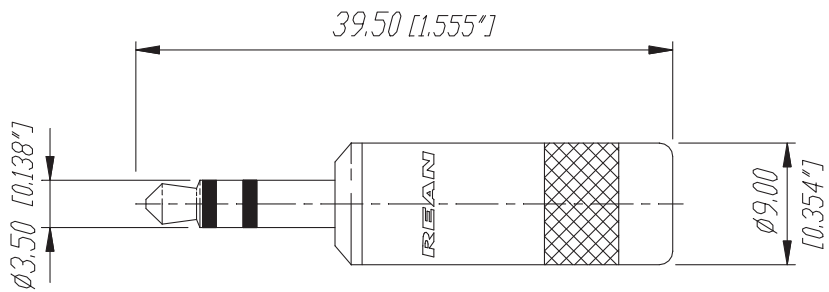

|      |           |       |      |  |                                |          |                |               |         |
|------|-----------|-------|------|--|--------------------------------|----------|----------------|---------------|---------|
|      |           |       |      |  | Werkstoff:                     | Maßstab: |                | Datum         | Name    |
|      |           |       |      | *Lieferant darf ohne<br>Ruecksprache nicht<br>geaendert werden |                                | 2:1      | Gezeichnet     | 04.04.02      | Batlogg |
|      |           |       |      | Zeichnung urheberrechtlich<br>geschuetzt (DIN 34) (C)          |                                |          | Geprueft       |               |         |
|      |           |       |      | Benennung:   | 3.5 mm Stereo Plug<br>NYS 231G |          | Ersetzt durch: | Blatt         |         |
|      |           |       |      |  | REAN                           |          | Ersatz fuer:   | von Blatt     |         |
| Ind. | Aenderung | Datum | Name |  |                                |          | Zeichn. Nr.    | 3102 ST 22 70 |         |



## NYS 3.5 mm Plugs



### NYS231G

There are no technical infos for this product.

| Product                   |                              |
|---------------------------|------------------------------|
| Electrical                |                              |
| Contact resistance        | < 10 mΩ                      |
| Dielectric strength       | 0,5 kVdc                     |
| Rated current per contact | depends on mated connector A |
| Mechanical                |                              |
| Cable O.D.                | ≤ 4 mm                       |
| Material                  |                              |
| Contact plating           | 0.2 μm Au                    |
| Contacts                  | CuZn39Pb3                    |
| Insert                    | PA 66 30 % GR                |
| Shell                     | CuZn39Pb3 gal 2 μm Ni plated |
| Environmental             |                              |
| Solderability             | Complies with IEC 68-2-20    |
| Temperature range         | -20 °C to +70 °C             |
| Optical                   |                              |
| Mobile Cables             |                              |