



Current refinements (click  to remove)

[Search Tips](#) 
 [Region](#)  [USA](#)
 [Product Family](#)  [Ring Terminal, Large Wire Non-Insulated](#)
 [Text Search: 'P8-14R-Q'](#)
**Your search criteria matched only one product, shown below.**


- Designed for use with #8 - #2 AWG copper wire
- Ring tongue design assures a secure connection in high vibration applications
- Internal barrel serrations assure good wire contact and maximum tensile strength
- Brazed seam protects terminal barrel from splitting during the crimp process
- Barrel of terminal internally beveled to provide quick and easy wire insertion
- Maximum recommended operating temperature 302°F (150°C)

‡UL and CSA approved tooling/product combinations.

Part Number:	P8-14R-Q
RoHS Compliancy Status:	Compliant
Part Description:	Ring terminal, large wire, 8 AWG, 1/4" stud size, non-insulated.
Product Type:	Terminals
CSA Certified:	Yes
UL Listed:	Yes
Length (In.):	1.14
Width (In.):	.47
Angle:	straight
Clearance:	.43
Stock:	.04
Stud Size:	1/4"
Tool:	CT-1701‡
Wire Range:	8 AWG
Wire Range (mm <sup>2</sup> ):	10
Min. Order UOM:	PC
Min. Order Qty.:	25


BOM Qty. (# of Pkgs.)

[Add to My Catalog](#)

 Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'My Catalog' features.

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER		STUD SIZE	DIMENSIONS in.				
PREFIX	PK		A $\pm .03$	W $\pm .01$	C $\pm .02$	M $\pm .03$	H $\pm .01$
*PB-8RN	-Q -T	#8	1.09 (27.69)	.36 (9.14)	.43 (10.92)	.91 (23.11)	.17 (4.32)
PB-8R	-Q -T	#8	1.12 (28.45)	.42 (10.67)	.43 (10.92)	.91 (23.11)	.17 (4.32)
PB-10R	-Q -T	#10	1.14 (28.96)	.47 (11.94)	.43 (10.92)	.91 (23.11)	.20 (5.08)
PB-14R	-Q -T	1/4"	1.14 (28.96)	.47 (11.94)	.43 (10.92)	.91 (23.11)	.27 (6.86)
PB-56R	-Q -T	5/16"	1.25 (31.75)	.59 (14.99)	.51 (12.95)	.95 (24.13)	.33 (8.38)
PB-38R	-Q -T	3/8"	1.25 (31.75)	.59 (14.99)	.51 (12.95)	.95 (24.13)	.39 (9.91)
PB-12R	-Q -T	1/2"	1.36 (34.54)	.82 (20.83)	.54 (13.72)	.95 (24.13)	.52 (13.21)

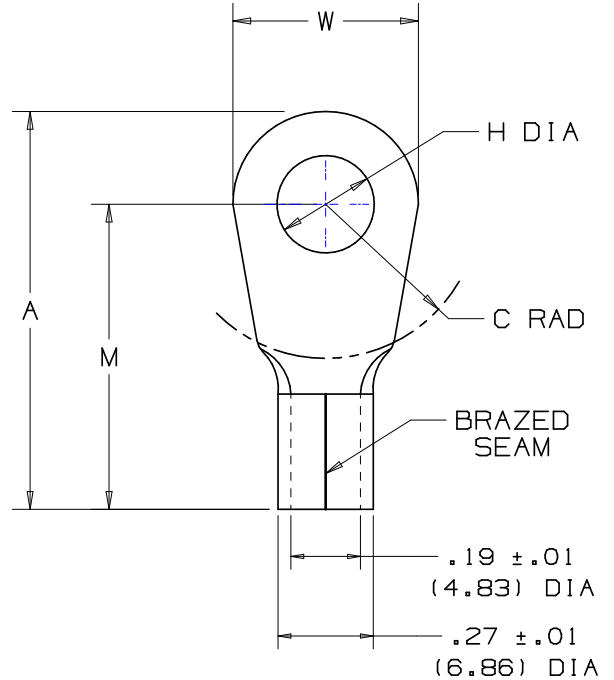

NOTES:

- UL LISTED FOR: (EXC. PB-8RN)  
A. 303° F (150° C) MAX OPERATING TEMP  
B. #8 AWG STRANDED COPPER WIRE
- PACKAGE QTY: STD. PKG. -Q=25  
BULK PKG. -T=200
- MATERIAL:  
A. STAMPING - .040" (1.02) THK COPPER,  
TIN PLATED
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOL: CT-700
- WIRE STRIP LENGTH: 3/8 <sup>+1/32</sup><sub>-0</sub> (9.5 <sup>+8</sup><sub>-0</sub>)

\*PB-8RN IS NOT UL LISTED OR CSA CERTIFIED



LISTED  
587H  
E52164



CERTIFIED  
LR31212

																		A41215_05	
05	7/06	DAW	DAW	ADDED PB-8RN		TR00153													 TINLEY PARK, ILLINOIS #8 BARREL NON-INSULATED RING TONGUE .280 (7.11) MAX. WIRE INSUL. DIAMETER
04	1/01	KMD	SKB	CAD FILE SPEC. WAS N41215AA_PCD_02		08938	JAC	CCH											
03	5/95	MS		UPDATED NOTES AND DIMENSIONS		03320													
02	7-88	DW		REDRAWN WITH REVISIONS															
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.								
								DAW		NONE	A41215								