


Model 6232A Modular Test Probe with Standard 0.080 (2mm) Tip

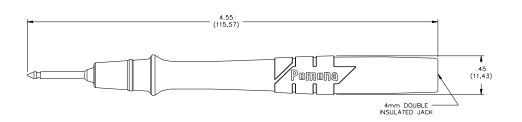

FEATURES:

- Modular designed for use with Pomona CE test lead sets, or any other modular test leads with a CE safety style sheathed banana jack.
- Notched .080" (2mm) probe tip; notch near probe tip end helps keep probe from sliding off test points.
- Probe tip mates with 0.080 (2mm) pin tip jacks.

MATERIALS:

Probe Body: Black or Red Polypropylene

	•	
Tip:		Nickel plated brass, notched .080" (2mm) tip
Jack:		Nickel plated brass, .166 (4mm) safety style sheathed banana jack

RATINGS:

IEC 1010-2-031, Category III Operating Voltage: 1000 Vrms/DC Current: 10 Amperes

ORDERING INFORMATION:

Model# 6232A (Set includes one black and one red probe)

Probes can be used with the following Pomona CE test lead sets:

5907A * Straight banana plug to right-angle banana plug test lead set; length 48" (122.0cm)

5908A * Straight banana plug to straight banana plug test lead set; length 48" (122.0cm)

5909A * Right-angle banana plug to right-angle banana plug test lead set; length , 48" (122.0cm)

6358 * Straight banana plug to Retractable sheath banana plug test lead set; length 48" (122.0cm) * See data sheets for specifications

All dimensions are in inches. Tolerances (except noted): $xx = \pm .02^{\circ}$ (,51 mm), $xxx = \pm .005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com