

Linear	Desktop
Enclosed or L Bracket	Open Frame
PCB Mount	Rack Mount Hot Swap

AC-DC Selector

Applications	# of Outputs	Output Power (W)											
		5	10	15	30	50	100	300	500	1000	1500	2500	
High Reliability Industrial (Five Year Warranty)	Single				NNS								
					HWS								
							JWS						
									LZSA				
	Dual			NND									
	Triple					JWT							
Industrial (Three Year Warranty)	Single & Multiple		HK-A (Single Output, 115VAC input)										
							NV						
				MTW						Vega			
										Alpha			
					LS								
Datacom Commercial (One - Two Year Warranty)	Single		KW, KPS, KM										
			ZWS, ZWSAF, ZWSPAF										
				DT									
				H									
				SC, SC120, ZP					SWS				
								PFE					
									FPS (1U)				
									TH (1U)				
		Multiple		KW, KM									
				LWD, LWT									
			H										
			DT										
			SC, ZP										
						ZWD, ZWQ							
Programmable	Single							ZUP					
DIN Rail Mount	Single				DSP, DPP, DLP-PU*								
							DLP						

* See website



300 to 1008W AC-DC Power Module

- ◆ Low profile, small size
- ◆ 100°C baseplate temperature
- ◆ High power density
- ◆ High Efficiency
- ◆ Suitable for conduction cooling



Features and Benefits

Feature	Benefit
◆ Low profile	◆ Assists system integration
◆ High Efficiency	◆ Easier to cool
◆ Power Factor Corrected (PFC)	◆ Supports Global Use
◆ Operation up to 100°C baseplate	◆ Operates in harsh environments

Specifications

MODEL		PFE300S PFE500S	PFE700S	PFE500F	PFE1000F <i>Preliminary</i>
ITEMS					
AC Input	VAC	85 to 265VAC, 47-63Hz (PFE-S Operation to 440Hz possible(3))			
Input Current (100 / 220VAC)	A	4.0 / 2.0	8.8 / 4.4	6.8 / 3.4	13.6 / 6.6
Model dependant		6.2 / 3.2			
Inrush Current (100 /200VAC) (1)	A	20 / 40 peak			
Power Factor		0.95 minimum, meets EN61000-3-2			
Output Voltage Setpoint Accuracy	-	±2%	±1V	±2%	±2%
Ripple and Noise (1)	-	1%	4V	1%	1%
Over Current Protection	%	105 - 140% (Automatic Recovery)			
Over Voltage Protection	-	125 - 145%	60 - 69.6V	125 - 145%	105 - 140% Manual reset 125 - 145%
Series Operation	-	Yes			
Parallel Operation	-	No	Yes (Droop mode)	Yes (Single wire)	Yes (Single wire)
Power On Signal (ENA)	-	Open collector (10mA sink current). Low (on) when output is present			
Auxilliary Supply	-	None	None	10 - 14V, 20mA	10 - 14V, 20mA
Remote On/Off (Opto isolated)	-	None	None	High = On	High = On
Overtemperature Protection		Yes			
Operating Baseplate Temp.	°C	-40 to +100°C (2)			
Storage Temperature	°C	-40 to +100°C			
Humidity (non condensing)		Operating: 20 - 95%RH, Non Operating: 10 - 95%RH			
Cooling		Conduction			
Withstand Voltage (1 min) (4)		Input to Output 3kVAC, Input to Baseplate 2.5kVAC, Output to Baseplate 1.5kVDC			
Isolation Resistance		Output to baseplate: 100M Ohm at 500VDC, 25°C ambient, 70%RH			
Vibration (non operating)		10-55Hz (1 min sweep), constant amplitude 0.825mm (max 49m/s ²), X, Y, Z 1 hour each			
Shock		196.1m/s ²			
Safety Certifications		UL60950-1, CSA60950-1 (cUL), EN60950-1, CE mark (LVD)			
Weight	g	250	250	300	500
Size (WxHxL)	mm	61 x 12.7 x 116.8mm		70 x 12.7 x 122mm	100 x 13.4 x 160mm
	in	2.4 x 0.5 x 4.6"		2.76 x 0.5 x 4.8"	3.94 x 0.53 x 6.3"
Warranty	yrs	2 years			

Notes: (Consult Installation Manual for detailed specifications, test methods and application notes)

- 1) External components are required, consult Application Notes
- 2) PFE500-12, PFE500F-12: -40 to 85°C. See instruction manuals for derating curves
PFE1000F28 & PFE1000F48: -40 to 85°C below 170VAC input voltage.
See instruction manuals for derating curves

- 3) Requires the use of an undervoltage relay or similar. See website Q&A for details
- 4) PFE500F, PFE1000F: 500VDC Output to baseplate


Model Selector

Model	Output Voltage (V)	Adjust. Range (V)	Maximum Current (A)	Maximum Wattage (W)	Load Reg. (mV)	Line Reg. (mV)	Efficiency typ (5)
PFE300S-12	12	9.6 - 14.4	25	300	48	48	81 / 83
PFE500S-12	12	9.6 - 14.4	33	396	48	48	82 / 83
PFE500F-12	12	9.6 - 14.4	42	504	48	48	81 / 83
PFE1000F-12	12	9.6 - 14.4	60	720	48	48	80 / 82
PFE300S-28	28	22.4 - 33.6	10.8	302	56	56	83 / 85
PFE500S-28	28	22.4 - 33.6	18	504	56	56	84 / 86
PFE500F-28	28	22.4 - 33.6	18	504	56	56	84 / 86
PFE1000F-28	28	22.4 - 33.6	36	1008	56	56	84 / 86
PFE300S-48	48	38.4 - 57.6	6.3	302	96	96	84 / 86
PFE500S-48	48	38.4 - 57.6	10.5	504	96	96	84 / 86
PFE500F-48	48	38.4 - 57.6	10.5	504	96	96	84 / 86
PFE1000F-48	48	38.4 - 57.6	21	1008	96	96	84 / 86
PFE700S-48	51	None	14	714	50 - 57V (6)		86 / 89


(5) 100 / 200VAC
 (6) Total regulation range

Items in green are preliminary


PFE500S & PFE700S Outline Drawing

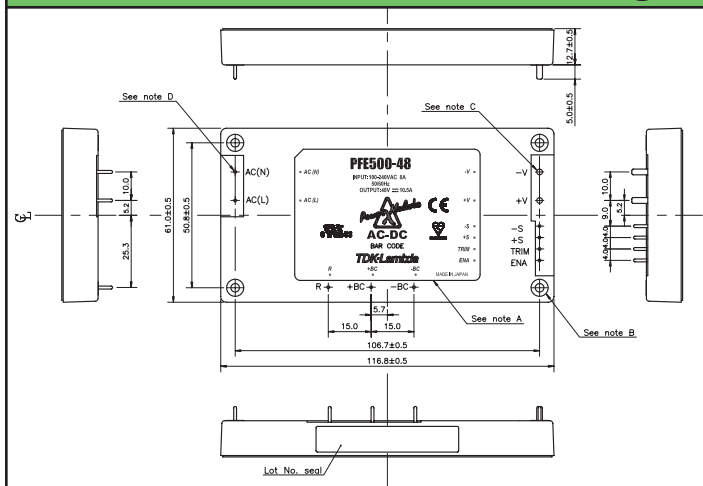

PFE500F Outline Drawing

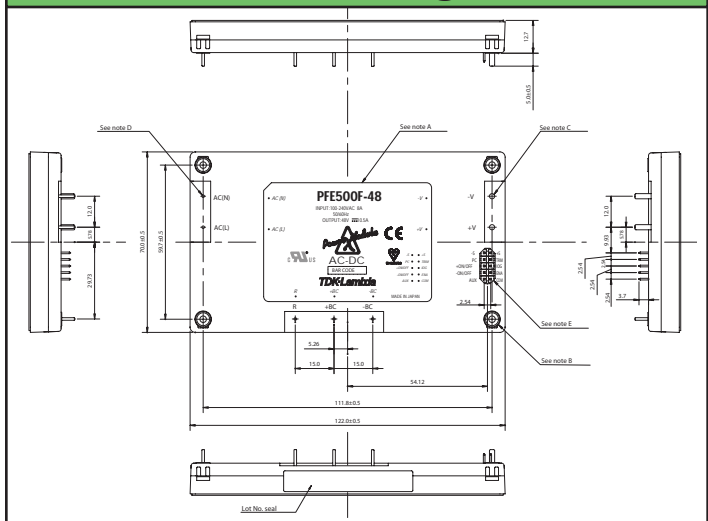

PFE500S Basic connection

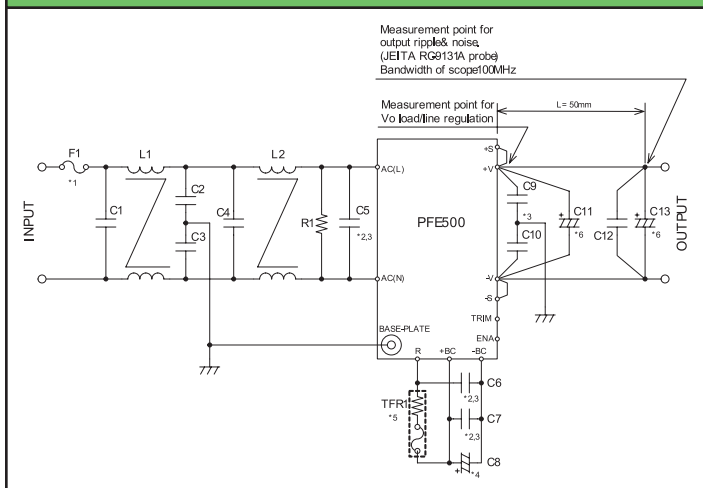

Heatsink Table (PFE-S Models only)

Heatsink	Size (mm)	Thermal Resistance
HAF-10L	116.8 x 25.4 x 61	2.2°C/W
HAF-15L	116.8 x 38.1 x 61	1.9°C/W
HAF-15T	116.8 x 38.1 x 61	1.5°C/W

Options

Suffix	Description
Blank	M3 tapped mounting inserts (4)
/T	3.3mm non-threaded inserts (4)

Other Lambda Products

PAE, PAH, PAF	50 to 600W DC-DC converters
CC-E, PX	1.5 to 40W DC-DC converters