


Current Batteries

Datasheet	Picture	Size	Voltage (nom.)	ANSI	IEC	Diam. (mm)	Weight (g)	Height (mm)	Length (mm)	Width (mm)
528		Lantern	6	915A	4R25Y	N/A	885	112	68.2	68.2


© 2000- 2008 Energizer Energizer, Energizer Bunny design and other marks are trademarks of Energizer.

ENERGIZER 528

6V



Industry Standard Dimensions

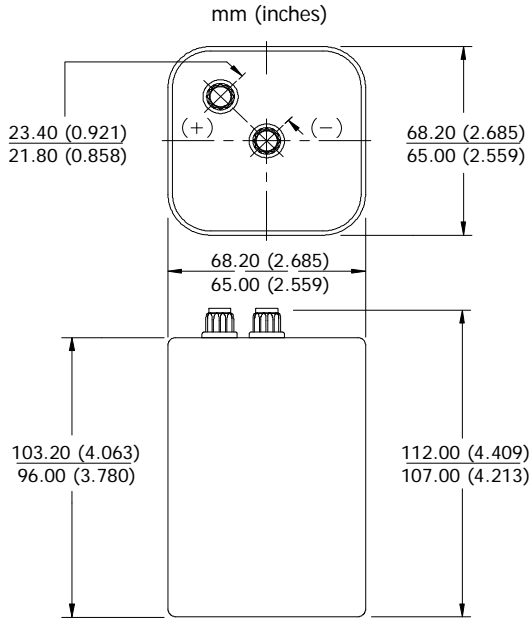


This battery shall pass freely through a cylindrical tube 82.6 (3.250) diameter

Specifications



Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-908A, IEC-4R25Y
Nominal Voltage:	6.0 volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	885 grams (31.3 oz.)
Typical Volume:	440.4 cubic centimeters (26.9 cubic inch)
Jacket:	Metal
Cells:	Four 3-361 in series
Terminal:	Screw Post

Milliamp-Hours Capacity

Continuous discharge to 3.2 volts at 21°C

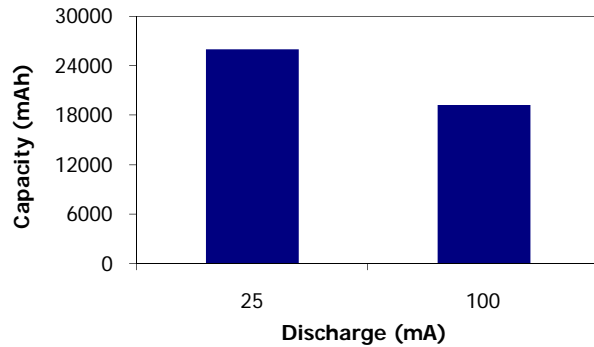

Industry Standard Tests (21°C)

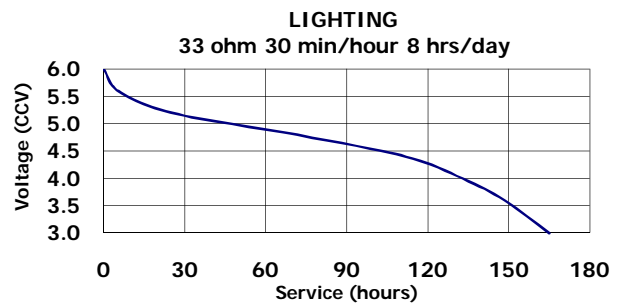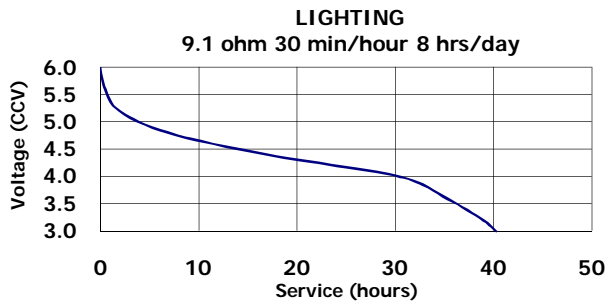

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.