

PRODUCT SPECIFICATION 02-06

1.0 SCOPE

This specification covers the .062 diameter pin and socket terminal product line with their associated connector housings designed for use on copper wire.

2.0 PRODUCT DESCRIPTION

The product line described in general terms is found in catalog M200. The connector is made in 1, 2, 3, 4, 5, 6, 8, 9, 12, 15, 24 and 36 circuit sizes. Connector plugs and receptacles are nylon and provided with optional mounting ears for snap-in panel mounting. The housing accepts wire ranges 30 thru 18 AWG and insulation diameters of .040 thru .120 inches.

3.0 RECOGNIZED AGENCY APPROVALS

- 3.1 Underwriters' Laboratories: E29179
- 3.2 Canadian Standards Association: 19980

5	D
4	E
3	D
2	D
1	E
13	SHT. REV.

.062 MINIATURE PIN TERMINALS		DATE	4/27/71
MOLEX-PRODUCTS CO.		Page 1 of 5	
DOWNERS GROVE, ILL. 60515, U.S.A.		PS -02-06	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO THE MOLEX PRODUCTS COMPANY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			
UNLESS OTHERWISE SPECIFIED	SCALE	DRWS BY	CHK'D BY
3-PLACE DEC. DIMS ± .005	2	WH	4M
2-PLACE DEC. DIMS ± .010			
FRACTIONAL DIMS ± 1/64			
ANGULAR ± 1/2°			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS. UNLESS OTHERWISE SPECIFIED.			
DO NOT SCALE DRAWING			
REVISIONS			
A REVISOR NO. 938X 7-6-72 BFM			
B RELEASE NO. 1194X 8-17-72 <del>WH/EJC</del>			
C RELEASE NO. 1194X 8-17-72 <del>WH/EJC</del>			
FILMED MICROFILMED			
D REVISION 'X' 4-29-66 JCS			
4-29-66 JCS			
THERMOCOR # 9018			
TAS SECTION 4.5.2			
INSULATION 770			
NOMINATED TERM.			
NOM V. BOX - SHT. 4			
ADDRESS SHT. 1			




### 4.0 MECHANICAL SPECIFICATIONS

#### 4.1 Materials, Dimensions

##### 4.1.1 Standard .062" molded nylon connectors .145 inch center to center spacings

Circuits (a)	1		2		3		4		4		5		6		8		9		12		15(b)		24		36(c)	
RECEPTACLE	1625-1		1625-2		1625-3		1625-4		2004		1625-5		1625-6		1649		1625-9		1625-12		1625-15		1625-24		1772	
	R	P	R	P	R	P	R	P	R	P	R	P	R	P	R	P	R	P	R	P	R	P	R	P	R	P
A	N/A	N/A	.265	.318	.265	.318	.260	.312	.400	.465	.265	.318	.505	.607	.330	N/A	.552	.615	.563	.614	.563	.614	.715	.765	.707	.825
B	N/A	N/A	.505	.609	.650	.754	.785	.865	.506	.615	.940	1.044	.552	.615	1.715	N/A	.650	.752	.795	.903	.934	1.042	1.079	1.182	1.677	1.795
C	N/A	N/A	N/A	.295	N/A	.295	.207	.292	N/A	.537	N/A	.305	N/A	.600	.310	.268	.530	.530	.530	.530	.527	.550	.665	.693	.855	.802
D	.781	.750	.781	.750	.781	.750	.781	.750	.750	.750	.781	.750	.781	.750	.781	.750	.781	.750	.781	.750	.781	.750	.750	.750	.781	.750
E	.192 Dia.	N/A	.192	.295	.192	.295	.192	.297	.339	.537	.192	.305	.494	.600	.220	.308	.494	.592	.489	.592	.487	.590	.634	.742	.689	.802
F	N/A	.298 Dia.	.340	.443	.485	.588	.630	.734	.339	.537	.775	.888	.344	.450	1.505	1.595	.489	.587	.634	.737	.770	.876	.918	1.027	1.508	1.618
G	N/A	N/A	.395	.375	.395	.375	.395	.375	.370	.350	.395	.375	.395	.395	.395	.375	.395	.375	.395	.375	.395	.375	.370	.350	.395	.375
H	N/A	N/A	.188	.188	.188	.188	.188	.188	.250	.250	.188	.188	.375	.375	.310	N/A	.375	.375	.375	.375	.375	.375	.500	.500	.625	.625
I	N/A	.200 Dia.	N/A	.348	N/A	.488	N/A	.635	N/A	.340	N/A	.780	N/A	.345	N/A	1.505	N/A	.490	N/A	.635	N/A	.774	N/A	.928	N/A	N/A
J	N/A	N/A	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21	.21

Available with strain relief 1864; Collar dia. .415" — Part 15-04-0202; .500" — Part 15-04-0203. Dimensions C to J are included for reference only. Dimensions subject to nominal variations. N/A — Not available or not applicable.

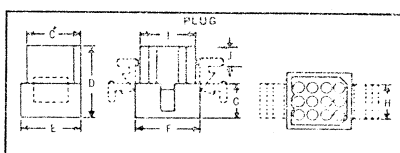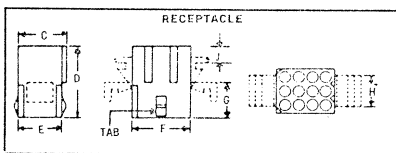

##### 4.1.2 Terminals: Refer to sales drawing 02-06-\* (SD-1560 Series)

SEE D SH 1 FILMED MICROFILMED 8-17-72 REVISIONS	UNLESS OTHERWISE SPECIFIED TOLERANCES: 3-PLACE DEC. DIMS ± .005 2-PLACE DEC. DIMS ± .010 FRACTIONAL DIMS ± 1/64 ANGULAR ± 1/2°	.062 MINIATURE PIN TERMINALS MOLEX-PRODUCTS CO. DATE 4/27/71	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS. UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWING	DOWNS G. 11/71 SCALE THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO THE MOLEX PRODUCTS COMPANY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	DOWNS GROVE, ILL. 60515, U.S.A. PS -02-06 Page 2 of 5

- 4.2 Temperature Rise: Maximum Temperature rise is 30°C for all connector assemblies when used at their maximum rated current (Underwriters' Laboratories requirement).
- 4.3 Ambient temperature range: -40°C to 105°C
- 4.4 Humidity:
  - 4.4.1 Test method - exposure shall be 96 hours with a 95% to 100 % relative humidity and a temperature of 100° ± 5% F. A one ampere current shall be placed through a male/female assembly within one hour after removing from the Humidity Chamber (18 AWG stranded wire).
  - 4.4.2 Requirement - the maximum MV drop across both terminals shall be 15 MV. The probe should be placed on the wire approximately 1" from the crimp barrel.
- 4.5 Engage/Disengage forces for standard terminal (.008 stock 70/30 brass):
  - 4.5.1 Plug and Receptacle Connector

No. of Cycles	AVG. SINGLE CIRCUIT FORCES:	
	Engage	Disengage
1st	2.0 lbs.	1.8 lbs.
10th	1.3 lbs.	1.0 lbs.

D SEE SHEET 1	FILMED MICROFILMED D 8/10/73	C 8-17-72 REVISIONS	UNLESS OTHERWISE SPECIFIED TOLERANCES: 3-PLACE DEC. DIMS ± .005 2-PLACE DEC. DIMS ± .010 FRACTIONAL DIMS ± 1/64 ANGULAR ± 1/2°	DRAWN BY CHK'D BY SCALE	.062 MINIATURE PIN TERMINALS	DATE 4/27/71
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS. UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWING	MOLLEX DOWNERS GROVE, ILL. 60515, U.S.A.	PS -02-06 Page 2 of 5	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO THE MOLEX PRODUCTS COMPANY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						

4.5.2 Terminal Insertion and Retention in Connector Housing  
 Male and Female  
 INSERTION 2.5 lbs.  
 RETENTION 20 lbs. min. using 18 AWG (by wire pull test method)

4.6 Terminal crimp strength - minimum pull out force in pounds is given in the following table for various wire sizes (AWG)

WIRE GAGE	18	20	22	24	26	28	30
PULL OUT FORCE (LBS.)	20	15	10	8	5	3	2

5.0 ELECTRICAL SPECIFICATIONS

5.1 Rated Voltage, currents

Circuits (a)	1	2	3	4	4	5	6	8	9	12	15(b)	24	36(c)
RECEPTACLE	1625-1	1625-2	1625-3	1625-4	2004	1625-5	1625-6	1649	1625-9	1625-12	1625-15	1625-24	1772
Max. Amp.	5	5	5	5	5	5	5	5	5	5	5	4	4
Max. Volts	250	250	250	250	250	250	250	250	250	250	250	250	250
Holding Tabs Only	03-06-1011	03-06-1023	03-06-1032	03-06-1042	03-06-1044	03-06-1056	03-06-1062	N/A	03-06-1092	03-06-1122	03-06-1152	03-06-1242	03-06-1362
With EARS AND TABS	N/A	03-06-1022	03-06-1031	03-06-1041	03-06-1043	03-06-1055	03-06-1061	03-06-1081	03-06-1091	03-06-1121	03-06-1151	03-06-1241	03-06-1361

212

PLUG

Max. Amp	5	5	5	5	5	5	5	5	5	5	5	4	4
Max. Volts	250	250	250	250	250	250	250	250	250	250	250	250	250
With Mounting Ears Only	N/A	03-06-2022	03-06-2031	03-06-2041	03-06-2043	03-06-2054	03-05-2062	N/A	03-06-2091	03-06-2121	03-06-2151	03-06-2241	03-06-2361
Without Mounting Ears	03-06-2011	03-06-2023	03-06-2032	03-06-2042	03-06-2044	03-06-2055	03-06-2061	03-06-2081	03-06-2092	03-06-2122	03-06-2152	03-06-2242	03-06-2362

E SEE SHEET 1 D SEE SHEET 1 FILMED MICROFILMED 8-17-72 REVISIONS C	UNLESS OTHERWISE SPECIFIED TOLERANCES: 3-PLACE DEC. DIMS ± .005 2-PLACE DEC. DIMS ± .010 FRACTIONAL DIMS ± 1/64 ANGULAR ± 1/2°	DRAWING BY: LK SCALE: DATE: 4-27-71 Molex DOWNERS GROVE, ILL. 60515, U.S.A. THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO THE MOLEX PRODUCTS COMPANY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.
	.062 MINIATURE PIN TERMINALS	
	MOLEX PRODUCTS CO.	
	Page 4 PS -02-06	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS, UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWING		

5.2 Terminal resistance (voltage drop measured at one amp) (18 AWG stranded wire).


- 1) 1st Terminal Engagement 3.2 MV ± 10%
- 2) 10th Terminal Engagement 3.4 MV ± 10%

The above voltage is measured across the friction connection of pin. The voltage drop is approximately 1 MV greater when including the mated terminals plus both crimps. In this case the probes should be placed on the wire approximately 1" from the crimp barrel.

5.3 High Voltage Test

Terminals mounted in a connector must withstand 1500 volts RMS applied between adjacent terminals for 60 seconds without breakdown.

REFERENCE: QC spec M-50-003

SEE D SHEET 1	FILMED MICROFILMED	C 8-17-72	REVISIONS B REWORK A 5-21-71	UNLESS OTHERWISE SPECIFIED		.062 MINIATURE PIN TERMINALS	
				TOLERANCES:		MOLEX PRODUCTS CO.	
				3-PLACE DEC. DIMS	± .005	DATE	4/27/71
				2-PLACE DEC. DIMS	± .010	 DOWNERS GROVE, ILL. 60515, U.S.A.	Page 5 of 5
				FRACTIONAL DIMS	± 1/64		PS -02-06
				ANGULAR	± 1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS. UNLESS OTHERWISE SPECIFIED.				DRWG BY	CHK'D BY	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO THE MOLEX PRODUCTS COMPANY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	
DO NOT SCALE DRAWING							