


Liquidtight Flexible Metal Conduit Fittings

Liquidtight Sealing Gasket

Sealing Ring with Stainless Steel Retainer

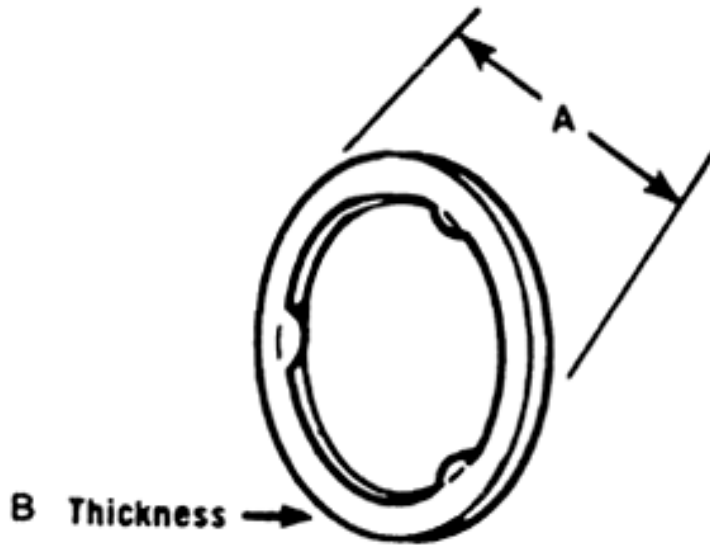

NEMA 3R, 4, 6 & 13

For use with T&B Fittings. Sealing material resists oil, coolants, and hydraulic fluids as well as water.

Dimension Information In F.P.S (U.S)

Catalog No	Dim A (In.)	Dim B (In.)	Conduit Size
5263	1.490	0.190	3/4"

U.S. Pat. 3,575,429

Packaging Information

Catalog#	Unit Quantity	Standard Quantity Package	Weight (lbs.)	Weight UOM
5263	25	50	1.600	Per 100

Listed / Certified By



UL Listed

(Catalog# 5263)
(File# 13938)



CSA Certified

(Catalog# 5263)
(File# 2884,4484)

All materials are subject to change without notice. Copyright © 2000 Thomas and Betts Corporation. All rights reserved.