World Leader in Network and Electrical Solutions

Printer Friendly

HOME | SOLUTIONS | RESOURCES | PRODUCTS | SERVICES | LEARNING

SEARCH

Current refinements (click **x** to remove)

Search Tips 👩

Your search criteria matched only one product, shown below.



- Couples two female disconnects to one male disconnect (all .250 x .032)
- Multiple connection points allow additional circuits to be added to existing equipment without expensive rework
- Disconnect can be inserted and removed from the male tab without the use of tools for lower installed cost

Related Products

Male Disconnect, Non-Insulated - Bu... Female Disconnect, Non-Insulated &#.. Wire and Cable Stripping Tools

Part Number: D-250A-C **RoHS Compliancy** Compliant Status: Part Description: Disconnect Adapter, 22-18 AWG wire, couples two female and one male tab (all .250 X .032), non-insulated. Product Type: Disconnects Length (In.): .82 Width (In.): .57 Angle: extra angle Tab Size (In.): .250 x .032 Min. Order UOM: PC Min. Order Qty.: 100 BOM Qty. (# of Pkgs.)

Add to My Catalog

Please register to utilize the 'Bill of Materials', 'Submit Quotes' and 'My Catalog' features.

View Content Details

Evaluate **Design a Solution** Part Drawings:

> Disconnect Adapter, Non-Insulated: D-2... **Design a Solution**

Part Drawings:

Disconnect Adapter, Non-Insulated: D-250A pdf


legal information privacy policy | site map

Copyright © 1995-2008, PANDUIT CORP. All rights reserved.


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- 1. D-250A DISCONNECT ADAPTER
 COUPLES TWO FEMALE DISCONNECTS
 TO ONE MALE DISCONNECT
 ALL .250 X .032 (6.3 X 0.8)
- 2. MATERIAL: A. STAMPING: TIN PLATED BRASS
- 3. PACKAGE QTY:
 A. STD: -C = 100
 B. BULK: -M = 1000
- 4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- 5. MAXIMUM OPERATING TEMPERATURE: 130 C°

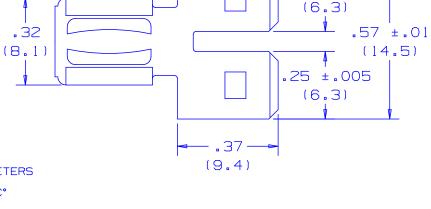

.25 ±.005



	_							_
06	9/04	JHNI	J	ADDED NOTE 5.				A41323_06
05	1/01	RM	SKB	FILESPEC WAS N41323AA_PCD_04	08925	JAC	ССН	
04	12/94	ТН		ADDED TOLERANCES	02707			CORP. TINLEY PARK, ILLINOIS
03	5/92	ВК	RLS	UPDATED NOTES TAB WIDTH DIMENSION WAS .25 (6.4)	00967		KS	.250 (6.3) DISCONNECT ADAPTER D-250A
2	8-88	DW		REDRAWN WITH REVISIONS			JB	.250 (6.3) DISCONNECT ADAPTER D-250A
REV	DATE	BY	СНК	DESCRIPTION	ECN #	CUST	РМ	DAW CHK'D CJH SCALE NONE DRAWING NO.