

G4 Digital DC Input Modules

Features

- 4000 volts transient optical isolation
- Built-in LED status indicator
- Small footprint design, reducing mounting space by approximately 50 percent
- Built-in filtering for transient suppression and noise rejection
- Operating temperature: -30 °C to 70 °C
- UL recognized, CSA certified, CE approved
- Passes NEMA Showering Arc Test (ICS 2-230)
- Meets IEEE Surge Withstand Specification (IEEE-472)

Description


Opto 22's G4 DC input modules are used to detect on/off DC voltage levels. Each module provides up to 4000 volts (transient) of optical isolation between field inputs and the logic output of the circuit.

All DC input modules except the G4IDC5K and G4IDC5D are designed with filtering on the input and a hysteresis amplifier, providing high noise rejection and transient-free, "clean" switching. The G4IDC5K is a fast-switching module used to detect signals produced by photoelectric switches and TTL devices. The low-cost G4IDC5D is used for data acquisition.

The G4IDC5MA is a special module featuring a manual-on/manual-off/automatic switch, ideal for diagnostic testing of control applications.

The G4IDC5-SW and G4IDC5-SWNC modules supply power to an external dry contact switch and sense switch closure (SW) or opening (SWNC).

Typical applications for DC input modules include sensing the presence or absence of voltage and sensing contact closure from sources such as proximity switches, limit switches, selector switches, push buttons, photoelectric switches, and TTL-compatible devices.

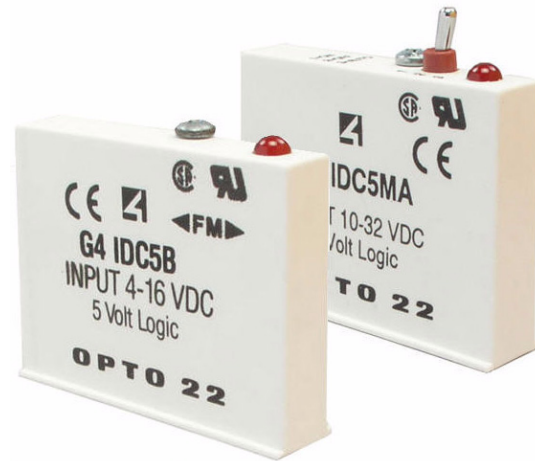

Opto 22 G4 digital input modules include the G4IDC5B high-speed module and the G4IDC5MA module with manual-on/manual-off/automatic switch for diagnostic testing.

Part Numbers

| Part | Description |
|-------------|--|
| G4IDC5 | G4 DC Input 10–32 VDC, 5 VDC Logic |
| G4IDC5B | G4 DC Input 4–16 VDC, 5 VDC Logic High Speed |
| G4IDC5D | G4 DC Input 2.5–28 VDC, 5 VDC Logic |
| G4IDC5G | G4 DC Input 35–60 VDC, 5 VDC Logic |
| G4IDC5K | G4 DC Input 2.5–16 VDC, 5 VDC Logic Very High Speed |
| G4IDC5MA | G4 DC Input 10–32 VDC, 5 VDC Logic With Manual/Auto Switch |
| G4IDC5-SW | G4 Switch Status Input, Self-powered, Normally Open |
| G4IDC5-SWNC | G4 Switch Status Input, Self-powered, Normally Closed |
| G4IDC15 | G4 DC Input 10–32 VDC, 15 VDC Logic |
| G4IDC24 | G4 DC Input 10–32 VDC, 24 VDC Logic |

G4 Digital DC Input Modules


Specifications (cont.)

| | Units | G4IDC5K | G4IDC5MA | G4IDC15 | G4IDC24 |
|--|-----------------------|---------------|-------------------|----------------|----------------|
| Input voltage range | VDC VAC | 2.5-16 — | 10-32 12-32 | 10-32 12-32 | 10-32 12-32 |
| Key feature | | Highest speed | Diagnostic switch | — | — |
| Input current at maximum line | mA | 30 | 25 | 25 | 25 |
| Isolation, input-to-output (transient): | | | | | |
| 1 ms | V | 4000 | 4000 | 4000 | 4000 |
| 1 minute | V | 1500 | 1500 | 1500 | 1500 |
| Turn-on time | ms | 0.025* | 5 | 5 | 5 |
| Turn-off time | ms | 0.025* | 5 | 5 | 5 |
| Input allowed for off-state | mA, V | 0.2, 1 | 1, 3 | 1, 3 | 1,3 |
| Nominal output supply voltage | VDC | 5 | 5 | 15 | 24 |
| Output supply voltage range | VDC | 4.5-6 | 4.5-6 | 12-18 | 20-30 |
| Output supply current at nominal logic voltage | mA | 12 | 12 | 15 | 18 |
| Input resistance (R1 in schematic) | ohms | 500 | 1.5 K | 1.5 K | 1.5 K |
| Control resistance (Rc in schematic) | ohms | 220 | 220 | 1 K | 2.2 K |
| Output voltage drop | V @ 50 mA | 0.4 | 0.4 | 0.4 | 0.4 |
| Output current (sinking) | mA | 50 | 50 | 50 | 50 |
| Output leakage with no input | microamps @ 30 VDC | 100 | 100 | 100 | 100 |
| Transistor | V breakdown | 30 | 30 | 30 | 30 |
| Temperature: | | | | | |
| Operating | °C | -30 to +70 | -30 to +70 | -30 to +70 | -30 to +70 |
| Storage | °C | -30 to +85 | -30 to +85 | -30 to +85 | -30 to +85 |

* At 5Vp-p square wave input, 50% duty cycle.

G4 Digital DC Input Modules

Dimensions

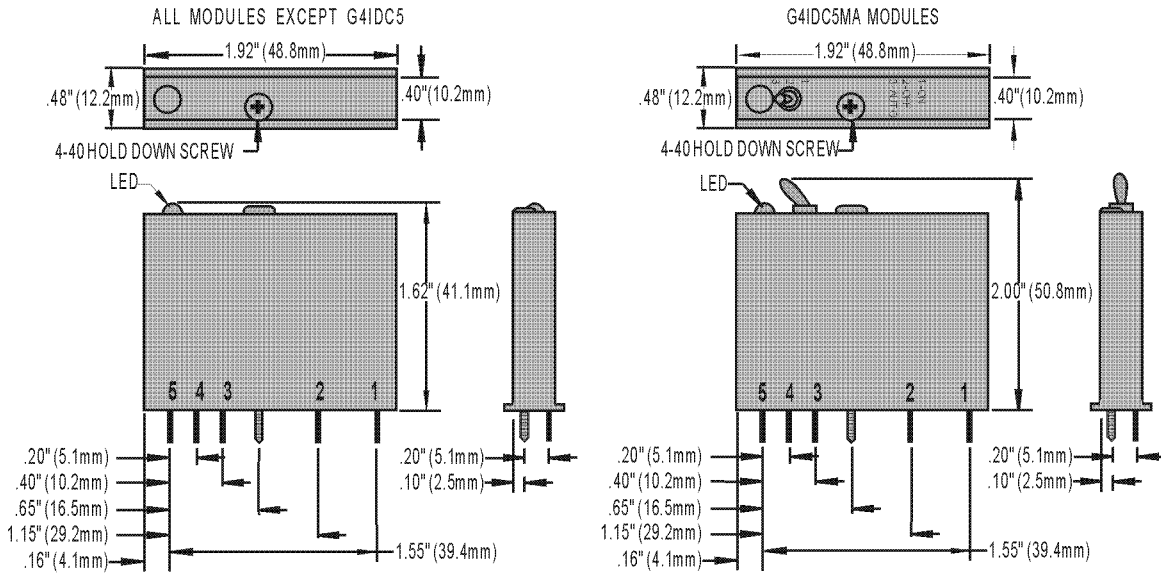

Schematics

