




- Features**
- ◆ High Attenuation Wide Band Two Stage Filter
 - ◆ Screw Terminals with Cover
 - ◆ Low Profile, Metal Case

Specifications		MODELS	MB1206	MB1210	MB1216	MB1220	MB1236
ITEMS							
Rated Voltage (AC,DC)	V	250V					
Rated Current (AC,DC) (1)	A	6	10	16	20	36	
Test Voltage (terminal to case, AC 1 min.)	V	2500V (20mA) at 25°C, 70% RH					
Isolation Resistance (terminal to case, 500VDC)	Ω	100M Ohms min. at 25°C, 70% RH					
Leakage Current	-	125V, 60Hz =0.5mA max.; 250V, 60Hz =1mA max.					
DC Resistance	mΩ	140	50	34	20	9	
Temperature Rise	°C	40°C max.					
Operating Temperature (1)	°C	-25 to +85°C					
Operating Humidity	%	30% to 95% RH (non-condensing)					
Storage Temperature	°C	-40 to +85°C					
Storage Humidity	%	10% to 95% RH (non-condensing)					
Vibration	-	Sweep:10-55-10Hz (1min.), Amplitude 1.5mm X, Y, and Z axes, 2 hours each					
Safety Standard	-	UL1283, CSA C22.2 No.8 (C-UL), VDE0565 Teil3, Teil3A2, and EN133200 (VDE)					

Notes:
 (1) Value at Ta ≤ 35°C. Refer to the derating curve at Ta > 35°C.

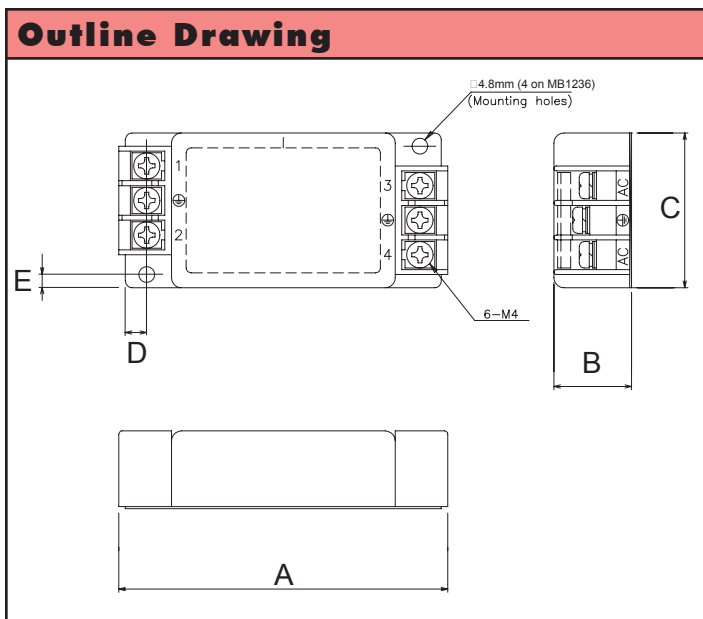

Dimensions

Model	A	B	C	D	E	Weight (g)
MB1206	100	23.6	47	6.5	4	190
MB1210	107	26	47	6.5	4	220
MB1216	117	30	47	6.5	4	310
MB1220	151	35	52	6.5	4	530
MB1236	151	35	67	7.5	6.5	660