

Catamount®




T&B Catalog Number: L-18-120-9-L
UPC Number: 72849491271
Description: Cable Tie 120lb 18" Natural All-Nylon 50 Per Bag

Status: Active

| General | |
|------------------------------------|----------------------|
| Material | Nylon 6.6 |
| Color | Natural |
| Dimension Information | |
| Length (inches) | 18.0 |
| Width (inches) | 0.300 |
| Max. Wire Bundle Diameter (inches) | 4 7/8 |
| Min. Wire Bundle Diameter (inches) | 3/16 |
| Specifications | |
| Tensile Strength (lbs.) | 120 |
| Temperature Rating | -40°F to 185°F |
| Flammability Rating | UL 94 V-2 |
| Tooling | |
| Application Tools | ERG120 |
| Packaging | |
| T&B Order Multiple | 50 |
| T&B Inner Pack | 50 |
| Package in Units | 500 |
| Package Type | Standard |
| T&B Sold in UOM | Each |
| T&B Weight Per UOM | 18.8 lbs. per 1000 |
| Application Support | |
| Overview | Available on Website |
| Material Selection Guide | Available on Website |
| Available Colors | Available on Website |
| Certifications | |
| RoHS Compliance | Yes |
| Certifications | |



Ty-Fast® Cable Ties

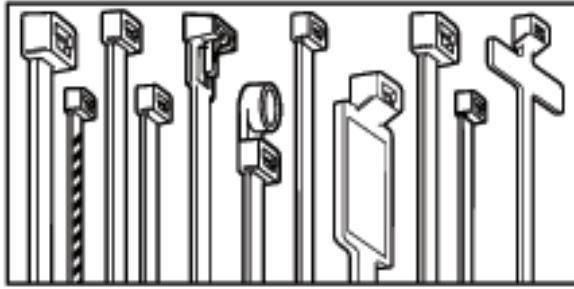

- MINIATURE
- HEAVY DUTY
- INTERMEDIATE
- EXTRA HEAVY DUTY
- STANDARD
- RELEASABLE TIES

- MOUNTING HEAD
- STRIPED TIES
- RESTRICTED BUNDLE
- IDENTIFICATION TIES
- MIL-SPEC TIES

Ty-Fast® Cable Ties are available in lengths from 4" to our exclusive 48" strap. Cable Ties will satisfy bundling requirements from 1/8" to 15" and loop tensile strengths from 18 to 175 pounds.

Cable Ties are stocked in materials and colors as listed. Contact your Ty-Fast® Distributor or Customer Service Representative for availability in special materials and colors.

Where applicable, Ty-Fast® Cable Ties are UL Recognized, Mil-Spec Approved and/or QPL Listed.

State-of-the-art robotic and raw material handling equipment assures product and material integrity throughout the manufacturing process. Overall quality is achieved through statistical analysis and quality driven operator objectives. Ty-Fast® has attained Mil-Spec I-45208 quality ratings from a number of equipment manufacturers.

Ty-Fast® products are sold through stocking T&B Distributors.

Strict Tolerances Assure Locking Strength

Reinforced Head and Strap Transition for Added Strength

Highly Engineered Tooth and Pawl Design for Maximum Engagement

Bent Tip Design for Easier Assembly


Recessed Entry to Guide Insertion

Generous Radii on All Angles to Reduce Friction

Gradual Strap to Tail Transition for Lower Insertion Force

Raised Grips on Tail to Assist Operators

Ty-Rap®/Ty-Fast®

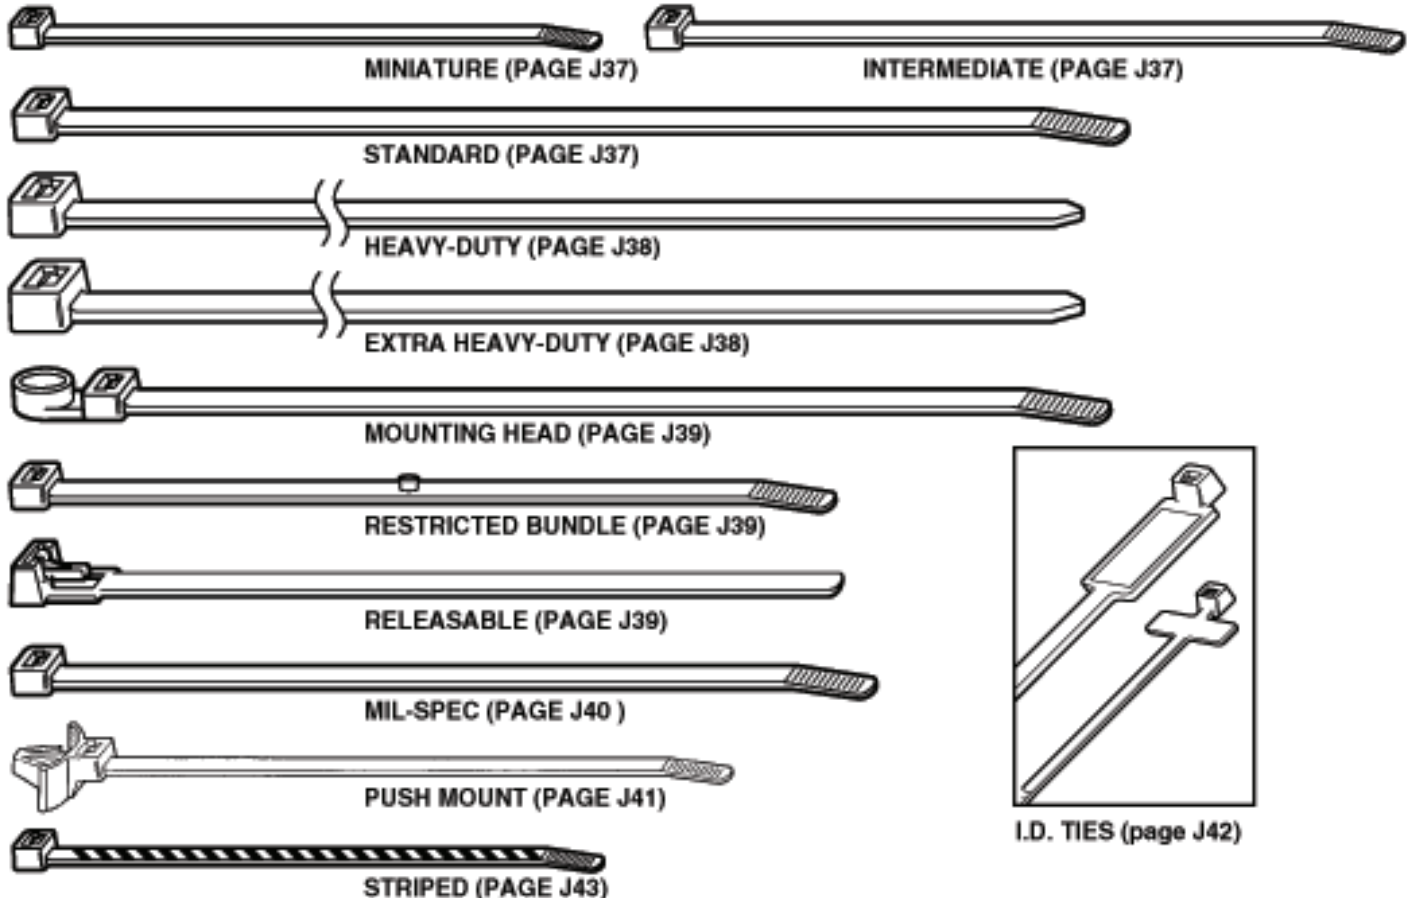

Thomas & Betts

Catamount® Cable Ties

Catamount® Ties and Terminals fit the needs of general-purpose fastening and wire terminations. Installers quickly discover that Catamount products offer durable and value-priced cable bundling for a variety of commercial and residential construction applications. Electricians can also take advantage of other benefits in stocking Catamount products in their toolboxes, such as more terminals per bag in most popular sizes than leading comparable brands.

Catamount Ties and Terminals are offered in a wide range of sizes, styles and colors and meet listing requirements for most electrical termination and fastening projects. A choice of matching tools are also offered to provide quick and reliable installations.

Miniature — Series 18

| CAT. NO. | LENGTH (IN.) | MAX. BUNDLE DIA. | COLOR | STD. QTY. |
|------------|--------------|------------------|---------|-----------|
| L-4-18-9-C | 4.0 | 1/8 | Natural | 100 |
| L-4-18-0-C | 4.0 | 1/8 | Black | 100 |
| L-6-18-9-C | 6.4 | 1 1/8 | Natural | 100 |
| L-6-18-0-C | 6.4 | 1 1/8 | Black | 100 |
| L-8-18-9-C | 8.0 | 2 | Natural | 100 |
| L-8-18-0-C | 8.0 | 2 | Black | 100 |

Bulk packages available. Contact Customer Service.

Use GC-102, L-200, L-400-C or ERG-50 Installation Tools

Intermediate — Series 30

| CAT. NO. | LENGTH (IN.) | MAX. BUNDLE DIA. | COLOR | STD. QTY. |
|-------------|--------------|------------------|---------|-----------|
| L-5-30-9-C | 5.6 | 1 1/8 | Natural | 100 |
| L-5-30-0-C | 5.6 | 1 1/8 | Black | 100 |
| L-8-40-9-C | 8.5 | 2 | Natural | 100 |
| L-8-40-0-C | 8.5 | 2 | Black | 100 |
| L-11-40-9-C | 11.5 | 3 | Natural | 100 |
| L-11-40-0-C | 11.5 | 3 | Black | 100 |
| L-14-40-9-C | 14.5 | 4 | Natural | 100 |
| L-14-40-0-C | 14.5 | 4 | Black | 100 |

Bulk packages available. Contact Customer Service.

Use GC-102, L-200, L-400-C or ERG-50 Installation Tools

Standard — Series 50

| CAT. NO. | LENGTH (IN.) | MAX. BUNDLE DIA. | COLOR | STD. QTY. |
|-------------|--------------|------------------|---------|-----------|
| L-5-50-9-C | 5.5 | 1 | Natural | 100 |
| L-5-50-0-C | 5.5 | 1 | Black | 100 |
| L-7-50-0-C | 7.5 | 1 1/8 | Natural | 100 |
| L-7-50-9-C | 7.5 | 1 1/8 | Black | 100 |
| L-11-50-9-C | 11.1 | 3 | Natural | 100 |
| L-11-50-0-C | 11.1 | 3 | Black | 100 |
| L-14-50-9-C | 14.1 | 4 | Natural | 100 |
| L-14-50-0-C | 14.1 | 4 | Black | 100 |

Bulk packages available. Contact Customer Service.

Use GC-102, L-200, L-400-C or ERG-50 Installation Tools

Heavy-Duty — Series 120

| CAT. NO. | LENGTH (IN.) | MAX. BUNDLE DIA. | COLOR | STD. QTY. |
|--------------|--------------|------------------|---------|-----------|
| L-8-120-9-C | 8.0 | 2 | Natural | 100 |
| L-8-120-0-C | 8.0 | 2 | Black | 100 |
| L-11-120-9-C | 11.1 | 3 | Natural | 100 |
| L-11-120-0-C | 11.1 | 3 | Black | 100 |
| L-14-120-9-C | 14.2 | 4 | Natural | 100 |
| L-14-120-0-C | 14.2 | 4 | Black | 100 |
| L-18-120-9-L | 18.0 | 4 1/2 | Natural | 50 |
| L-18-120-0-L | 18.0 | 4 1/2 | Black | 50 |
| L-24-120-9-L | 24.2 | 7 | Natural | 50 |
| L-24-120-0-L | 24.2 | 7 | Black | 50 |
| L-28-120-9-L | 28.0 | 9 | Natural | 50 |
| L-28-120-0-L | 28.0 | 9 | Black | 50 |

Use L-300C or ERG-120 Installation Tool

Extra Heavy-Duty — Series 175

| CAT. NO. | LENGTH (IN.) | MAX. BUNDLE DIA. | COLOR | STD. QTY. |
|--------------|--------------|------------------|---------|-----------|
| L-24-175-9-L | 24.0 | 7.2 | Natural | 50 |
| L-24-175-0-L | 24.0 | 7.2 | Black | 50 |
| L-34-175-9-L | 34.0 | 10 | Natural | 50 |
| L-36-175-9-L | 36.0 | 10 1/2 | Natural | 50 |
| L-36-175-0-L | 36.0 | 10 1/2 | Black | 50 |
| L-41-175-9-L | 41.0 | 12 | Natural | 50 |
| L-41-175-0-L | 41.0 | 12 | Black | 50 |
| L-48-175-9-L | 48.0 | 15 | Natural | 50 |
| L-48-175-0-L | 48.0 | 15 | Black | 50 |

Use L-300C Installation Tool

Identification Ties

| CAT. NO. | LENGTH (IN.) | MAX. BUNDLE DIA. | COLOR | STD. QTY. |
|--------------|--------------|------------------|---------|-----------|
| L-7-50ID-9-C | 7.875 | 1 1/8 | Natural | 100 |
| L-4-18ID-9-C | 4.0 | 1/8 | Natural | 100 |

Bulk packages available. Contact Customer Service.

Use GC-102, L-200 or L-400-C Installation Tool

Sample Catalog Order:



4" Length, 18-lb. Tensile Strength, Natural Color, 100-Pack Quantity

Color Table

- 0 - Black
- 1 - Brown
- 2 - Red
- 3 - Orange
- 4 - Yellow
- 5 - Green
- 6 - Blue
- 7 - Purple
- 8 - Gray
- 9 - Natural (UV Resistant)
- 11 - Fluorescent Pink
- 16 - Fluorescent Orange
- 17 - Fluorescent Yellow
- 18 - Fluorescent Green
- 20 - Fluorescent Blue