



## Products

### Neon & Incandescent Indicators


CML IT offers panel mount indicators manufactured with LED, Neon or Incandescent light sources. These indicators are available in a number of different lens and termination styles, with voltages of 2V ~ 250V available off-the-shelf.



**Part Number:** 6063-001-634R  
**Serial Number:** 6063  
**Light Source:** Neon  
**Color:** Red  
**Voltage (V):** 125VAC  
**Mounting Hole (inch):** 0.38  
**Mounting Hole (metric):** 9.5  
**Termination:** 6" 22 AWG wire  
**Bezel color:** Red  
**Housing color:** Red  
**UL file:** E20325  
**CSA file:** LR13346  
**RoHS Status:** Yes

**Glo-Lite Neon Indicator Lights**

**DESCRIPTION AND FEATURES**

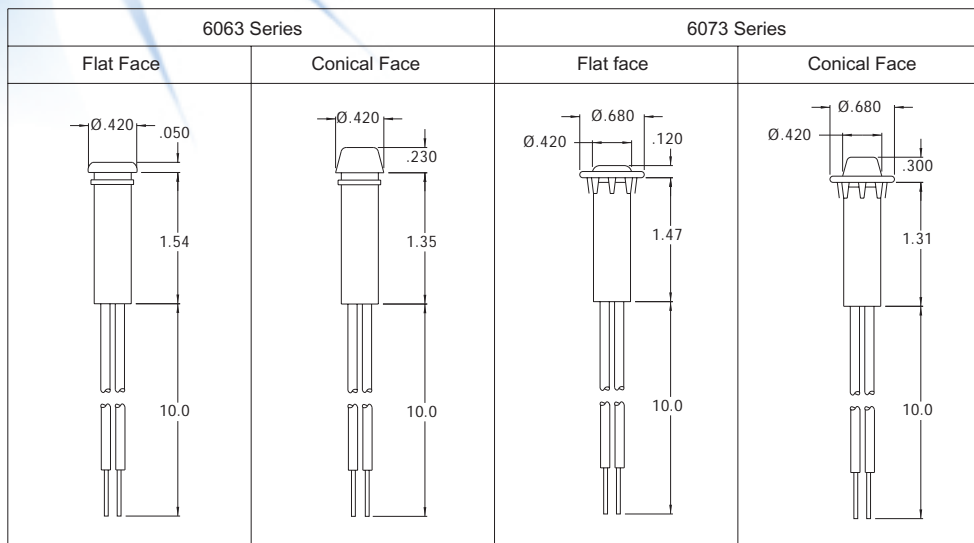

All dimensions in inches.

The Chicago Miniature Lamp Glo-Lite Indicator Lights are designed for applications requiring a low cost, line voltage, power-on indicator. These indicator lights utilize a high brightness C2A neon lamp providing good visibility and a long life. These indicator lights are constructed with a one-piece body and lens and are available in two face configurations, flat or conical, with or without a chrome bezel.

**SPECIFICATIONS**

Part Number:	Description
6063-001-534R	Red, Flat Face, No Bezel
6063-001-634R	Red, Conical Face, No Bezel
6073-001-534R	Red, Flat Face, Chrome Bezel
6073-001-634R	Red, Conical Face, Chrome Bezel
As special order, these indicator lights are available with white, amber or green lenses	

Mounting Hole:	.375 for 6063 Series, .500 for 6073 Series
Mounting Centers:	.500 for 6063 Series, .688 for 6073 Series
Maximum Panel Thickness:	1.25 for 6063 Series, .078 for 6073 Series
Housing/Lens Material:	Nylon
Bezel (6073 Series only):	Chrome Plated Brass
Wire Leads:	22 AWG, black 105°C PVC Insulation, stranded
Electrical:	125 Volts AC, Built-in 30K ohm 1/4 Watt resistor
Approvals:	UL recognized, CSA certified