



Audio

NEUTRIK

Deutsche Version

- Home
- About Us
- Products
- Support
- News
- Sitemap

Search

Products only

© Neutrik® AG
All rights reserved
Legal Notices



Audio

Adapter

[back](#)

[Print](#)



NL4MMX



4 pole lockable coupler, links two NL2/4FCs together for cable extension. Can be permanently attached to NL2/4FC.




Secure Lock!

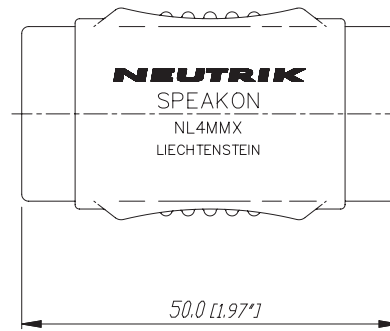

				Werkstoff:	Maßstab:	Datum	Name
			*Lieferant darf ohne Rücksprache nicht geändert werden		2:1	27.02.2002	Baltogg
			Zeichnung urheberrechtlich geschützt (DIN 94) (C)				
			Beneennung:	Speakon NL 4MMX		Ersetzt durch	Blatt
						Ersatz fuer:	von Blatt
				NEUTRIK AG FL-9494 SCHAAN		Zeichn. Nr.:	
Ink.	Aenderung	Datum	Name				



NL4MMX

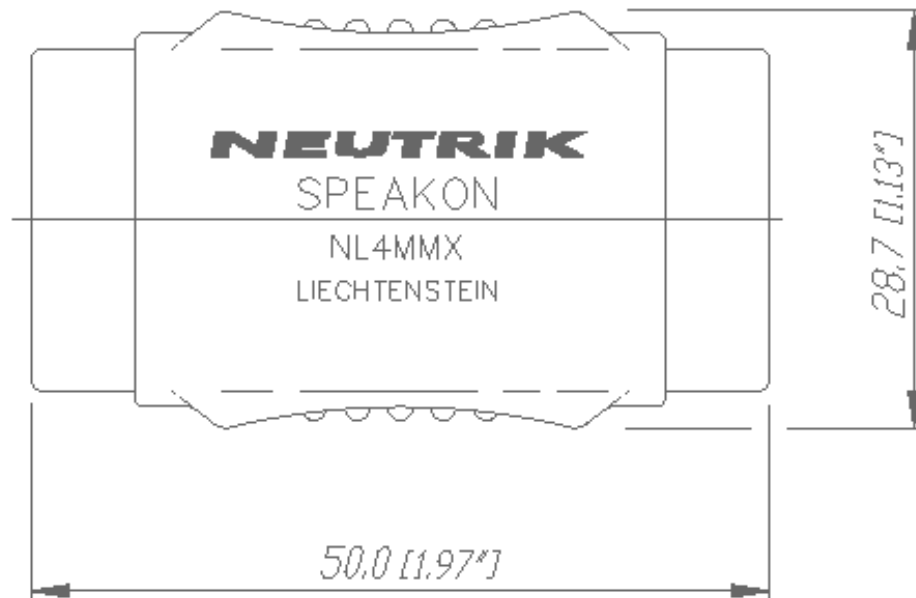

There are no technical infos for this product.

Product	
Connector Type	Speakon
Gender	male
Electrical	
Contact resistance	≤ 3 mΩ (after lifetime)
Dielectric strength	4 kVdc (peak)
Insulation resistance	> 1 GΩ (after dampheat)
Rated current per contact	20 A
Rated voltage	250 V (Insulation)
Mechanical	
Lifetime	> 5000 mating cycles
Locking device	Quick Lock
Material	
Contact plating	4 μm Ag

Contacts	Bronze (CuSn6)
Insert	Polyamide (PA 6 30 % GR)
Shell	Polyamide (PA 6 30 % GR)
Environmental	
Flammability	UL 94 HB
Solderability	Complies with IEC 68-2-20
Temperature range	-30 °C to +80 °C
Optical	
Mobile Cables	