

# Micro Commercial Components Corp.

**Complete Discrete Semiconductor Solutions** 

Part Number	1N54O4	
product family	STANDARD RECOVERY RECTIFIERS	
package type	DO-201AD	
VRM(PRV)	400V	
lfsm	200A	
IF(AV)	3.0A	
@Vf	1.0V	
@lf	3.0A	
Trr		
IR	5.0μΑ	
@VR	400V	
Package Qty	Bulk: 500pcs/Box, 12K/Ctn ; Tape : 1.2K/Reel, 4.8K/Ctn; T/B: 1.2K/Ammo Box, 12K/Ctn.	
his product is listed unde Dodes Itandard Recovery Rectifi	er the following categories where you may find similar products:	



### Features

- Low Current Leakage and Low Forward Voltage
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

## **Maximum Ratings**

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 30 °C/W Junction To Lead

MCC	Device	Maximum	Maximum	Maximum
Catalog	Marking	Recurrent	RMS	DC
Number		Peak	Voltage	Blocking
		Reverse		Voltage
		Voltage		
1N5400	1N5400	50V	35V	50V
1N5401	1N5401	100V	70V	100V
1N5402	1N5402	200V	140V	200V
1N5404	1N5404	400V	280V	400V
1N5405	1N5405	500V	350V	500V
1N5406	1N5406	600V	420V	600V
1N5407	1N5407	800V	560V	800V
1N5408	1N5408	1000V	700V	1000V




Average Forward Current	I <sub>F(AV)</sub>	3.0A	T <sub>a</sub> = 105°C
Peak Forward Surge Current	I <sub>FSM</sub>	200A	8.3ms, half sine
Forward Voltage	V <sub>F</sub>	1.0V	I <sub>F</sub> = 3.0A; T <sub>a</sub> = 25°C
Maximum DC Reverse Current At Rated DC Blocking Voltage	I <sub>R</sub>	5.0μΑ 100μΑ	T <sub>a</sub> = 25°C T <sub>a</sub> = 150°C
Typical Junction Capacitance	CJ	40pF	Measured at 1.0MHz, V <sub>R</sub> =4.0V

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

# 1N5400 THRU 1N5408

## 3 Amp Rectifier 50 - 1000 Volts

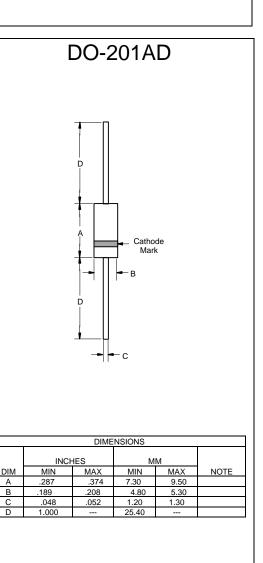



### **Ordering Information**

Device	Packing		
(Part Number)-TP	Tape&Reel 1.2Kpcs/Reel		
(Part Number)-AP	Ammo Packing;1.2Kpcs/AmmoBox		
(Part Number)-BP	Bulk;500pcs/Box		

#### \*\*\*IMPORTANT NOTICE\*\*\*

Micro Commercial Components Corp. reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by Micro Commercial Components Corp. are not intended for use in Medical,

Aerospace or Military Applications.