

Product Catalog > [Diodes](#) > [Small Signal Schottky Diodes](#) >

Part Number	SD103C
product family	SMALL SIGNAL SCHOTTKY DIODES
package type	DO-35
VRM(PRV)	20V
Ifsm	15A
IF(AV)	
@Vf	0.37V
@If	20mA
Trr	10nS
IR	5.0μA
@VR	20V
Package Qty	Bulk: 10K/Box, 100K/Ctn ; Tape : 10K/Reel, 50K/Ctn;

This product is listed under the following categories where you may find similar products:
[Diodes](#)
[Small Signal Schottky Diodes](#)

SD103A THRU SD103C

Small Signal Schottky Diodes

Features

- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Low Reverse Recovery Time
- Low Reverse Capacitance
- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection

Mechanical Data

- Case: DO-35, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Indicated by Cathode Band
- Moisture Sensitivity: Level 1 per J-STD-020C


Maximum Ratings @ 25°C Unless Otherwise Specified

Characteristic	Symbol	SD103A	SD103B	SD103C
Peak Repetitive Reverse Voltage	V_{RRM}			
Working Peak Reverse Voltage	V_{RWM}	40V	30V	20V
DC Blocking Voltage	V_R			
RMS Reverse Voltage	$V_{R(RMS)}$	28V	21V	14V
Maximum single cycle surge 60Hz sine wave	I_{FSM}	15A		
Power Dissipation (Note 2)	P_d	400mW		
Thermal Resistance, Junction to Ambient	R	300K/W		
Junction Temperature	T_j	125°C		
Operation/Storage Temp. Range	T_{STG}	-55 to +150°C		

Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Symbol	Type	Max	Test Condition
SD103A			5.0uA	$V_R=30V$
Leakage Current	I_R	-----	5.0uA	$V_R=20V$
SD103B			5.0uA	$V_R=10V$
SD103C			5.0uA	$V_R=10V$
Maximum Forward Voltage Drop	V_{FM}	-----	0.37V 0.60V	$I_F=20mA$ $I_F=200mA$
Junction Capacitance	C_j	50pF	-----	$V_R=0V, f=1.0MHz$
Reverse Recovery Time	t_{rr}	10ns	-----	$I_F=I_R=50mA, \text{recover to } 200mA/0.1I_R$

DO-35

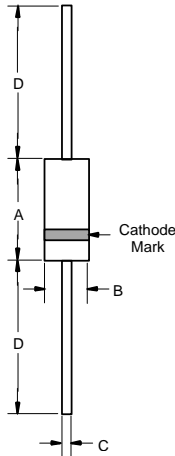

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.166	---	4.2	
B	---	.079	---	2.00	
C	---	.020	---	.52	
D	1.000	---	25.40	---	

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.
2. Valid provided that electrodes are kept at ambient temperature



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel; 10Kpcs/Reel
(Part Number)-AP	Ammo Packing;5Kpcs/AmmoBox
(Part Number)-BP	Bulk;500pcs/Bag

IMPORTANT NOTICE

Micro Commercial Components Corp .reserve the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* . and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.