

◆ Home > 5219284F

Part Number: **5219284F**


General Description

Series	521
Configuration	5 mm Lens
Description	Discrete LED Lamp
Package Options	Bulk Packaging
Sizes	5mm
Lamp Type	Single Color
Lens Color	Diffused

Absolute Maximum Ratings (Ta = 25°)

Derating	from 50° @ .071V/°C
Solder Temperature	260° for 5 sec
Operating Temperature	-40 ~ +85
Storage Temperature	-55 ~ +100

Operating Characteristics

Color	 Yellow
LED Type	Standard Efficiency
Luminous Intensity Min	2
Luminous Intensity Typical	8
Test Current mA	5V




This is a
RoHS Compliant Product
To learn more click here



5mm Discrete LED Integral Resistor, 5 Volts Diffused

Dialight

521-9183, -9284

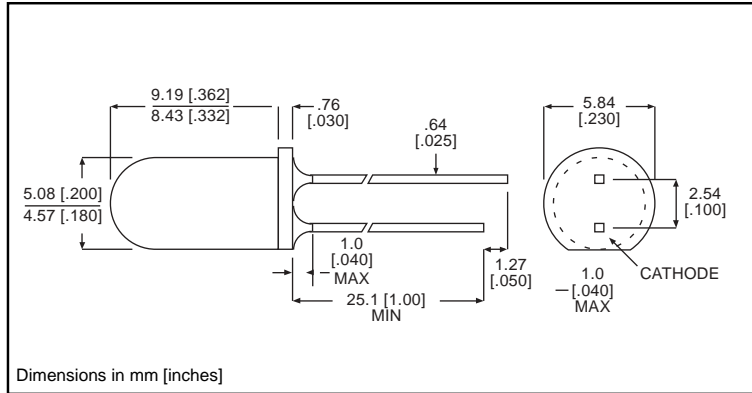

PART NO.	LED COLOR
521-9183	Red
521-9284	Yellow

MOUNTING CLIP: 515-0004
located on page 6-48

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)	Red	Yellow
	-9183	-9284
Forward Voltage (V)	7.5	7.5
Derating (V/°C) From 50°C	.071	.071
Operating Temperature (°C)	-40/+85	-40/+85
Storage Temperature (°C)	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case	

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS ($T_A=25^\circ\text{C}$)		Red	Yellow
		-9183	-9284
Luminous Intensity (mcd)	Min.	2	2
	Typical	8	8
Peak Wavelength (nm)	Typical	635	583
Viewing Angle (2θ)	Typical	60°	60°
Forward Current (I)	Typical	10	10
	Max	15	15
Reverse Voltage (V), $I_R=100\mu\text{A}$	Min.	5	5

θ is the off axis angle at which the luminous intensity is half the axial luminous intensity

6