



Audio

# NEUTRIK


Deutsche Version

- Home
- About Us
- Products
- Support
- News
- Sitemap

Search

Products only

© Neutrik® AG  
 All rights reserved  
 Legal Notices



## 1/4" Prof. Phone Plugs, X-Series

Audio back

### NP3X



Print

The heavy duty professional phone plug series improves on the design of the existing C series by offering the thinnest available A-gauge 1/4" plug with unique Neutrik chuck type strain relief on the market. The slimline shell with a width of 14.5 mm meets the most recent requirements for highest density jackfields (15.88mm jack pitch). The precise machined one-piece tip contact without rivets makes it unique and avoids hook up in a socket or break off the tip. The Plug X Series serves all applications such as guitar applications, audio cables, snakes, speakers, amplifiers and mixing desks.


3 pole 1/4" professional phone plug, nickel contacts, nickel shell

#### Features & Benefits

- Extra slim 1/4" plug for highest packing density
- Robust diecast shell in stylish design
- Improved chuck type strain relief for reliable cable retention
- Sleek design for best handling convenience
- Precision machined one-piece contacts - avoid hook up of tip contact

#### ACCESSORIES

<p>BPX-*</p> 	<p>HTXP</p> 	<p>PXR-*</p> 
--	---	--

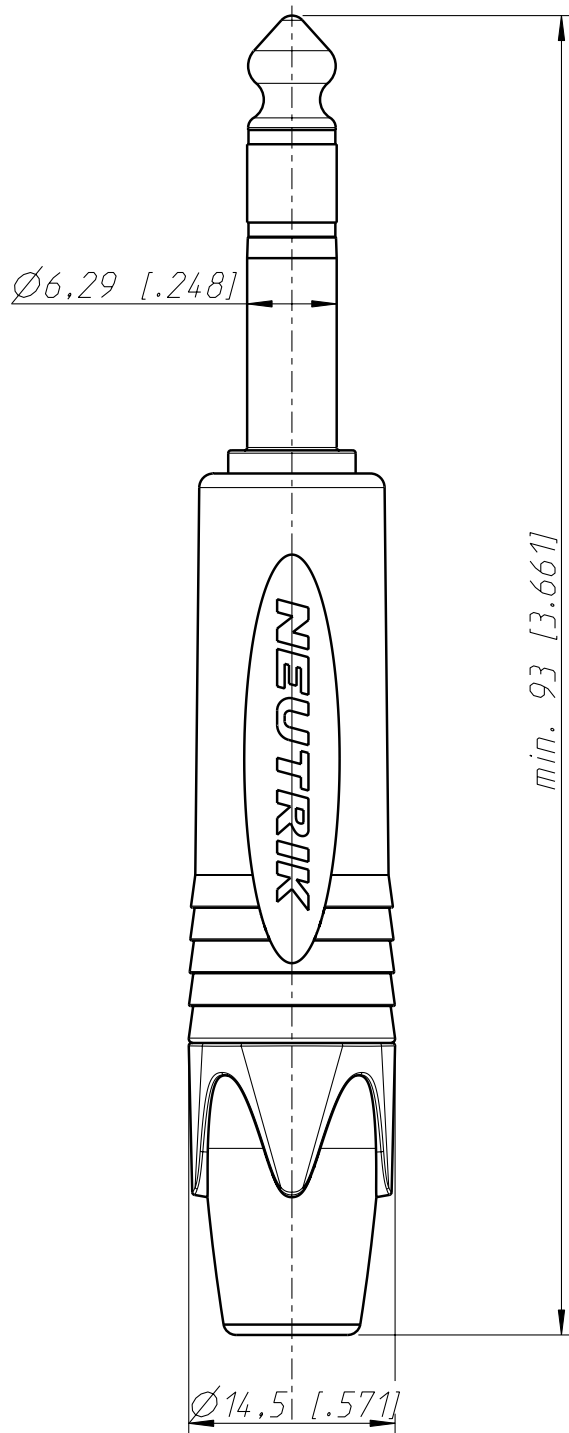

Allgemeintoleranzen ISO 2768-m	Werkstoff	Massstab:		Datum	Name
	-	2:1	Gezeichnet	26.01.04	Mijatovic
Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)	-	(A4)	Freigegeben	-	-
	-		Geaendert	-	-
Benennung	NP3X		Aend.-Nr.		Aend.-Index
	NP3X		-		-
			Ersatz fuer:		Blatt 1 von 1 Bl.
			Zeichn. Nr.		ST-NP3X
<b>NEUTRIK AG FL-9494 SCHAAN</b>					




# NEUTRIK



## 1/4" Prof. Phone Plugs, X-Series

### NP3X

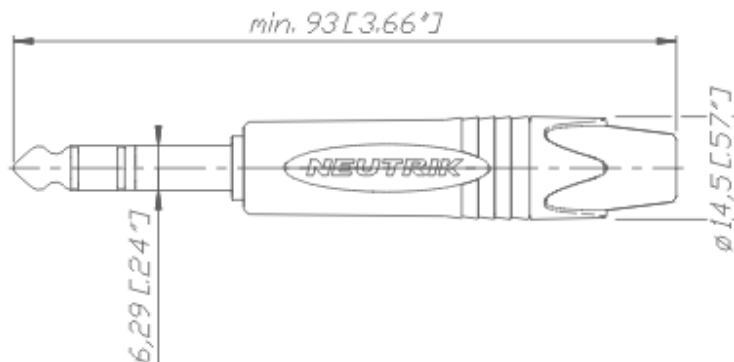

There are no technical infos for this product.

Product	
Connector Type	Plug
Gender	male
Electrical	
Contact resistance	depends on mating connector mΩ
Dielectric strength	1 kVdc
Insulation resistance	> 2 GΩ (initial)
Insulation resistance	≥ 1 GΩ (after damp heat test)
Rated current per contact	≤ 15 A
Mechanical	
Cable O.D.	4 - 7 mm
Wire size	1 mm <sup>2</sup>
Wire size	18 AWG
Wiring	Solder contacts
Material	
Bushing	Polyacetal (POM) + PU
Contact plating	2 μm Ni (Su)
Contacts	Brass (CuZn39Pb3)
Insert	Polyamide (PA 6.6 30 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Nickel
Strain relief	Polyacetal (POM)
Environmental	
Standard compliance	IEC 60603-11 / EIA RS-453

Solderability Complies with IEC 68-2-20

Temperature range -20 °C to +65 °C

**Optical**

**Mobile Cables**