

Product Catalog > [Diodes](#) > [Switching Diodes](#) >

Part Number	BAV99
product family	SWITCHING DIODES
package type	SOT-23
VRM(PRV)	75V
Ifsm	1.0A
IF(AV)	
@Vf	855mV
@If	10mA
Trr	4.0nS
IR	2.5μA
@VR	75V
Package Qty	Tape : 3K/Reel , 120K/Ctn;

This product is listed under the following categories where you may find similar products:
[Diodes](#)
[Switching Diodes](#)



Micro Commercial Components

BAV99

350mW 75Volt Dual Series Switching Diode

Features

- Low Current Leakage
- Low Cost
- Small Outline Surface Mount Package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking:A7/JG

Maximum Ratings


- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 357K/W Junction To Ambient

Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	V_R	75V	
Average Rectified Output Current	I_O	150mA	
Power Dissipation	P_{TOT}	350mW	
Peak Forward Surge Current	I_{FSM}	1.0A	$t=1s, \text{Non-Repitative}$
		2.0A	$t=1\mu s, \text{Non-Repitative}$
Maximum Instantaneous Forward Voltage	V_F^*	715mV	$I_{FM} = 1mA;$
		855mV	$I_{FM} = 10mA;$
		1000mV	$I_{FM} = 50mA;$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	2.5uA	$VR=75Volts$ $T_J = 25^\circ C$
		50uA	$VR=75Volts$ $T_J = 150^\circ C$
		30uA	$VR=25Volts$ $T_J = 150^\circ C$
Typical Junction Capacitance	C_J	2.0pF	Measured at 1.0MHz, $VR=0V$
Reverse Recovery Time	T_{rr}	4nS	$I_F=10mA$ $VR = 0V$ $RL=500\Omega$


*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

SOT-23

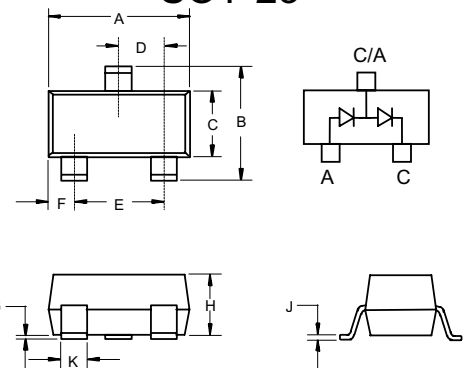

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

Suggested Solder Pad Layout

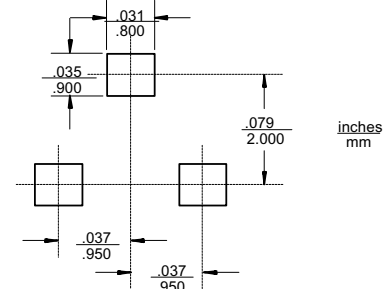



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.