

### Cooper Bussmann

[Homepage](#)  
[About Cooper Bussmann](#)  
[Contact Us](#)  
[Privacy](#)  
[Legal](#)  
[Cooper Bussmann® Brand](#)  
[Site Map](#)



**JKS-30**  
 Class J, Fast Acting Fuse, 30A

#### Product Information

Product Type:	Fuse
Product Family:	Electrical Power
Upgrade Product:	<a href="#">LPJ-30SP</a>
Brand:	Cooper Bussmann
Sub-brand:	Limitron
Class:	J

#### Recommended Products

Rec. Fuse Block:	<a href="#">J60030 Series</a>
Rec. Modular Fuse Holder:	<a href="#">CH30J Series</a>
Rec. Disconnect Switch:	<a href="#">CFD30J Series</a>
Rec. Cover:	<a href="#">SAMI-1 Series</a>

#### Physical Properties

Dimensions:	2.25in.(L) × 0.81in.(W) × 0in.(H)
-------------	-----------------------------------

#### Certifications

<a href="#">UL Listed</a>
<a href="#">CSA Certified</a>

#### Electrical Properties

Maximum AC Voltage:	600
Amperage Rating:	30
AC Interrupting Ratings:	<ul style="list-style-type: none"> <li>• 200000 at 600V</li> </ul>
Fuse Class:	Class J
Fast Acting:	Yes


# Limitron® Quick-Acting Fuses

## Class J – 600 Volt

JKS  
1-60A



### Dimensional Data

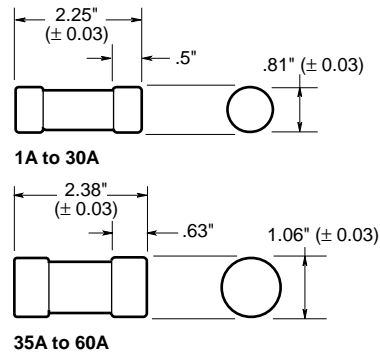

### General Information:

- Single-element, current-limiting fuses provide superior short-circuit protection.
- Protects low interrupting capacity circuit breakers. Limits the short-circuit current to meet the interrupting capacity requirements of existing equipment.
- On older systems available short-circuit current may exceed the interrupting capacity of the circuit breakers, fuses can be installed in series with existing equipment.
- Well suited for lighting and heating circuits and other non-inductive loads.
- Provides component short-circuit protection in compliance with NEC 110-10, where protection devices shall clear a fault without "extensive damage" to the circuit components.
- High interrupting rating helps meet the requirements of future system expansion and the increases in available utility short-circuit current.
- Fuses can be selectively coordinated with ease.

Catalog Symbol: JKS

Quick-Acting

Current-Limiting

Ampere Rating: 1 to 60A

Voltage Rating: 600Vac (or less)\*

Interrupting Rating: 200,000A RMS Sym.

Agency Information:

UL Listed, Std. 248-8, Class J, Guide JDDZ, File E4273

CSA Certified, C22.2 No. 248.8, Class 1422-02, File 53787

### Catalog Numbers

JKS-1	JKS-8	JKS-30
JKS-2	JKS-10	JKS-35
JKS-3	JKS-12	JKS-40
JKS-4	JKS-15	JKS-45
JKS-5	JKS-20	JKS-50
JKS-6	JKS-25	JKS-60


### Carton Quantity and Weight

Amps	Carton Qty.	Weight**	
		Lbs.	Kg.
1-30	10	0.95	0.430
35-60	10	1.175	0.532

\*15-30A rated 200VDC, 31-60A rated 175VDC and 10 KAIC.

\*\*Weight per carton.

CE

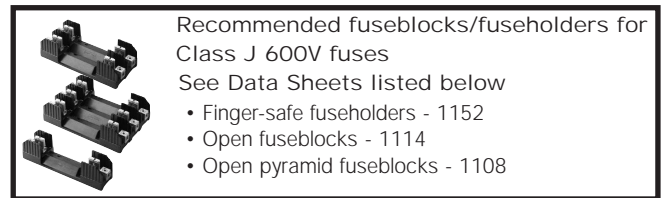

Recommended fuseblocks/fuseholders for Class J 600V fuses

See Data Sheets listed below

- Finger-safe fuseholders - 1152
- Open fuseblocks - 1114
- Open pyramid fuseblocks - 1108