


Products


Neon & Incandescent Indicators

CML IT offers panel mount indicators manufactured with LED, Neon or Incandescent light sources. These indicators are available in a number of different lens and termination styles, with voltages of 2V ~ 250V available off-the-shelf.

 <p>Technical drawing of a panel mount indicator. The top view shows a circular housing with a diameter of 0.980 inches. The front view shows a lens with a diameter of 0.870 inches and a mounting hole with a diameter of 0.810 inches. The height of the indicator is 0.140 inches, and the mounting hole diameter is 0.550 inches maximum. A note at the bottom left states: "All dimensions in inches."</p>	<p>Part Number: 2620K3 Serial Number: 2620 Light Source: Neon Color: Amber Voltage (V): 125VAC Mounting Hole (inch): 0.88 Mounting Hole (metric): 22.22 Termination: 4.5" 22 AWG wire Bezel color: White Housing color: White UL file: E20325 CSA file: LR13346 RoHS Status: Yes</p>
---	---

2620K and 2622K Series Non-Relampable Neon Indicator Light

DESCRIPTION AND FEATURES

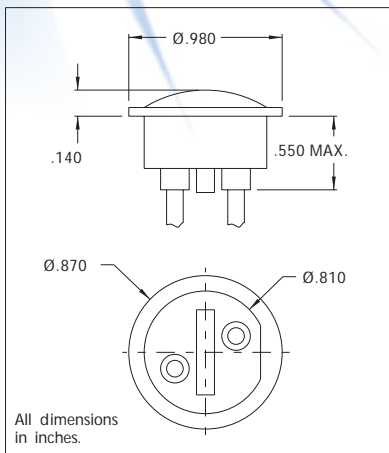

Mounting: Supplied with speednut SN2089.
 Mounting hole pattern on page SP2.

Wire Leads: No.22 AWG (105°C),
 4.40/4.80 long, stripped .430/.570

Lens: Polycarbonate

Bezel: White nylon.
 For black finish add "X" after the
 series letter(s).

Housing: White Nylon

Lens Color	Neon
	Model No. (105-125VAC) Wire Leads
Red	2620K 1
Amber	2620K 3
White	2620K 3
Green	2622K 5*
Lamp used	C 2A+R resistor

*Incorporates G2B lamp and resistor
 Underwriters Laboratories (UL) File No. E20325
 Canadian Standards Association (CSA) File No. LR13346