

## Product Detail



<b>Product Line:</b>	<a href="#">Johnson</a> (Click for customer service)
<b>Part Number:</b>	105-2203-201
<b>Description:</b>	Horizontal Test Jack - Insulated: Formed Contact
<b>Product Family:</b>	TEST JACK
<b>Body Material:</b>	Nylon 6/6 per ASTM D4066
<b>Breakdown Voltage:</b>	3500 Vrms min.
<b>Color / Finish:</b>	Black
<b>Contact Material:</b>	Beryllium copper
<b>Contact Finish:</b>	Silver
<b>Contact Termination:</b>	Solder
<b>Current:</b>	5 amps
<b>Desc 2:</b>	Horizontal
<b>Description:</b>	Insulated Formed Contact
<b>For Use With:</b>	.080 (2.00) Tip Plug
<b>RoHS Compliant:</b>	Yes

20070523-1523

# Vertical Test Jack

## Insulated: Formed Contact

**SPECIFICATIONS:**

**Contact:** Beryllium copper per QQ-C-533

**Finish:** Gold or Silver

**Body:** Nylon 6/6 per ASTM D4066

**RATINGS**



**Current:** 5 amps

**Breakdown Voltage:** 3500 Vrms minimum†

**Contact Resistance:** Gold: 0.005 ohms maximum  
Silver: 0.010 ohms maximum

**Adjacent Jack C:** 1 pF maximum at 1 MHz

<b>SILVER PLATING</b>	
105-2203-201	Black

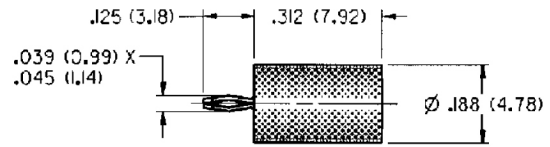

MOUNTING HOLE LAYOUT

**For Standard Tip Plug: .080 (2.00) Diameter**

**FEATURES:**

- Spring loaded lead to hold in board
- Contact protected from flux and solder
- Nylon UL approved for self extinguishing