

## International Series Control Transformers

Electromagnetic control components demand inrush currents up to 10 times the transformers nominal rating without sacrificing secondary voltage stability beyond practical limits. The International series transformers fully comply with IEC and NEMA standards and are available with IEC touchproof covers (IP20).

### Features

- Epoxy encapsulated for cooler operation
- Interleaved copper windings reduce I<sup>2</sup>R losses and maximize efficiency.
- 50/60 Hz
- 55°C Rise, 105°C insulation system for harsh, heavy duty applications
- Exceeds IEC, NEMA, ANSI, NMTBA, JIC and automotive standards

### Accessories

- IP20
  - Field installed Primary and Secondary IEC Touch Proof Cover Kit
- SBEDIN
  - Field installed IEC Fuse Holder Adaptor Kit

### Related Products

- DIN Rail Power Supplies
- 63 Series Power Conditioners
- Surge Suppression Devices provide additional protection and longevity to any electronic equipment.


### International Certifications

UL	CE
E77014 Vol. 1	IEC 61558-1 61558-2-2




Note: IP20 covers sold separately.

### Design Style

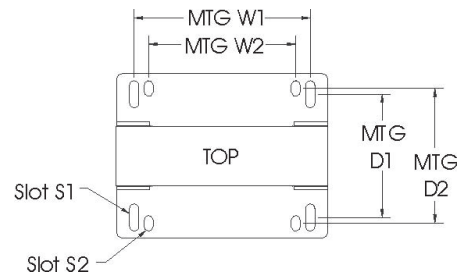

Mounting Dimensions

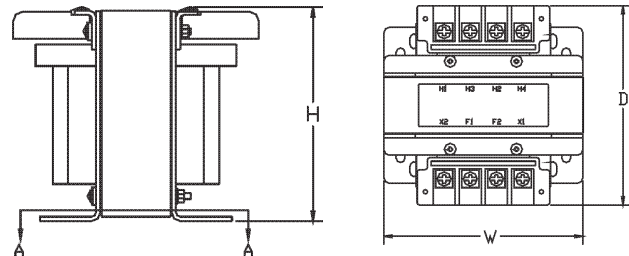

Profile

Top View

## Selection Tables: International Series

### Group 1 – 208/240/415 Volt Primary, 120/24 Secondary, 50/60 Hz 200/230/400 Volt Primary, 115/23 Secondary, 50/60 Hz



Continuous VA	Instantaneous VA*	Catalog Number	Height (inch)	Width (inch)	Depth (inch)	Mtg Width W1 / W2	Mtg Depth D1 / D2	Slot Size	Approx. Ship Weight (lbs)
50	105	E050TC	2.96	3.39	4.36	2.81/2.50	2.10/NA	.20 x .50 / .20 x .50	4
100	230	E100TC	3.89	4.5	4.48	2.56/2.87	2.87/3.18	.20 x .65 / .20 x .33	8
150	420	E150TC	3.89	4.5	5.21	3.74/3.12	3.29/3.61	.20 x .65 / .20 x .33	11
250	675	E250TC	4.53	5.25	5.53	4.38/3.75	3.54/NA	.31 x .71 / .31 x .71	15
500	1600	E500TC	5.56	6.38	6.93	5.32/4.37	4.25/5.75	.31 x .85 / .31 x .85	30

\* At 50% PF (Power Factor), 95% Nominal Secondary Voltage.

### Group 2 – 208/240/415 Volt Primary, 24 Volt Secondary, 50/60 Hz 277/480 Volt Primary, 24 Volt Secondary, 60 Hz 200/230/400 Volt Primary, 24 Volt Secondary, 50/60 Hz 220/380 Volt Primary, 23 Volt Secondary, 50/60 Hz



Continuous VA	Instantaneous VA*	Catalog Number	Height (inch)	Width (inch)	Depth (inch)	Mtg Width W1 / W2	Mtg Depth D1 / D2	Slot Size	Approx. Ship Weight (lbs)
50	105	E050TE	2.96	3.39	4.36	2.81 / 2.50	2.10 / NA	.20 x .50 / .20 x .50	4
100	230	E100TE	3.89	4.5	4.48	2.56 / 2.87	2.87 / 3.18	.20 x .65 / .20 x .33	8
150	420	E150TE	3.89	4.5	5.21	3.74 / 3.12	3.29 / 3.61	.20 x .65 / .20 x .33	11
250	675	E250TE	4.53	5.25	5.53	4.38 / 3.75	3.54 / NA	.31 x .71 / .31 x .71	15
500	1600	E500TE	5.56	6.38	6.93	5.32 / 4.37	4.25 / 5.75	.31 x .85 / .31 x .85	30

\* At 50% PF (Power Factor), 95% Nominal Secondary Voltage.

**Note:**

Fuse holders are not available for these voltage configurations.