

Product Catalog > Diodes > Ultra Fast Recovery Rectifiers >	
Part Number	UF4004
product family	ULTRA FAST RECOVERY RECTIFIERS
package type	DO-41
VRM(PRV)	400V
Ifsm	30A
IF(AV)	1.0A
@Vf	1.3V
@If	1.0A
Trr	50nS
IR	5.0μA
@VR	400V
Package Qty	Bulk: 1K/Box, 50K/Ctn ; Tape : 5K/Reel, 20K/Ctn; T/B: 5K/ Ammo Box, 50K/Ctn.
This product is listed under the following categories where you may find similar products: Diodes Ultra Fast Recovery Rectifiers	



Micro Commercial Components

UF4001 THRU UF4007

1 Amp Ultra Fast Recovery Rectifier 50 to 1000 Volts

Features

- Ultra Fast Switching Speed For High Efficiency
- Low Leakage
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL rating 1.
- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)

Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C
- Typical Thermal Resistance 25°C/W

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
UF4001	UF4001	50V	35V	50V
UF4002	UF4002	100V	70V	100V
UF4003	UF4003	200V	140V	200V
UF4004	UF4004	400V	280V	400V
UF4005	UF4005	600V	420V	400V
UF4006	UF4006	800V	560V	800V
UF4007	UF4007	1000V	700V	1000V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	1 A	$T_A = 55^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	30A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.0 V 1.3 V 1.7 V	$I_{FM} = 1.0\text{A};$ $T_A = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5 μA 100 μA	$T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$
Maximum Reverse Recovery Time	T_{rr}	50ns 75ns	$I_F=0.5\text{A}, I_R=1.0\text{A},$ $I_{rr}=0.25\text{A}$
Typical Junction Capacitance	C_J	20pF 10pF	Measured at 1.0MHz, $V_R=4.0\text{V}$

*Pulse Test: Pulse Width 300 sec, Duty Cycle 1%

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7.

DO-41

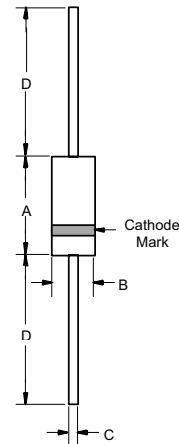

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.166	.205	4.10	5.20	
B	.080	.107	2.00	2.70	
C	.028	.034	.70	.90	
D	1.000	---	25.40	---	



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel; 5Kpcs/Reel
(Part Number)-AP	Ammo Packing;5Kpcs/AmmoBox
(Part Number)-BP	Bulk;1Kpcs/Box

IMPORTANT NOTICE

Micro Commercial Components Corp. reserve the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.