


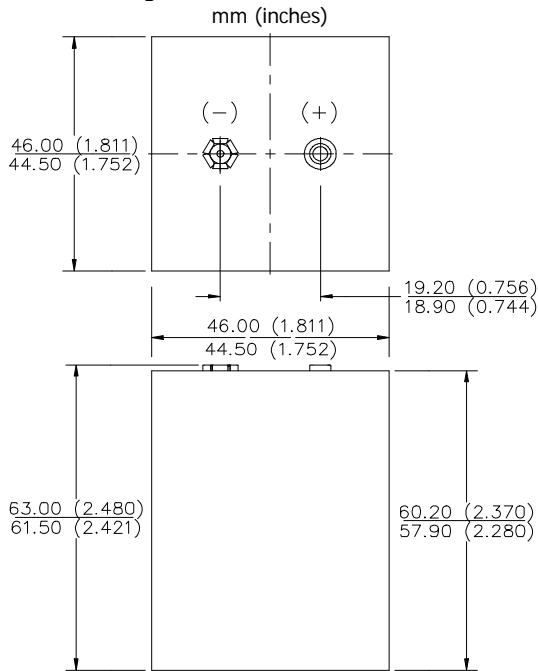
Current Batteries

Datasheet	Picture	Size	Voltage (nom.)	ANSI	IEC	Diam. (mm)	Weight (g)	Height (mm)	Length (mm)	Width (mm)
266		Multi Cell	9	1605	N/A	N/A	168	63	46	46

EVEREADY 266



Industry Standard Dimensions



Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: (Previously) ANSI / NEDA-1605

Battery Voltage: 9.0 Volts

Average Weight: 168 grams (5.9 oz.)

Volume: 126 cubic centimeters (7.7 cubic inch)


Average Capacity: 2500 mAh to 0.8 volts/cell
(Rated at 25 mA continuous drain at 21°C)

Cells: Twenty Four No. 117 - Four parallel strings of six in series.

Jacket: Paper

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

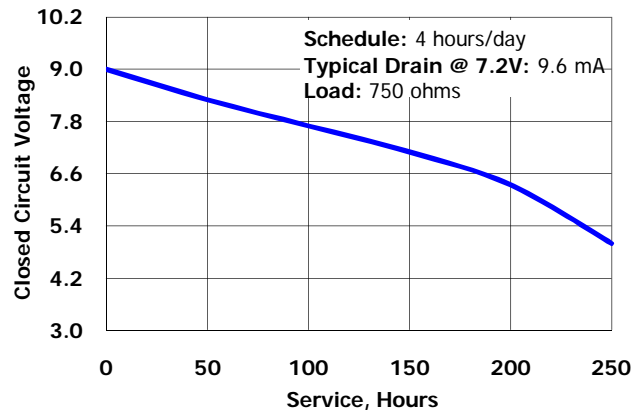

Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 7.2V (milliamperes)	Load (ohms)	Cutoff Voltage				
			4.2V	4.8V	5.4V	6.0V	6.6V 7.2V
4 hours/day	9.6	750	243	240	228	195	150

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved