

LM341/LM78MXX Series 3-Terminal Positive Voltage Regulators

General Description

The LM341 and LM78MXX series of three-terminal positive voltage regulators employ built-in current limiting, thermal shutdown, and safe-operating area protection which makes them virtually immune to damage from output overloads.


With adequate heatsinking, they can deliver in excess of 0.5A output current. Typical applications would include local (on-card) regulators which can eliminate the noise and degraded performance associated with single-point regulation.

Features

- Output current in excess of 0.5A
- No external components
- Internal thermal overload protection
- Internal short circuit current-limiting
- Output transistor safe-area compensation
- Available in TO-220, TO-39, and TO-252 D-PAK packages
- Output voltages of 5V, 12V, and 15V

Connection Diagrams

TO-39 Metal Can Package (H)

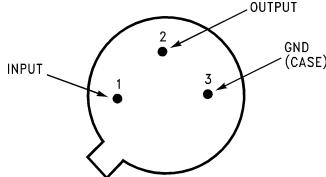


01048405

Bottom View

Order Number LM78M05CH, LM78M12CH or LM78M15CH

See NS Package Number H03A

TO-220 Power Package (T)




01048406

Top View

Order Number LM341T-5.0, LM341T-12, LM341T-15, LM78M05CT, LM78M12CT or LM78M15CT

See NS Package Number T03B

TO-252



01048419

Top View

Order Number LM78M05CDT

See NS Package Number TD03B

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Lead Temperature (Soldering, 10 seconds)	
TO-39 Package (H)	300°C
TO-220 Package (T)	260°C
Storage Temperature Range	-65°C to +150°C

Operating Junction Temperature

Range -40°C to +125°C

Power Dissipation (Note 2) Internally Limited

Input Voltage

5V ≤ V_O ≤ 15V 35V

ESD Susceptibility TBD

Electrical Characteristics

Limits in standard typeface are for T_J = 25°C, and limits in **boldface type** apply over the -40°C to +125°C operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods.

LM341-5.0, LM78M05C

Unless otherwise specified: V_{IN} = 10V, C_{IN} = 0.33 μF, C_O = 0.1 μF

Symbol	Parameter	Conditions		Min	Typ	Max	Units	
V _O	Output Voltage	I _L = 500 mA		4.8	5.0	5.2	V	
		5 mA ≤ I _L ≤ 500 mA		4.75	5.0	5.25		
		P _D ≤ 7.5W, 7.5V ≤ V _{IN} ≤ 20V						
V _{R LINE}	Line Regulation	7.2V ≤ V _{IN} ≤ 25V	I _L = 100 mA			50	mV	
			I _L = 500 mA			100		
V _{R LOAD}	Load Regulation	5 mA ≤ I _L ≤ 500 mA				100		
I _Q	Quiescent Current	I _L = 500 mA			4	10.0	mA	
ΔI _Q	Quiescent Current Change	5 mA ≤ I _L ≤ 500 mA				0.5		
		7.5V ≤ V _{IN} ≤ 25V, I _L = 500 mA				1.0		
V _n	Output Noise Voltage	f = 10 Hz to 100 kHz			40		μV	
ΔV _{IN} ΔV _O	Ripple Rejection	f = 120 Hz, I _L = 500 mA			78		dB	
V _{IN}	Input Voltage Required to Maintain Line Regulation	I _L = 500 mA		7.2			V	
ΔV _O	Long Term Stability	I _L = 500 mA				20	mV/khrs	

Electrical Characteristics

Limits in standard typeface are for $T_J = 25^\circ\text{C}$, and limits in **boldface type** apply over the -40°C to $+125^\circ\text{C}$ operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods. (Continued)

LM341-12, LM78M12C

Unless otherwise specified: $V_{IN} = 19\text{V}$, $C_{IN} = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$

Symbol	Parameter	Conditions		Min	Typ	Max	Units
V_O	Output Voltage	$I_L = 500 \text{ mA}$		11.5	12	12.5	V
		$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$ $P_D \leq 7.5\text{W}$, $14.8\text{V} \leq V_{IN} \leq 27\text{V}$		11.4	12	12.6	
V_{R_LINE}	Line Regulation	$14.5\text{V} \leq V_{IN} \leq 30\text{V}$	$I_L = 100 \text{ mA}$			120	mV
			$I_L = 500 \text{ mA}$			240	
V_{R_LOAD}	Load Regulation	$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$				240	
I_Q	Quiescent Current	$I_L = 500 \text{ mA}$			4	10.0	mA
ΔI_Q	Quiescent Current Change	$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$				0.5	
		$14.8\text{V} \leq V_{IN} \leq 30\text{V}$, $I_L = 500 \text{ mA}$				1.0	
V_n	Output Noise Voltage	$f = 10 \text{ Hz to } 100 \text{ kHz}$			75		μV
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	$f = 120 \text{ Hz}$, $I_L = 500 \text{ mA}$			71		dB
V_{IN}	Input Voltage Required to Maintain Line Regulation	$I_L = 500 \text{ mA}$		14.5			V
ΔV_O	Long Term Stability	$I_L = 500 \text{ mA}$				48	mV/khrs

LM341-15, LM78M15C

Unless otherwise specified: $V_{IN} = 23\text{V}$, $C_{IN} = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$

Symbol	Parameter	Conditions		Min	Typ	Max	Units
V_O	Output Voltage	$I_L = 500 \text{ mA}$		14.4	15	15.6	V
		$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$ $P_D \leq 7.5\text{W}$, $18\text{V} \leq V_{IN} \leq 30\text{V}$		14.25	15	15.75	
V_{R_LINE}	Line Regulation	$17.6\text{V} \leq V_{IN} \leq 30\text{V}$	$I_L = 100 \text{ mA}$			150	mV
			$I_L = 500 \text{ mA}$			300	
V_{R_LOAD}	Load Regulation	$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$				300	
I_Q	Quiescent Current	$I_L = 500 \text{ mA}$			4	10.0	mA
ΔI_Q	Quiescent Current Change	$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$				0.5	
		$18\text{V} \leq V_{IN} \leq 30\text{V}$, $I_L = 500 \text{ mA}$				1.0	
V_n	Output Noise Voltage	$f = 10 \text{ Hz to } 100 \text{ kHz}$			90		μV
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	$f = 120 \text{ Hz}$, $I_L = 500 \text{ mA}$			69		dB
V_{IN}	Input Voltage Required to Maintain Line Regulation	$I_L = 500 \text{ mA}$		17.6			V
ΔV_O	Long Term Stability	$I_L = 500 \text{ mA}$				60	mV/khrs

Note 1: Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its rated operating conditions.

Note 2: The typical thermal resistance of the three package types is:


T (TO-220) package: $\theta_{(JA)} = 60 \text{ }^\circ\text{C/W}$, $\theta_{(JC)} = 5 \text{ }^\circ\text{C/W}$

H (TO-39) package: $\theta_{(JA)} = 120 \text{ }^\circ\text{C/W}$, $\theta_{(JC)} = 18 \text{ }^\circ\text{C/W}$

DT (TO-252) package: $\theta_{(JA)} = 92 \text{ }^\circ\text{C/W}$, $\theta_{(JC)} = 10 \text{ }^\circ\text{C/W}$

Physical Dimensions

inches (millimeters) unless otherwise noted

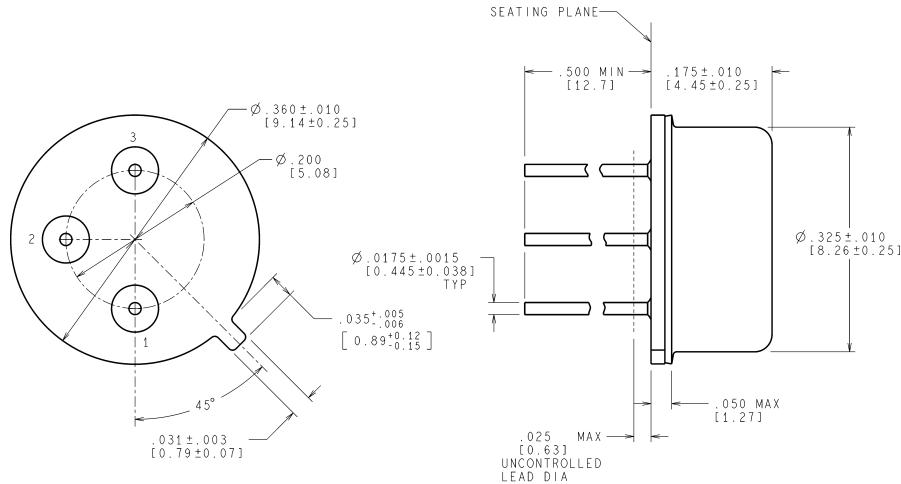


CONTROLLING DIMENSION IS INCH
VALUES IN [] ARE MILLIMETERS

MIL-PRF-38535
CONFIGURATION CONTROL

H03A (Rev D)

TO-39 Metal Can Package (H)
Order Number LM78M05CH, LM78M12CH or LM78M15CH
NS Package Number H03A

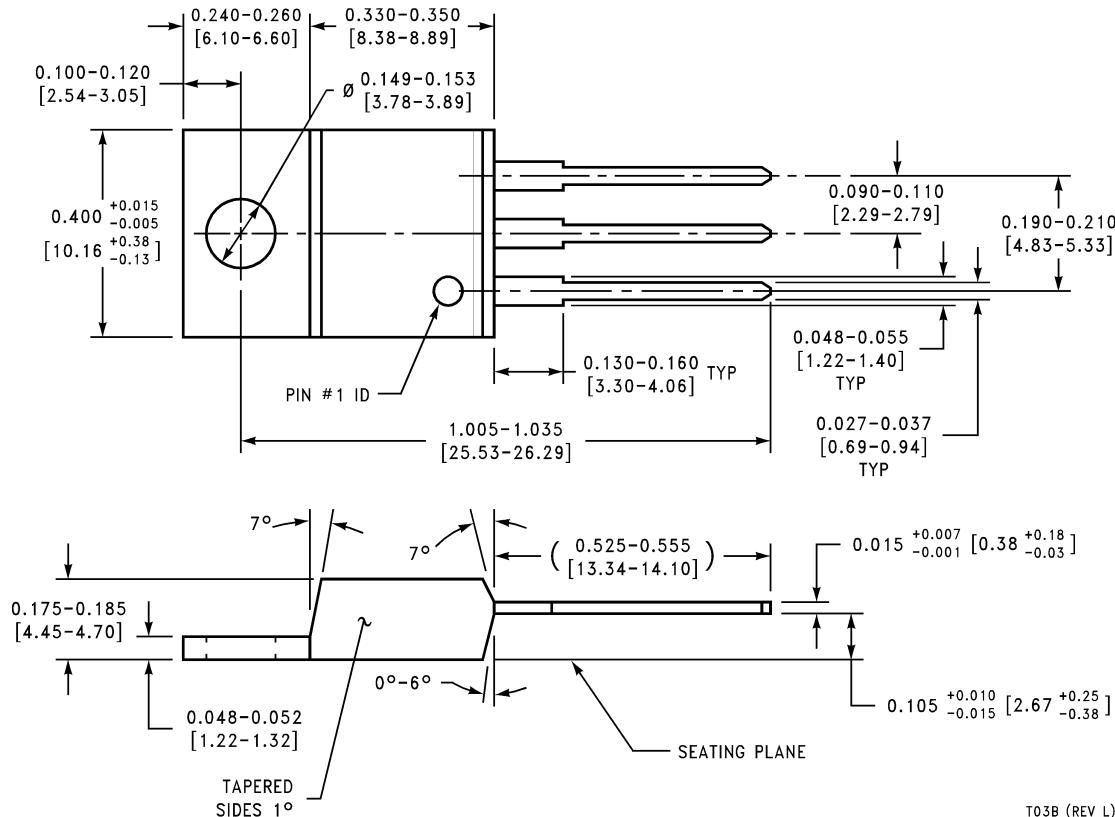

T03B (REV L)

TO-220 Power Package (T)
Order Number LM341T-5.0, LM341T-12, LM341T-15, LM78M05CT, LM78M12CT or LM78M15CT
NS Package Number T03B