

# Catamount®



**T&B Catalog Number:** L-14-120-9-C  
**UPC Number:** 72849491170  
**Description:** Cable Tie 120lb 14" Natural All-Nylon 100 Per Bag


**Status:** Active

<b>General</b>	
Material	Nylon 6.6
Color	Natural
<b>Dimension Information</b>	
Length (inches)	14.2
Width (inches)	0.300
Max. Wire Bundle Diameter (inches)	4
Min. Wire Bundle Diameter (inches)	3/16
<b>Specifications</b>	
Military Standard Part No.	MS-3367-3-9
Tensile Strength (lbs.)	120
Temperature Rating	-40°F to 185°F
Flammability Rating	UL 94 V-2
<b>Tooling</b>	
Application Tools	ERG120
<b>Packaging</b>	
T&B Order Multiple	100
T&B Inner Pack	100
Package in Units	3000
Package Type	Standard
T&B Sold in UOM	Each
T&B Weight Per UOM	13.67 lbs. per 1000
<b>Application Support</b>	
T&B Sales Drawings	wsd-000223
Overview	Available on Website
Material Selection Guide	Available on Website
Available Colors	Available on Website
<b>Certifications</b>	
RoHS Compliance	Yes
<b>Certifications</b>	





Catamount®

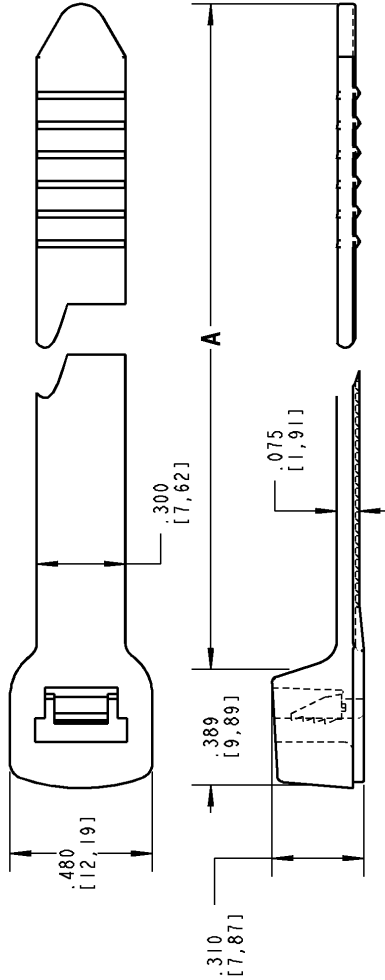

NOTES:

1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 120 LBS [534 N]
5. MINIMUM WIRE BUNDLE: .188 [4,76]
6. MAXIMUM WIRE BUNDLE: SEE TABLE
7. INSTALLATION TOOL/SETTING: WT19776-8 (MS90387-2) OR ERG297/5-8

CATALOG NUMBER	MAXIMUM WIRE BUNDLE	A
L-8-120-***	2.000 [50,8]	7.964 [202,29]
L-11-120-***	3.000 [76,2]	11.000 [279,4]
L-11-120FL-***	3.000 [76,2]	11.000 [279,4]
L-14-120-***	4.000 [101,6]	14.284 [362,81]
L-14-120FL-***	4.000 [101,6]	14.284 [362,81]
L-18-120-***	4.875 [123,83]	17.611 [447,32]
L-24-120-***	7.000 [177,8]	23.611 [599,72]
L-28-120-***	8.000 [203,2]	27.611 [701,32]

\* = COLOR CODE - 0= BLACK (OUTDOOR) 4= YELLOW 8= GRAY 17= FLUORESCENT YELLOW  
 1= BROWN 5= GREEN 9= NATURAL 18= FLUORESCENT GREEN  
 2= RED 6= BLUE 11= FLUORESCENT PINK 19= FLUORESCENT GREEN  
 3= ORANGE 7= PURPLE 16= FLUORESCENT ORANGE 20= FLUORESCENT BLUE

\*\* = PACKAGING- C= STD PKG (100) L= STD PKG (50) Ø= STD PKG (25)

CONSULT CUSTOMER SERVICE FOR PACKAGE QUANTITY AVAILABILITY

FLUORESCENT COLORS NOT "UR" OR "CE" RECOGNIZED OR LISTED

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY
2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.

REVISIONS

- (SEE ERN (\*\*\*\*) FOR APPROVAL SIGNATURES & RELEASE DATE.  
 PROJECT NO: \*\*\*\*

Thomas & Betts


DESCRIPTION: 8", 11", 14", 18", 24" & 28" SERIES 120 HEAVY DUTY CABLE TIES

ORIGINAL PROJECT NO / ( ERN NO ) SHEET NO: REV. NO: DRAWING NO:

FM40182 / ( 200827 ) 1 OF 1 - WSD-000223

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY, AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON. ©2003 Thomas & Betts - Proprietary. All Rights Reserved

# Ty-Fast® Cable Ties

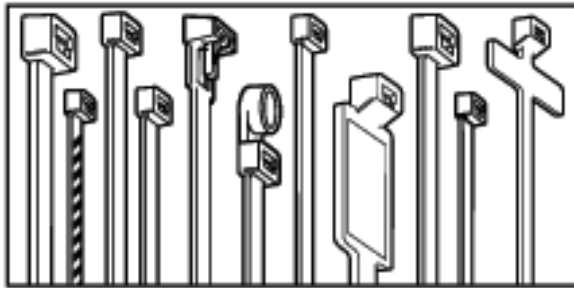

- MINIATURE
- HEAVY DUTY
- INTERMEDIATE
- EXTRA HEAVY DUTY
- STANDARD
- RELEASABLE TIES

- MOUNTING HEAD
- STRIPED TIES
- RESTRICTED BUNDLE
- IDENTIFICATION TIES
- MIL-SPEC TIES


Ty-Fast® Cable Ties are available in lengths from 4" to our exclusive 48" strap. Cable Ties will satisfy bundling requirements from 1/8" to 15" and loop tensile strengths from 18 to 175 pounds.

Cable Ties are stocked in materials and colors as listed. Contact your Ty-Fast® Distributor or Customer Service Representative for availability in special materials and colors.



Where applicable, Ty-Fast® Cable Ties are UL Recognized, Mil-Spec Approved and/or QPL Listed.

State-of-the-art robotic and raw material handling equipment assures product and material integrity throughout the manufacturing process. Overall quality is achieved through statistical analysis and quality driven operator objectives. Ty-Fast® has attained Mil-Spec I-45208 quality ratings from a number of equipment manufacturers.

Ty-Fast® products are sold through stocking T&B Distributors.

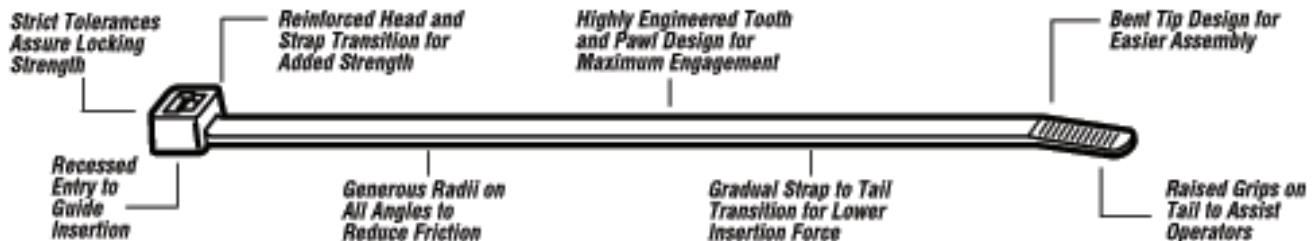

Ty-Rap®/Ty-Fast®

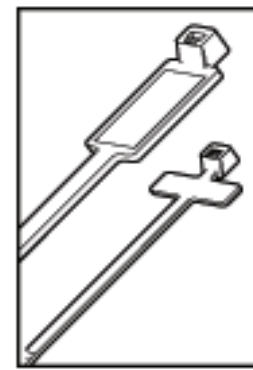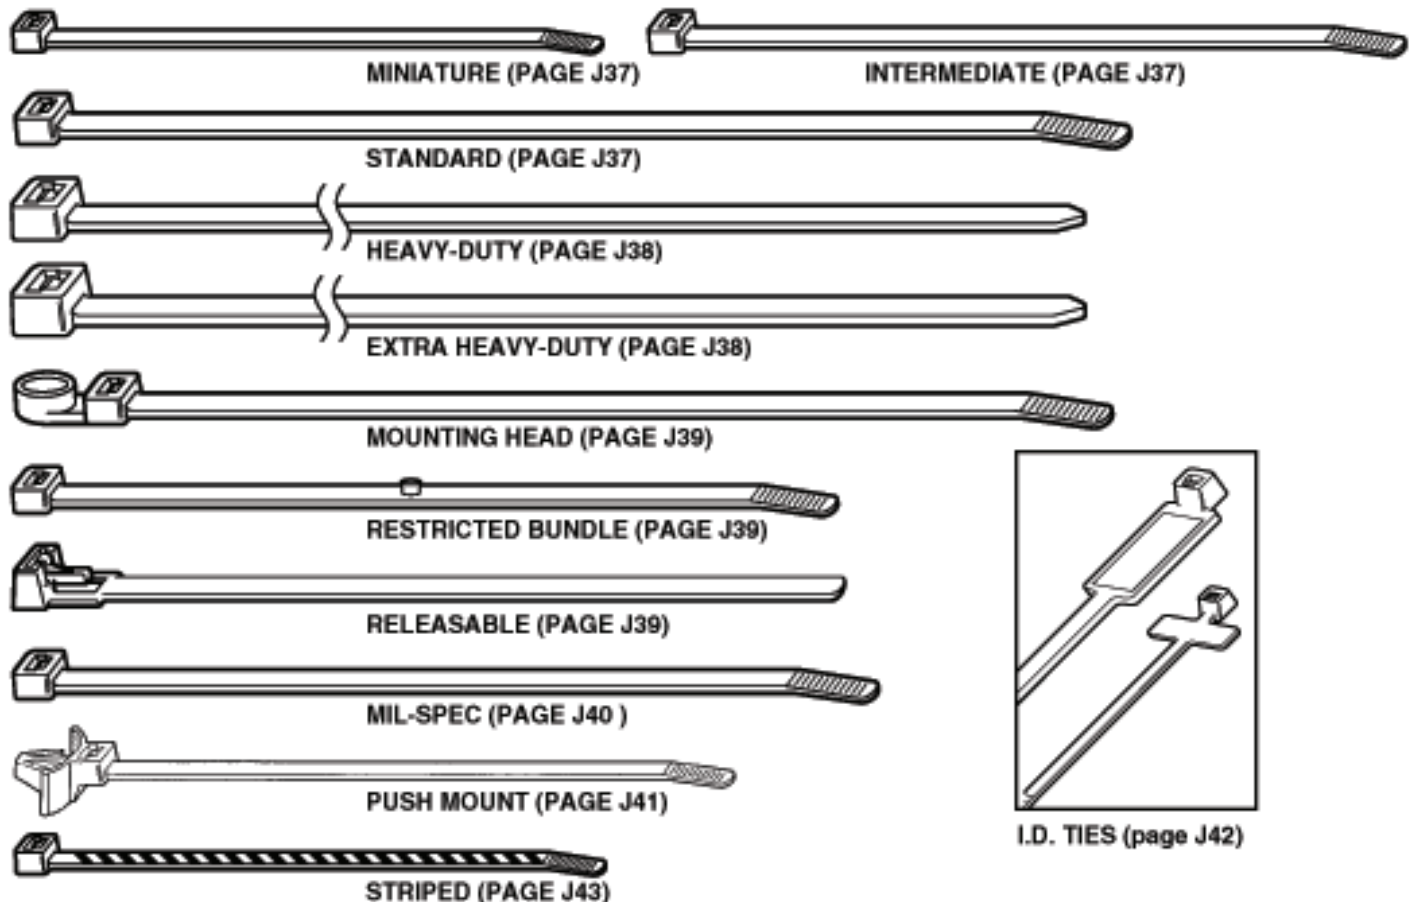

I.D. TIES (page J42)

**Thomas & Betts**

## Catamount® Cable Ties

Catamount® Ties and Terminals fit the needs of general-purpose fastening and wire terminations. Installers quickly discover that Catamount products offer durable and value-priced cable bundling for a variety of commercial and residential construction applications. Electricians can also take advantage of other benefits in stocking Catamount products in their toolboxes, such as more terminals per bag in most popular sizes than leading comparable brands.

Catamount Ties and Terminals are offered in a wide range of sizes, styles and colors and meet listing requirements for most electrical termination and fastening projects. A choice of matching tools are also offered to provide quick and reliable installations.

### Miniature — Series 18

CAT. NO.	LENGTH (IN.)	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-4-18-9-C	4.0	1/2	Natural	100
L-4-18-0-C	4.0	1/2	Black	100
L-6-18-9-C	6.4	1 1/2	Natural	100
L-6-18-0-C	6.4	1 1/2	Black	100
L-8-18-9-C	8.0	2	Natural	100
L-8-18-0-C	8.0	2	Black	100

Bulk packages available. Contact Customer Service.

Use GC-102, L-200, L-400-C or ERG-50 Installation Tools

### Intermediate — Series 30

CAT. NO.	LENGTH (IN.)	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-5-30-9-C	5.6	1 1/2	Natural	100
L-5-30-0-C	5.6	1 1/2	Black	100
L-8-40-9-C	8.5	2	Natural	100
L-8-40-0-C	8.5	2	Black	100
L-11-40-9-C	11.5	3	Natural	100
L-11-40-0-C	11.5	3	Black	100
L-14-40-9-C	14.5	4	Natural	100
L-14-40-0-C	14.5	4	Black	100

Bulk packages available. Contact Customer Service.

Use GC-102, L-200, L-400-C or ERG-50 Installation Tools

### Standard — Series 50

CAT. NO.	LENGTH (IN.)	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-5-50-9-C	5.5	1	Natural	100
L-5-50-0-C	5.5	1	Black	100
L-7-50-0-C	7.5	1 1/2	Natural	100
L-7-50-9-C	7.5	1 1/2	Black	100
L-11-50-9-C	11.1	3	Natural	100
L-11-50-0-C	11.1	3	Black	100
L-14-50-9-C	14.1	4	Natural	100
L-14-50-0-C	14.1	4	Black	100

Bulk packages available. Contact Customer Service.

Use GC-102, L-200, L-400-C or ERG-50 Installation Tools

### Heavy-Duty — Series 120

CAT. NO.	LENGTH (IN.)	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-8-120-9-C	8.0	2	Natural	100
L-8-120-0-C	8.0	2	Black	100
L-11-120-9-C	11.1	3	Natural	100
L-11-120-0-C	11.1	3	Black	100
L-14-120-9-C	14.2	4	Natural	100
L-14-120-0-C	14.2	4	Black	100
L-18-120-9-L	18.0	4 1/2	Natural	50
L-18-120-0-L	18.0	4 1/2	Black	50
L-24-120-9-L	24.2	7	Natural	50
L-24-120-0-L	24.2	7	Black	50
L-28-120-9-L	28.0	9	Natural	50
L-28-120-0-L	28.0	9	Black	50

Use L-300C or ERG-120 Installation Tool

### Extra Heavy-Duty — Series 175

CAT. NO.	LENGTH (IN.)	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-24-175-9-L	24.0	7.2	Natural	50
L-24-175-0-L	24.0	7.2	Black	50
L-34-175-9-L	34.0	10	Natural	50
L-36-175-9-L	36.0	10 1/2	Natural	50
L-36-175-0-L	36.0	10 1/2	Black	50
L-41-175-9-L	41.0	12	Natural	50
L-41-175-0-L	41.0	12	Black	50
L-48-175-9-L	48.0	15	Natural	50
L-48-175-0-L	48.0	15	Black	50

Use L-300C Installation Tool


### Identification Ties

CAT. NO.	LENGTH (IN.)	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-7-50ID-9-C	7.875	1 1/2	Natural	100
L-4-18ID-9-C	4.0	1/2	Natural	100

Bulk packages available. Contact Customer Service.

Use GC-102, L-200 or L-400-C Installation Tool

#### Sample Catalog Order:



4" Length, 18-lb. Tensile Strength, Natural Color, 100-Pack Quantity

#### Color Table

- |            |                            |
|------------|----------------------------|
| 0 - Black  | 9 - Natural (UV Resistant) |
| 1 - Brown  | 11 - Fluorescent Pink      |
| 2 - Red    | 16 - Fluorescent Orange    |
| 3 - Orange | 17 - Fluorescent Yellow    |
| 4 - Yellow | 18 - Fluorescent Green     |
| 5 - Green  | 20 - Fluorescent Blue      |
| 6 - Blue   |                            |
| 7 - Purple |                            |
| 8 - Gray   |                            |