
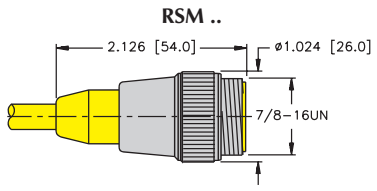



3 and 4-Wire *minifast*® Cordsets, Standard

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 300 V, 9 A



Housing Style	Part Number	Cable	Features	Pinout
	RSM 31-*M/S816	AWM PVC Yellow 3x20 AWG 105°C 5.2 mm OD Cable #RF50674-*M [†]	<i>flexlife</i>	1. BK 2. BN 3. BU 
	RSM 40-*M	AWM PVC Yellow 4x18 AWG 105°C 7.3 mm OD Cable #RF50548-*M [†]	<i>flexlife</i> ®	
	RSM 40-*M/S90	AWM PUR Yellow 4x18 AWG 105°C 7.3 mm OD Cable #RF50544-*M [†]	<i>Cut/Abrasion Immune</i>	
	RSM 40-*M/S101	AWM TPE Yellow 4x18 AWG 105°C 7.2 mm OD Cable #RF50968-*M [†]	<i>flexlife-10, High Flex - Over 10 million cycles</i>	
	RSM 40-*M/S529	PUR Yellow 4x20 AWG 105°C 5.7 mm OD Cable #RF50526-*M [†]	<i>Cut/Abrasion Immune, Braided Mechanical Shield</i>	
	RSM 40-*M/S600	SJOOW CPE Yellow 4x18 AWG 105°C 8.5 mm OD Cable #RF50644-*M [†]	<i>Weld Flash Immune, Flame Immune</i>	
	RSM 40-*M/S824	ITC PLTC PVC Yellow 4x18 AWG 105°C 7.2 mm OD Cable #RF50844-*M [†]	<i>flexlife</i>	

* Length in Meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths. Standard coupling nut material is nickel plated brass "RSM .."; "RS .." indicates nylon and "RSV .." indicates 316 stainless steel.

[†] See Section N for *reelfast*® cable information.

3 and 4-Wire *minifast*® Cordsets, Standard

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 300 V, 9 A




Housing Style	Part Number	Cable	Features	Pinout
	RKM 31-*M/S816	AWM PVC Yellow 3x20 AWG 105°C, 5.2 mm OD Cable #RF50674-*M [†]	<i>flexlife</i>	1. BK 2. BN 3. BU
	RKM 40-*M	AWM PVC Yellow 4x18 AWG 105°C 7.3 mm OD Cable #RF50548-*M [†]	<i>flexlife</i> ®	
	RKM 40-*M/S90	AWM PUR Yellow 4x18 AWG 105°C 7.3 mm OD Cable #RF50544-*M [†]	<i>Cut/Abrasion Immune</i>	
	RKM 40-*M/S101	AWM TPE Yellow 4x18 AWG 105°C 7.2 mm OD Cable #RF50968-*M [†]	<i>flexlife-10, High Flex - Over 10 million cycles</i>	1. BN 2. WH 3. BU 4. BK
	RKM 40-*M/S529	PUR Yellow 4x20 AWG 105°C 5.7 mm OD Cable #RF50526-*M [†]	<i>Cut/Abrasion Immune, Braided Mechanical Shield</i>	
	RKM 40-*M/S600	SJOOW CPE Yellow 4x18 AWG 105°C 8.5 mm OD Cable #RF50644-*M [†]	<i>Weld Flash Immune, Flame Immune</i>	
	RKM 40-*M/S824	ITC PLTC PVC Yellow 4x18 AWG 105°C 7.2 mm OD Cable #RF50844-*M [†]	<i>flexlife</i>	

* Length in Meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.
Standard coupling nut material is nickel plated brass "RKM .."; "RK .." indicates nylon and "RKV .." indicates 316 stainless steel.
[†] See Section N for *reelfast*® cable information.

minifast® Extension Cordset Part Number Key

Note:
Part Number Keys are to assist in IDENTIFICATION ONLY. Consult Factory for catalog items not identified.

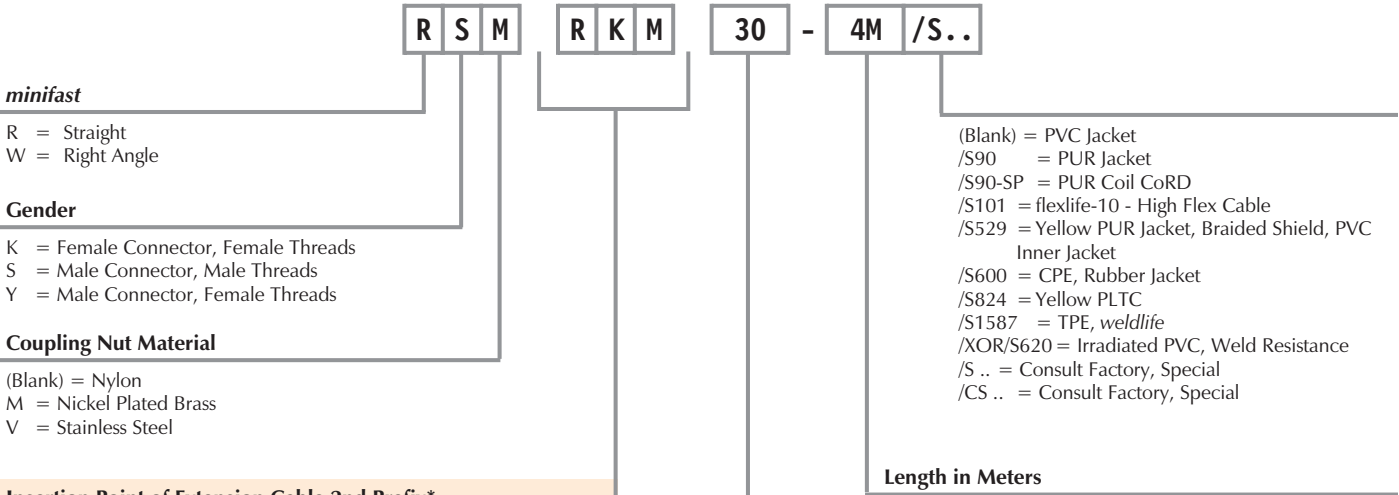

Insertion Point of Extension Cable 2nd Prefix*



* Male Connector Listed 1st, Female Connector 2nd
Example: RSM RKM 40-2M

Number of Wires / AWG / Conductor Colors


- 20 2/18 AWG BN, BU
 - 26 2/16 AWG BK, WH
 - 28 2/18 AWG BK, WH
 - 30 3/18 AWG BN, BU, GN/YE
 - 31 3/18 AWG BN, BU, BK
 - 35 3/16 AWG RD/BK, RD/WH, GN
 - 36 3/16 AWG BK, WH, GN
 - 38 3/18 AWG BK, WH, GN
 - 31 1 3/18 AWG RD/BK, RD/WH, GN
 - 40 4/18 AWG BN, BU, BK, WH
 - 46 4/16 AWG BK, WH, RD, GN
 - 47 4/16 AWG BN, WH, BU, BK
 - 48 4/18 AWG BK, WH, RD, GN
 - 50 5/18 AWG BN, BU, BK, WH, GN/YE
 - 55 5/16 AWG RD/BK, RD/WH, RD/BU, RD/OG, GN
 - 56 5/16 AWG BK, WH, RD, OG, GN
 - 58 5/18 AWG BK, WH, RD, OG, GN
 - 511 5/18 AWG RD/BK, RD/WH, RD/BU, RD/OG, GN
 - 61 6/18 AWG BN, BU, WH, Gy, YE, GN
 - 66 6/16 AWG BK, WH, RD, OG, BU, GN
 - 68 6/18 AWG BK, WH, RD, OG, BU, GN
 - 6B6 6/16 AWG OG, BU, BK, WH, RD, GN
 - 76 7/16 AWG WH/BK, WH, BK, RD, OG, BU, GN
 - 86 8/16 AWG OG, BU, WH/BK, BK, WH, RD, GN, RD/BK
 - 96 9/16 AWG OG, BU, RD/BK, GN/BK, WH, RD, GN, WH/BK, BK
 - 106 10/16 AWG OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, RD, GN, BK, WH
 - 126 12/16 AWG OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, BU/BK, BK/WH, GN, RD, WH, BK
- ___A Metal Clad Cable (8 straight only)
___D Smooth Plug Body (16 AWG straight only)

Note: Hybrid connector extensions also available. Consult factory.

Example:




Example:




minifast® Extension Cordset Part Number Key


Other Extension Examples:

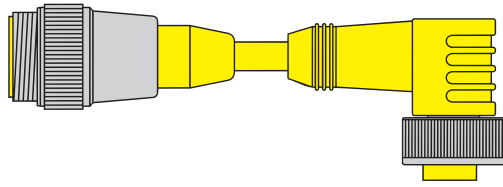

R S M W K M 30 - 4M /S..

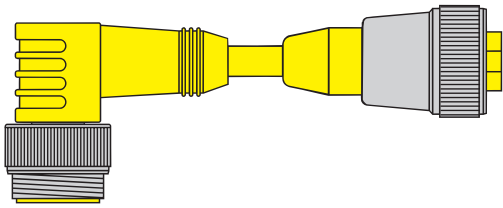

W S M R K M 30 - 4M /S..

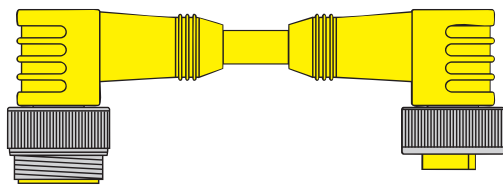

W S M W K M 30 - 4M /S..