



We Tame Photons to Work for You!



Products > LEDs > Surface Mount > Ceramic > 1210 Package

Features / Options

Applications / Uses









- ▶ State-of-the-Art, High Brightness Chip Technology
- ▶ Choice of Colors and Lens Finishes
- ▶ Lead Frame / Lens Casting Reliability
- ▶ Easy-to-Solder Leads, Tin Finish
- ▶ Available Bulk or on Tape and Reel
- ▶ Lead Trimming and Forming Available
- ▶ Custom Shapes, Easily Tooled, Low Minimum


- ▶ Board or Panel Indication or Illumination
- ▶ Annunciator and Control Panels
- ▶ Telecom Switches and Central Station Equipment
- ▶ Large Panel Indicators

Part Number:	Brightness	Dice Material	Emitted Color	Peak Wavelength	Epoxy Lens	Operating Typ Vf (V)	Intensity Typ, mcd @ 20 mA	View Angle 2x Theta		
CCL-CRS10SA		AlInGaP	Amber	605	Clear	2.2	60	180		—
CCL-CRS10SG		AlInGaP	Green	570	Clear	2.2	50	180		—
CCL-CRS10SR		GaAlAs	Red	660	Clear	1.8	30	180		—
CCL-CRS10SY		AlInGaP	Yellow	590	Clear	2.2	70	180		—
CCL-CRS10UPG		InGaN/SiC	Green	525	Clear	3.5	70	180		—
CCL-CRS10USB		InGaN/SiC	Blue	470	Clear	3.5	20	180		—

UNCONTROLLED DOCUMENT

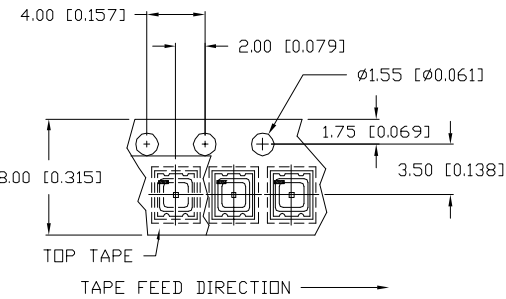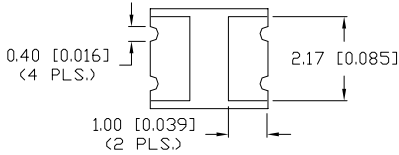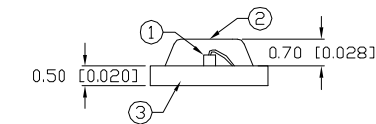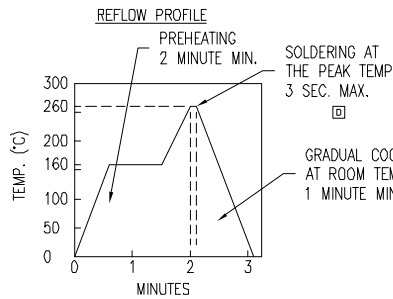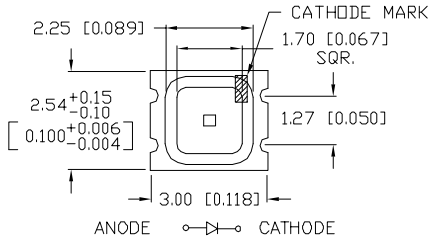

RECOMMENDED SOLDER PAD LAYOUT

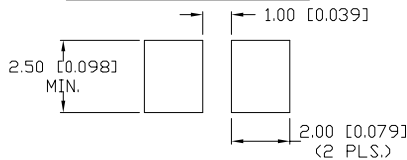

NOTES:

- PART SUPPLIED ON SUPER 8 TAPE AND REEL, 3,000 PIECES PER REEL.
- THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.
- WHITE CERAMIC CARRIER.

CAUTION: MOISTURE SENSITIVE DEVICE
PER JEDEC LEVEL 4 STANDARDS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

PART NUMBER
CCL-CRS10SR

REV.
F

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	REDRAWN.	4.27.00
B	CORRECTED DIMS.	3.20.95
C	E.C.N. #10390 & #10BRDR & REDRAWN.	10.2.98
D	E.C.N. #10484. ADDED SOLDER SPECS.	12.11.98
E	E.C.N. #10695. & REDRAWN IN 3D.	12.28.00
F	E.C.N. #10967.	3.14.03

ELECTRO-OPTICAL CHARACTERISTICS T _A =25°C I _f =20mA		MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH			660		nm	
FORWARD VOLTAGE		1.7		2.2	V _f	
REVERSE VOLTAGE	3.0				V _r	I _r =100µA
AXIAL INTENSITY			40		mcd	I _f =20mA
VIEWING ANGLE				180	2x theta	
EMITTED COLOR:	RED					
EPOXY LENS FINISH:	WATER CLEAR					

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	60	mA
STEADY CURRENT	15	mA
POWER DISSIPATION	45	mW
DERATE FROM 25°C	-.33	mW/°C
OPERATING TEMP.	-30 TO +75	°C
STORAGE TEMP.	-40 TO +85	°C

* I_t < 10µs

SOLDER HEAT PROOF TEST:	DIPPING FOR 5 SEC. AT 250°C, 2 TIMES.
THERMAL SHOCK TEST:	15 MIN. AT +90°C, AND 15 MIN. AT -30°C, 25 CYCLES.
VIBRATION TEST:	50Hz, FULL AMPLITUDE WIDTH; 1.5mm, 2 HOURS VERTICALLY AND HORIZONTALLY, RESPECTIVELY.
MOISTURE TEST:	T _a =60°C, Rh=90%, 1,000 HOURS.
IRON SOLDERING:	20W IRON (SHARP TIP), 280-320°C, 5 SEC. MAX.,
SOLDER DIP METHODE:	TEMP. IS 240-260°C AND TIME IS WITHIN 10 SEC.
RE-FLOW SOLDERING:	SEE CHART.

UNCONTROLLED DOCUMENT

REV.	PART NUMBER
F	CCL-CRS10SR

3.0mm x 2.5mm CERAMIC SURFACE MOUNT LED,
660nm SUPER RED LED, WATER CLEAR LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE:
CT			5.20.97
			PAGE: 1 OF 1
			SCALE: N/A