

Product Catalog > [Diodes](#) > [Switching Diodes](#) >

Part Number	BAS16
product family	SWITCHING DIODES
package type	SOT-23
VRM(PRV)	100V
Ifsm	1A
IF(AV)	300mA
@Vf	1.25V
@If	150mA
Trr	4.0nS
IR	1.0μA
@VR	75V
Package Qty	Tape : 3K/Reel , 120K/Ctn;

This product is listed under the following categories where you may find similar products:  
[Diodes](#)  
[Switching Diodes](#)



Micro Commercial Components

# BAS16

## 350mW 100Volt Switching Diode

### Features

- Low Current Leakage
- Low Cost
- Small Outline Surface Mount Package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking :A6

### Maximum Ratings



- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 357K/W Junction To Ambient

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	$V_R$	75V	
Peak Reverse Voltage	$V_{RM}$	100V	
Peak Forward Current	$I_F$	300mA	
Power Dissipation	$P_{TOT}$	350mW	
Peak Forward Surge Current	$I_{FSM}$	1A	$t=1s$ , None Repet.
Maximum Instantaneous Forward Voltage	$V_F$	1.25V	$I_{FM} = 150mA$ ; $T_J = 25^\circ C^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	1 $\mu A$ 50 $\mu A$	$V_R = 75Volts$ $T_J = 25^\circ C$ $T_J = 150^\circ C$
Typical Junction Capacitance	$C_J$	2pF	Measured at 1.0MHz, $V_R = 0V$
Reverse Recovery Time	$T_{rr}$	4ns	$I_F = 10mA$ $V_R = 6.0V$ $R_L = 100\Omega$


\*Pulse test: Pulse width 300  $\mu sec$ , Duty cycle 2%

### SOT-23

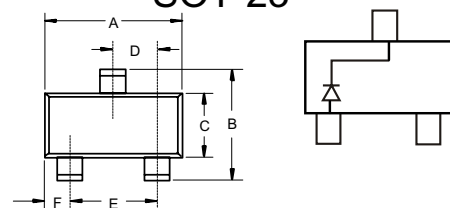

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

### Suggested Solder Pad Layout

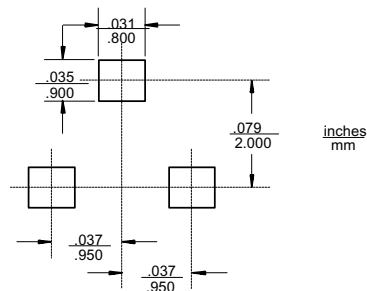



Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.