


	Electrical IEC Electronics	Consumer/Aftermarket	OEM Transportation	Terminal Blocks	Systems/S	ervices/Software
Cooper Bussmann Homepage About Cooper Bussmann Contact Us Privacy Legal Cooper Bussmann® Brand Site Map	Emitro Section Frast-A		ıse, 600V, 13/32 - 1-1/2 Inches			
	Product Inform	ation				
	Product Type:	Fuse				
	Product Family:	Electrical Power				
	Upgrade Product:	LP-CC-4	Ce	rtifications		
	Brand:	Cooper Bussmann	UL	Listed		
	Sub-brand:	Low-Peak	CS	A Certified		
	Recommended	Recommended Products		ties		
	Rec. Fuse Block: Rec. Inline Fuse	BM603 Series	Maximum AC Voltage:	600		
	Holder:	HEB Series	Amperage Rating:	4		
	Rec. Panel-moun Fuse Holder:	HPS Series	AC Interrupting Ratings:	• 1000	000 at 600V	
	Rec. Modular Fus Holder:	e <u>CHM Series</u>	Fast Acting:	Yes		
	Rec. Fuse Clips:	5960 Series				
	Rec. Cover:	SAMI-7 Series				
	Physical Proper	ties				
	Dimensions:	1.5in.(L) × 0.41in. (H)	W) × Oin.			


## **Bussmann**®

КТК

## LIMITRON<sup>®</sup> Fast-Acting Fuses 600 Volt, 1/10 - 30 Amps







Catalog Symbol: KTK Fast-Acting 1/10 TO 30A 600Vac (or less) Interrupting Rating: 100,000A RMS Sym. (UL) UL Listed, STD. 248-14, (Guide #JDYX, File #E19180) CSA Certified: C22.2 NO. 248.14 (File #53787—Class #1422-01) HRC-MISC


<b>Electrical Ratings (Catalog</b>	Symbol and Amperes)
------------------------------------	---------------------

600Vac - UL Listed and C.S.A.					
KTK-1/10	KTK-1	KTK-6	KTK-25		
KTK-1/8	KTK-1-1/4	KTK-7	KTK-30		
KTK-2/10	KTK-1-1/2	KTK-7-1/2	_		
KTK-1/4	KTK-2	KTK-8	_		
KTK-3/10	KTK-2-1/2	KTK-9	_		
KTK-4/10	KTK-3	KTK-10	_		
KTK-1/2	KTK-3-1/2	KTK-12	—		
KTK-6/10	KTK-4	KTK-15	_		
KTK-3/4	KTK-5	KTK-20	_		

## **Carton Quantity and Weight**


Ampere Ratings	Carton	We	ight*	
	Qty.	Lbs.	Kg.	
1-30	10	.180	.082	

\*Weight per carton.

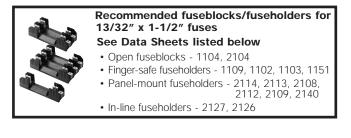

- LIMITRON® fast-acting fuse.
- Melamine tube.
- Nickel-plated bronze endcaps.

## **Time-Current Characteristic Curves-Average Melt**

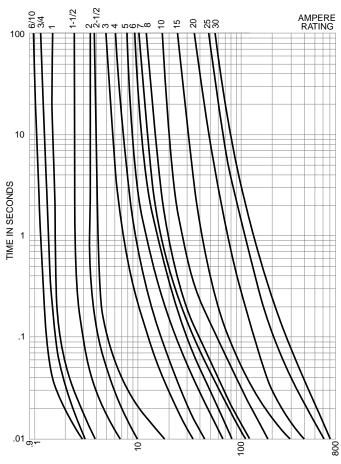

RMS SYMMETRICAL CURRENT IN AMPERES

C€

