



**BRT-23X14CM**

Description: Rectangular, acrylic target  
 Reflectivity Factor: 1.2  
 Temperature: -20° to +60° C  
 Other: This target has micro-prism geometry.

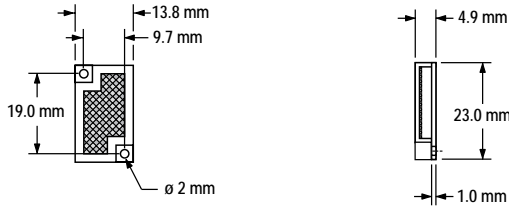


**BRT-30X20M**

Description: Rectangular, acrylic target  
 Reflectivity Factor: 1.2  
 Temperature: -20° to +60° C

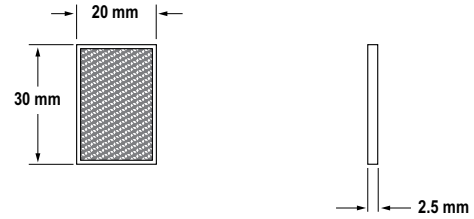


**BRT-30X20MT**

Description: Rectangular, acrylic target includes mounting tape  
 Reflectivity Factor: 1.2  
 Temperature: -20° to 60° C

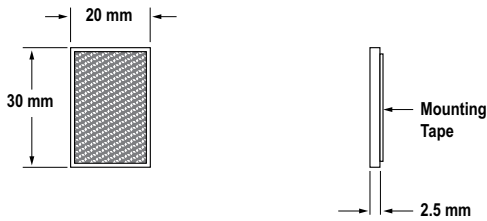


**BRT-32X20AM**

Description: Rectangular, thin profile acrylic target  
 Reflectivity Factor: 1.2  
 Temperature: -20° to +60° C  
 Other: This target has micro-prism geometry.

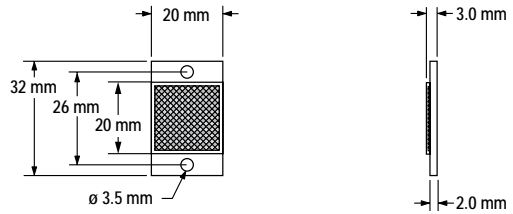


**BRT-32X22A**

Description: Rectangular, acrylic target  
 Reflectivity Factor: 1.3  
 Max. Temperature: 65° C

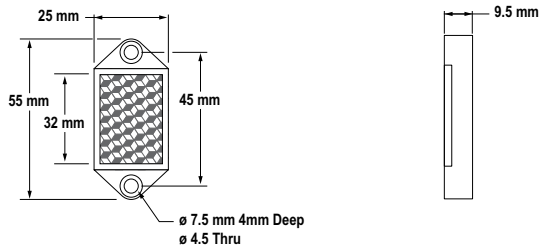

**BRT-35X20A  
 BRT-35X20AB**

Description: Rectangular, acrylic target\*  
 Reflectivity Factor: 1.4  
 Temperature: -20° to +60° C

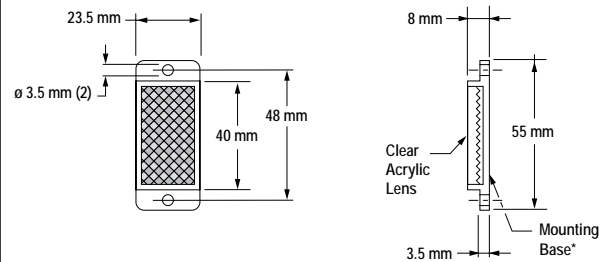

\*Mounting base available in white (BRT-35X20A) or black (BRT-35X20AB).

More on next page