




## Model #: SMART1500

### SmartPro Tower UPS System - Intelligent, line interactive network power management system

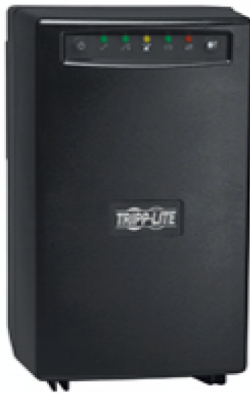

#### Highlights

- 1500VA / 1.5kVA line interactive tower UPS
- Maintains 120V nominal output over an input range of 75 to 147V
- Network communications supported via USB port, serial port
- Input: NEMA 5-15P (120V 15A) / Output: 6 NEMA 5-15R (120V)
- 2 year product warranty

#### Description

Tripp Lite's SMART1500 intelligent, line interactive UPS system protects servers, networking accessories and telecommunications equipment from blackouts, voltage fluctuations and transient surges. Large internal batteries offer 20 minutes half load runtime and 7 minutes at full load during power failures. 1500VA/980 watt power handling capability supports a variety of networking, telecom and various other application types, including the support of multiple network workstations. Includes a total of 6 outlets, 1 of which can be individually powered on and off via software interface to selectively reboot remote equipment or to automatically shed less significant loads to extend battery runtime for more critical equipment. Supports remote monitoring of UPS and site power conditions via built-in USB and DB9 monitoring ports. Includes PowerAlert UPS monitoring and unattended shutdown software with complete cabling. Supports SNMP with optional SNMPWEBSOLO external adapter. Built-in audible alarm and 5 front panel LEDs indicate status of line power, battery power, battery low/replace, voltage regulation and load level. Wall mountable with optional UPSWM wallmount bracket. Network-grade AC surge suppression protects equipment from damage and performance problems resulting from transient surges. Attractive, small-footprint tower housing uses less than 66 square inches of floor or desktop space.

#### Applications

Ideal for the protection of file servers, network accessories and telecommunications equipment. Common applications include any mix of servers, workstations, hubs, routers, concentrators, IP telephony and traditional PBX switching systems. Ideal for sensitive electronic applications in areas where brownouts and overvoltages are common.

#### Package Includes

- SMART1500 UPS System
- USB and DB9 monitoring cables
- PowerAlert unattended shutdown and UPS/Power monitoring software
- Instruction manual with warranty information

#### Features

- 1500VA/980 watt power handling capability supports a variety of networking, telecom and various other application types
- Built-in voltage regulation and battery support, plus complete AC suppression prevents equipment damage, data loss and downtime
- Large internal batteries offer 20 minutes half load runtime and 7 minutes at full load during power failures
- Automatic Voltage Regulation (AVR) circuits with two boost and one voltage reduction level maintains usable 120V nominal output over an input voltage range of 75-147V

Includes a total of 6 NEMA5-15R outlets, 1 of which can be individually powered on and off via software interface to selectively reboot remote equipment or shed less significant loads to extend battery runtime for more critical equipment

Includes 1 USB and 1 DB9 monitoring port for remote monitoring of UPS status and site power conditions

Communications ports enable safe unattended shutdown without data loss during extended power failures

Communications ports support messaging of UPS and line power status, including on-battery, low-battery, power-restored, AC line voltage, DC battery voltage and battery capacity

Communications ports support timed inverter shutoff after unattended shutdown, activate self-test and 10 second reboot of connected equipment

PowerAlert UPS monitoring and unattended shutdown software with complete cabling included

Supports Tripp Lite's WatchDog software application to restore unresponsive programs by automatically restarting them and rebooting completely locked computers by automatically switching UPS power off and back on again

Notification of system status via 5 LEDs and multi-function audible alarms

Wall mountable with UPSWM wallmount bracket

Attractive small footprint beige tower housing uses less than 66 square inches

Hot-swappable/user replaceable batteries allow on-site battery replacement

Cold start capability enables UPS turn-on in battery mode during blackout conditions

UL (USA), cUL (Canada), NOM (Mexico), Class A (Emissions)

2 year manufacturers product warranty

## Specifications

SYSTEM OVERVIEW	
Voltage compatibility	120V AC
Frequency compatibility	60 Hz
OUTPUT	
Output VA	1500
Output watts	980
Output nominal voltage	120V AC
Output voltage regulation	LINE MODE: Sine wave line voltage 120V (-18% / +8%) BATTERY MODE: PWM sine wave output 115V +/-5%
Output frequency regulation	LINE MODE: Passes line frequency of 60Hz +/-10% BATTERY MODE: Inverter output regulated to 60Hz +/-0.5Hz
Outlet quantity / type	6 NEMA 5-15R
Customized load management receptacles	"Individually controllable outlet supports load shedding and remote reboot on demand of locked network devices. Controllable via PowerAlert software to switch off optional loads, like monitors, to increase available runtime for servers and other critical devices."
Overload protection	Circuit breaker
INPUT	
Maximum input amps	12A / 1070 watts
Input connection type	NEMA 5-15P
Input cord length	6 ft., 14 gauge
Recommended Electrical Service	15A 120V
BATTERY	
Full load runtime	7 minutes (1500VA)
Half load runtime	20 minutes (750VA)

<b>DC system voltage</b>	36 V DC
<b>Typical battery lifespan</b>	3-6 years, depending on usage
<b>Battery recharge rate</b>	2-4 hours to 90%
<b>Replacement Battery Cartridge</b>	RBC53
<b>VOLTAGE REGULATION</b>	
<b>Voltage regulation description</b>	Automatic Voltage Regulation (AVR) circuits maintain clean, regulated computer-grade 120V nominal output, without using battery power, during brownouts to 75V and overvoltages to 147V
<b>Overvoltage correction</b>	Input voltages between 128 and 147V AC are reduced by 12%
<b>Direct pass through</b>	Input voltages between 108 and 127V AC are passed on to connected equipment unchanged
<b>Brownout correction</b>	Input voltages between 93 and 107V AC are boosted by 14%
<b>Severe brownout correction</b>	Input voltages between 75 and 92V AC are boosted by 30%
<b>LEDS ALARMS &amp; SWITCHES</b>	
<b>Front panel LEDs</b>	Includes 5 front panel LEDs to indicate BATTERY CHARGE LEVEL, AC LINE POWER STATUS, VOLTAGE REGULATION STATUS, UPS LOAD LEVEL and BATTERY LOW / REPLACE information
<b>Alarms</b>	Audible alarm indicates power failure conditions (4 short beeps every 10 seconds), overload (continuous short beeps) and low battery (continuous tone)
<b>Switches</b>	Yes, includes 2 front panel mounted push-button switches for system enable, self-test and alarm cancel functions
<b>SURGE / NOISE SUPPRESSION</b>	
<b>AC surge suppression</b>	480 joules
<b>AC suppression response time</b>	Instantaneous
<b>EMI / RFI AC noise suppression</b>	Yes
<b>PHYSICAL</b>	
<b>Shipping weight (lbs)</b>	42.6
<b>Shipping weight (kg)</b>	19.4
<b>Unit weight (lbs)</b>	38.4
<b>Unit weight (kg)</b>	17.5
<b>Unit Dimensions (HWD/in)</b>	12.75 x 7.5 x 9
<b>Unit Dimensions (HWD/cm)</b>	32.4 x 19.1 x 22.9
<b>Material of construction</b>	PVC
<b>Form factors supported</b>	Tower
<b>Cooling method</b>	Built-in rear exit cooling fan
<b>Battery Access</b>	Battery access door allows hot swap battery replacement without powering connected equipment off
<b>ENVIRONMENTAL</b>	

<b>Operating Temperature</b>	+32 to +104 degrees Fahrenheit
<b>Storage Temperature</b>	+5 to +122 degrees Fahrenheit
<b>Relative Humidity</b>	0 to 95%, non-condensing
<b>COMMUNICATIONS</b>	
<b>Network monitoring port</b>	Includes 2 built-in monitoring ports, 1-USB & 1-DB9. Each supports on battery, low battery, power restored, AC line voltage, DC battery voltage, load percentage, battery charge current, battery capacity, internal UPS temperature, line frequency status messaging. Interface supports timed inverter shutoff after unattended shutdown, activate self-test and 10 second reboot of connected equipment. Supports individual reboot of selected items connected to load management receptacles and load shedding to increase battery runtime for the most critical loads. Compatible with Tripp Lite's PowerAlert and Watchdog service software.
<b>Software and cabling included</b>	Includes PowerAlert UPS monitoring software for all common network and standalone operating systems. Ships with 2 cables, 1-USB to USB & 1-DB9 to DB9
<b>SNMP compatibility</b>	Yes via external SNMP adapter accessory #SNMPWEBSOLO
<b>WatchDog compatibility</b>	Yes, compatible with Tripp Lite's Watchdog system service to restore operation to locked equipment through soft reboot of application / OS or hard power off/on reboot of connected equipment - ideal for unattended kiosk applications
<b>LINE / BATTERY TRANSFER</b>	
<b>Transfer time from line power to battery mode</b>	2-4 milliseconds
<b>Low voltage transfer to battery power</b>	Switches to battery power as line voltage decreases to 75 volts or less. Resets back to line power mode as line voltage increases to 79V or higher.
<b>High voltage transfer to battery power</b>	Switches to battery power as line voltage increases to 147 volts or higher. Resets back to line power mode as line voltage decreases to 143V or less.
<b>SPECIAL FEATURES</b>	
<b>Cold Start</b>	Yes, inverter can be "cold started" to enable temporary AC output during a power failure
<b>Appearance</b>	Attractive gray tower UPS
<b>CERTIFICATIONS</b>	
<b>Certifications</b>	Tested to UL1778 (USA), cUL (Canada), Class A (emissions), NOM (Mexico)
<b>WARRANTY</b>	
<b>Product warranty</b>	2 year product warranty
<b>Optional coverage</b>	3-5 year warranties, plus next day and on-site warranty coverage available for select opportunities. Contact Tripp Lite for additional information

## Related Items

<b>Extended Warranties</b>		
WEXT3-500-1500	3-Year Extended Warranty - For Smart Line-Interactive and Online Tower or Rack models, 1500VA or less	Qty: [optional]
WEXT5-500-1500	5-Year Extended Warranty - For Smart Line-Interactive and Online Tower or Rack models, 1500VA or less	Qty: [optional]
<b>Power Distribution</b>		
PDU1215	Basic PDU / Power Distribution Unit - Safe, reliable power distribution for critical networking equipment	Qty: [optional]
<b>Surge Protectors</b>		

DTEL2	Network Surge Suppressor - Essential protection for data and communication lines	Qty: [optional]
DNET1	Network Surge Suppressor - Essential protection for data and communication lines	Qty: [optional]
DCATV	Network Surge Suppressor - Essential protection for TV/VCR coaxial lines	Qty: [optional]

**USB Hubs/Accessories**

U022-010	USB Cable - 10-ft. USB 2.0 AB Gold Device Cable	Qty: [optional]
----------	---	-----------------

**Wallmount Bracket**

UPSWM	Wallmount Bracket and installation accessories (4 washers, 4 screws, 1 Velcro safety strap)	Qty: [optional]
-------	---	-----------------

©2009 Tripp Lite. All Rights Reserved.