

**Cooper Bussmann**

- Homepage
- About Cooper Bussmann
- Contact Us
- Privacy
- Legal
- Cooper Bussmann® Brand
- Site Map



**LPJ-200SP**  
Class J, Dual-Element, Time Delay

Product Information	
Product Type:	Fuse
Product Family:	Electrical Power
Brand:	Cooper Bussmann
Sub-brand:	Low-Peak
Class:	J

Recommended Products	
Rec. Fuse Block:	<a href="#">J60200 Series</a>
Rec. Disconnect Switch:	<a href="#">FD200J Series</a>

Physical Properties	
Dimensions:	5.75in.(L) × 1.63in.(W) × 0in.(H)

Certifications
<a href="#">UL Listed</a>
<a href="#">CSA Certified</a>

Electrical Properties	
Maximum AC Voltage:	600
Maximum DC Voltage:	300
Amperage Rating:	200
AC Interrupting Ratings:	<ul style="list-style-type: none"> <li>• 300000 at 600V</li> </ul>
DC Interrupting Ratings:	<ul style="list-style-type: none"> <li>• 100000 at 300V</li> </ul>
Fuse Class:	Class J
Time Delay:	Yes

# LOW-PEAK®

Dual-Element, Time-Delay Fuses  
Class J – 600 Volt

LPJ  
70 to 600A



Catalog Symbol: LPJ-\_SP  
Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current  
Current-Limiting  
Ampere Rating: 70 to 600A  
Voltage Rating: 600Vac (or less)\*  
Interrupting Rating: 300,000A RMS Sym.  
Agency Information:  
UL Listed – Special Purpose†, Guide JFHR, File E56412  
CSA Certified, Class J per CSA C22.2 No. 248.8, Class 1422-02, File 53787

\*0-600A rated 300Vdc and 20 KAIC.  
†Meets all performance requirements of UL Standard 248-8 for Class J fuses.

### Catalog Symbol and Ampere Ratings

LPJ-70SP	LPJ-125SP	LPJ-250SP	LPJ-500SP
LPJ-80SP	LPJ-150SP	LPJ-300SP	LPJ-600SP
LPJ-90SP	LPJ-175SP	LPJ-350SP	—
LPJ-100SP	LPJ-200SP	LPJ-400SP	—
LPJ-110SP	LPJ-225SP	LPJ-450SP	—


### Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
70-100	5	1.69	0.767
110-200	5	4.21	1.910
225-400	1	1.67	0.758
450-600	1	2.80	1.270


\*Weight per carton.




### Dimensional Data

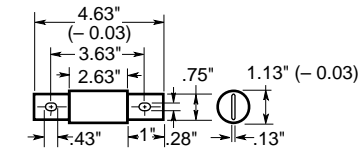


70A to 100A

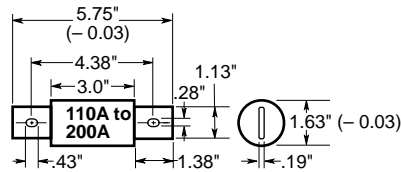

110A to 200A

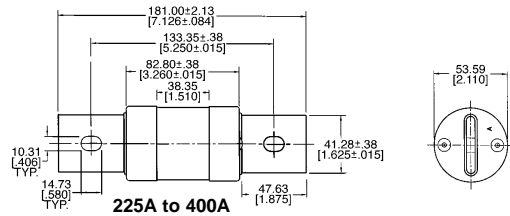

225A to 400A

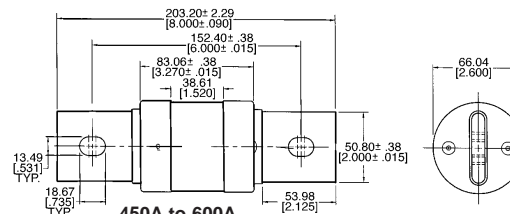

450A to 600A

### General Information:

- True dual-element fuses with a minimum 10 second time-delay at 500% overload.
- Long time-delay minimizes needless fuse openings due to temporary overloads and transient surges.
- Can often be sized for back-up protection against motor burnout from overload or single-phasing if other overload protective devices fail.
- High interrupting rating to safely interrupt overcurrents up to 300,000A.
- High degree of current-limitation due to the fast speed-of-response to short-circuits.
- Faster response to damaging short-circuit currents than mechanical overcurrent protective devices.
- Reduces let-through thermal and magnetic forces in order to protect low withstand rated components.
- Proper sizing provides "no damage" Type "2" coordinated protection for NEMA and IEC motor control in accordance with IEC Standard 947-4-1.
- Dual-element fuses have lower resistance than ordinary fuses, hence they run cooler.
- Lower watts loss reduces power consumption.
- Unique dimensions assure that another class of fuse with a lesser voltage rating, interrupting rating or current-limiting ability cannot be substituted.
- Space-saving package for equipment down sizing.