

## POWER SCHOTTKY RECTIFIER

### MAIN PRODUCT CHARACTERISTICS


$I_{F(AV)}$	<b>3 A</b>
$V_{RRM}$	<b>60 V</b>
$T_j$ (max)	<b>150°C</b>
$V_F$ (max)	<b>0.65 V</b>

### FEATURES AND BENEFITS

- NEGLIGIBLE SWITCHING LOSSES
- LOW THERMAL RESISTANCE
- AVALANCHE CAPABILITY SPECIFIED

### DESCRIPTION

Schottky rectifier suited for Switched Mode Power Supplies and high frequency DC to DC converters. Packaged in SMC, this device is intended for use in DC/DC chargers.



**SMC**  
**(JEDEC DO-214AB)**

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		60	V
$I_{F(RMS)}$	RMS forward current		10	A
$I_{F(AV)}$	Average forward current	$T_c = 100^\circ\text{C} \quad \delta = 0.5$	3	A
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10 \text{ ms}$ Sinusoidal	75	A
$I_{RRM}$	Repetitive peak reverse current	$t_p = 2 \mu\text{s}$ square $F=1\text{kHz}$	1	A
$P_{ARM}$	Repetitive peak avalanche power	$t_p = 1 \mu\text{s} \quad T_j = 25^\circ\text{C}$	1600	W
$T_{stg}$	Storage temperature range		- 65 to + 175	°C
$T_j$	Maximum operating junction temperature *		150	°C
$dV/dt$	Critical rate of rise of reverse voltage		10000	V/ $\mu\text{s}$

\* :  $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

## STPS3L60S

### THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction to leads	20	$^{\circ}\text{C}/\text{W}$

### STATIC ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
$I_R^*$	Reverse leakage current	$T_j = 25^{\circ}\text{C}$	$V_R = V_{RRM}$			55	$\mu\text{A}$
		$T_j = 125^{\circ}\text{C}$			10	15	$\text{mA}$
$V_F^*$	Forward voltage drop	$T_j = 25^{\circ}\text{C}$	$I_F = 3\text{ A}$			0.7	$\text{V}$
		$T_j = 125^{\circ}\text{C}$	$I_F = 3\text{ A}$		0.56	0.65	
		$T_j = 25^{\circ}\text{C}$	$I_F = 6\text{ A}$			0.94	
		$T_j = 125^{\circ}\text{C}$	$I_F = 6\text{ A}$		0.67	0.76	

Pulse test : \*  $t_p = 380\ \mu\text{s}$ ,  $\delta < 2\%$


To evaluate the conduction losses use the following equation :

$$P = 0.54 \times I_{F(AV)} + 0.037 I_{F(RMS)}^2$$


**Fig. 1:** Average forward power dissipation versus average forward current.

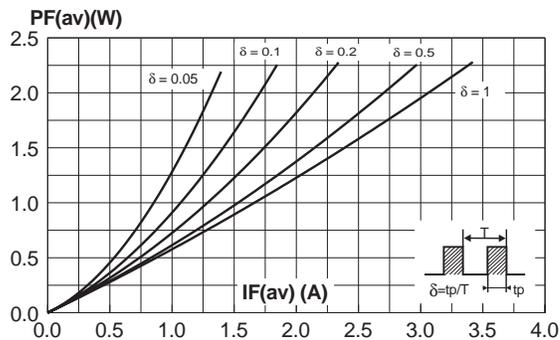


**Fig. 2:** Average forward current versus ambient temperature (delta = 0.5).

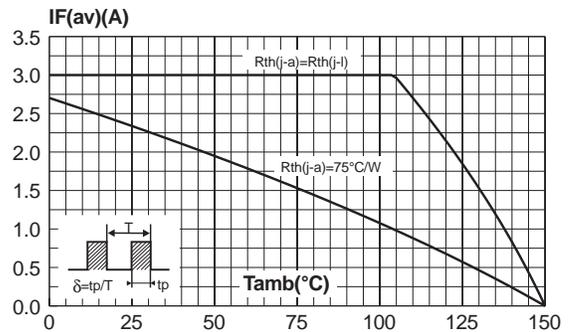

**PACKAGE MECHANICAL DATA**  
SMC

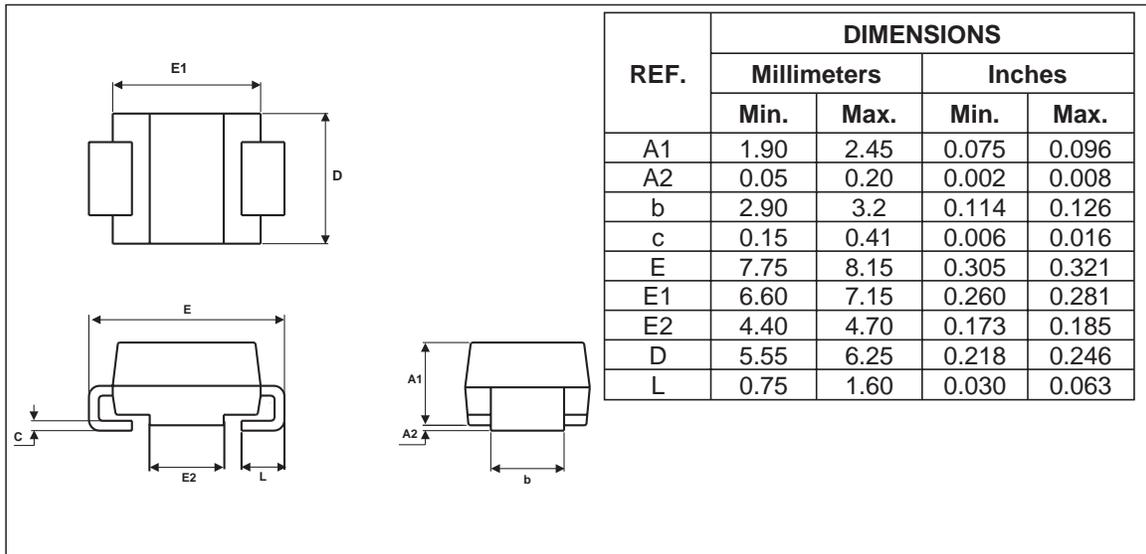

**FOOT PRINT ( in millimeters)**

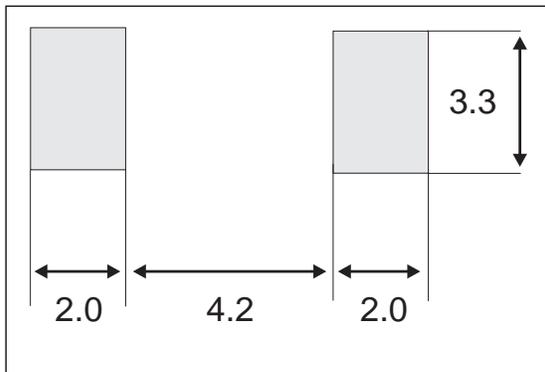

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS3L60S	S36	SMC	0.24g	2500	Tape and reel

- EPOXY MEETS UL94,V0