


OPT-60DC/ 48DC/100

Order No.: 2966621

The illustration shows the version OPT-24DC/48DC/100

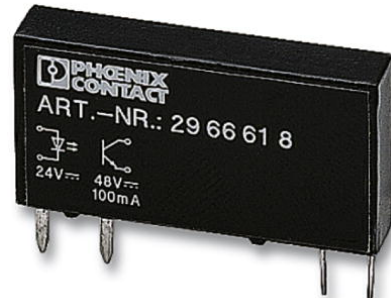

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2966621>

Pluggable miniature optocouplers, input optocouplers, input: 60 V DC, output: 3 - 48 V DC/ 100 mA

Commercial data	
EAN	4017918130473
Pack	10 pcs.
Customs tariff	85364190
Weight/Piece	0.00522 KG
Catalog page information	Page 78 (IF-2007)

Product notes

WEEE/RoHS-compliant since:
08/28/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Input data	
Nominal input voltage U_N	60 V DC
Input voltage range in reference to U_N	0.9 ... 1.1
Switching threshold "0" signal, voltage	≤ 40 V
Switching threshold "1" signal voltage	≥ 52 V

Typical input current at U_N	3 mA
Typical response time	50 μ s (at U_N)
Typical turn-off time	800 μ s (at U_N)
Transmission frequency	100 Hz

Output data

Output nominal voltage range	3 V DC ... 48 V DC
Limiting continuous current	100 mA
Voltage drop at max. limiting continuous current	≤ 1 V
Output circuit	2-conductor floating
Name of protection	Polarity protection
	Surge protection
Protective circuit/component	Polarity protection diode

General data

Length	28 mm
Width	5 mm
Height	15 mm
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Mounting position	Any
Assembly instructions	In rows with zero spacing
Operating mode	100% operating factor
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
Rated surge voltage / insulation	Basic insulation
Pollution degree	2
Surge voltage category	III

Certificates / Approvals




Certification

CUL, GL, GOST, UL


Drawings

Drilling diagram

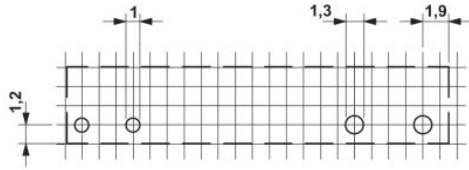


a = pitch division 1.25 mm and 1.27 mm


Diagram

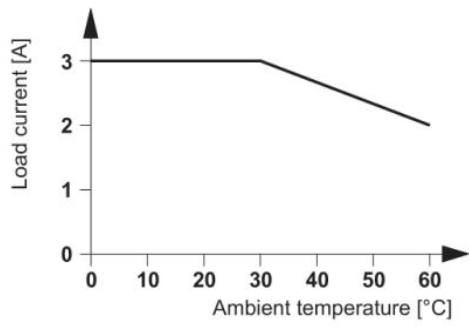

Dimensioned drawing

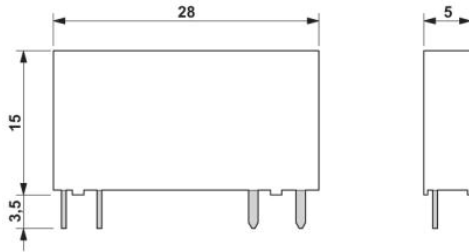

Circuit diagram

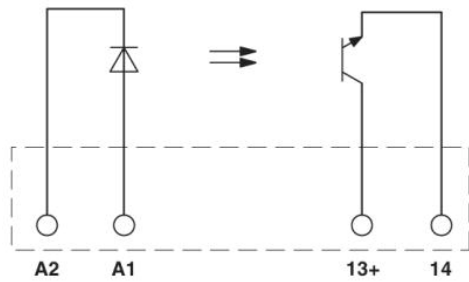

Address

PHOENIX CONTACT UAB
Svitrigailos Str. 11b
03228 Vilnius, LITHUANIA
Phone +370 5 2106321
Fax +370 5 2106324
<http://www.phoenixcontact.lt>



© 2009 Phoenix Contact
Technical modifications reserved;