

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0639101300](#)
Status: **Active**
Description: T2 Terminator Tooling Die for Micro-Fit 3.0™ Crimp Terminal, 26-30 AWG

Documents:
[RoHS Certificate of Compliance \(PDF\)](#)

General


Product Family	Application Tooling
Series	T1801
Comments	See Tooling Specification (PDF) Above
Function	Crimp
Geographic Area	Global
Level of Automation	Semi-Automatic
Product Name	T2
Survey	www.molex.com/review/apptool_survey.html
Tool Type	Terminator

Material Info

Reference - Drawing Numbers

Application Tooling Documents

ATS-639101300, TM-638000029, TM-638000029CN, TM-638000029DE, TM-638000029FR, TM-638000029IT, TM-638000029JP, TM-638000029KR, TM-638000029MY, TM-638000029PL, TM-638000029RU, TM-638000029SK, TM-638000029SP, TM-638000029TH, TM-638000029TW, TM-638000029VN, TM-638500090, TM-638500090SP

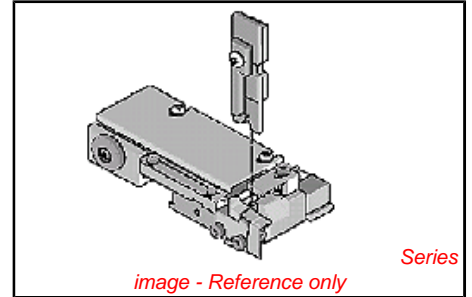

EU RoHS	China RoHS
Compliance Status	
Not Reviewed	
REACH SVHC	
Not Reviewed	
Low-Halogen Status	
Not Reviewed	

Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

T1801Series

Use With

Molex TM-42 press, [69002-5001](#) , [69002-5000](#) , and base unit, [11-19-3001](#) for the 3BF press

Application Tooling Description	FAQ Product #
Micro-Fit 3.0™ Reduced Mating Force, Crimp Terminal, Female, with 0.38µm (15µ") Selective Gold (Au) over Nickel (Ni), 26-30 AWG, without Lubricant	0462350003
Micro-Fit 3.0™ Reduced Mating Force, Crimp Terminal, Female, with .0.76µm (30µ") Selective Gold (Au)	0462350004

over Nickel (Ni), 26-30 AWG, without Lubricant	
Micro-Fit 3.0™	0462355003
High Mating Cycle, Reduced Mating Force, Crimp Terminal, Female, with 0.38µm (15µ") Selective Gold (Au)	
over Nickel (Ni), 26-30 AWG, with Lubricant	
Micro-Fit 3.0™	0462355004
High Mating Cycle, Reduced Mating Force, Crimp Terminal, Female, with .0.76µm (30µ") Selective Gold (Au)	
over Nickel (Ni), 26-30 AWG, with Lubricant	

This document was generated on 05/11/2011

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION