

DF Series Power Rocker Switches



Features/Benefits

- Power switching up to 16 AMPS
- Sub-panel and Front-panel mounting
- PC and quick connect terminals
- Multi-position and multi-pole function
- Available in UL94V-0 grade materials
- RoHS compliant

Typical Applications

- Computers
- Power supplies
- Appliances
- Fitness equipment
- Off-road vehicles



Specifications

CONTACT RATING: 16 AMPS @ 125, 250 V AC; 1/4 HP @ 125 V AC; 1/2 HP @ 250 V AC; 6 AMPS @ 48 V DC (UL/CSA); 16 (2) AMPS @ 250 V AC, T100 (VDE).
DF52 & DF62: 6 AMPS @ 48 V DC (VDE).

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

INSULATION RESISTANCE: $10^9 \Omega$ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -20°C to +85°C

Materials

HOUSING & ACTUATOR: 6/6 nylon (UL 94V-2), black, finish: matte.

CONTACTS: Fine silver, silver plated.


TERMINALS: Copper, silver plated.

CONTACT SPRING: Music wire or stainless steel.

NOTE: Specifications and materials listed above are for standard switches. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages G-79 thru G-81. For additional options not shown in catalog, consult Customer Service Center.

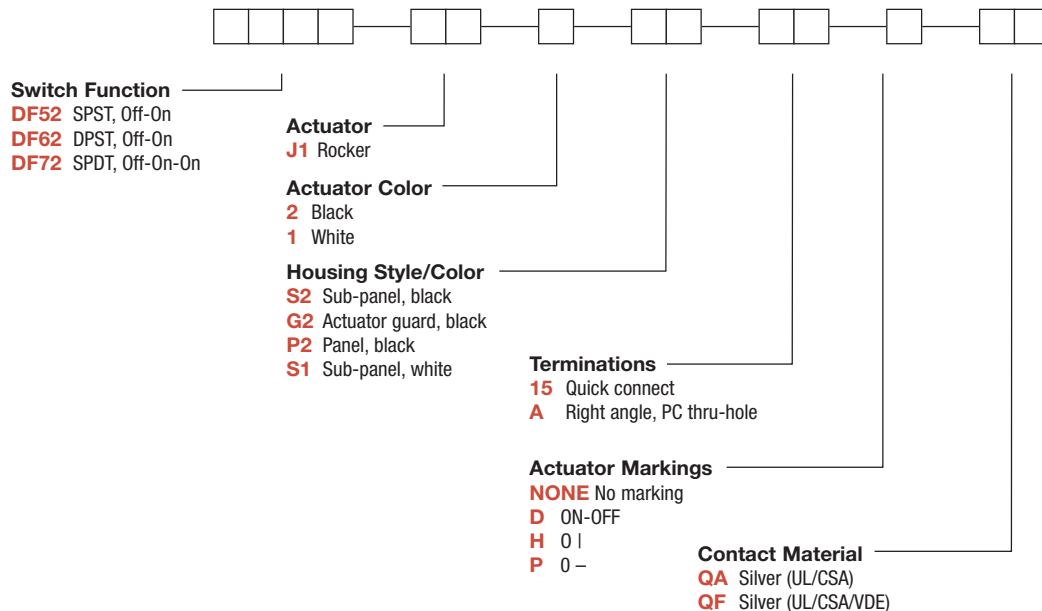

Rocker



G

C&K

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change


DF Series Power Rocker Switches

SWITCH FUNCTION

| NO. POLES | MODEL NO. | SWITCH FUNCTION | | CONNECTED TERMINALS | | SCHEMATIC |
|-----------|-----------|-----------------|--------|---------------------|------------|-----------|
| | | POS. 1 | POS. 2 | POS. 1 | POS. 2 | |
| | | | | | | |
| SP | DF52 | OFF | ON | OPEN | 1-1A | SPST |
| DP | DF62 | OFF | ON | OPEN | 1-1A, 2-2A | DPST |

| NO. POLES | MODEL NO. | POS. 1 | POS. 2 | POS. 3 | POS. 1 | POS. 2 | POS. 3 | SCHEMATIC |
|-----------|-----------|--------|--------|--------|--------|----------|----------------------|-----------|
| | | | | | | | | |
| SP | DF72 | OFF | ON | ON | OPEN | 1 / 2-2A | 1 / 2-1A 1 / 2-2A | |

DPST

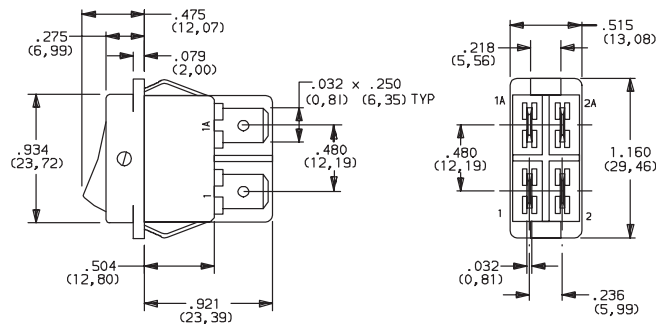


Actuator shown in Pos. 1

Part number shown: DF62J12S215QA

All models with all options. Some models available with , see page G-81.


ACTUATOR

J1 ROCKER



| OPTION CODE | ACTUATOR COLOR |
|-------------|----------------|
| 2 | BLACK |
| 1 | WHITE |

NOTE: Actuator finish: matte. Other colors available, consult Customer Service Center.



Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

www.ck-components.com





DF Series Power Rocker Switches

HOUSING STYLE/COLOR

S SUB-PANEL

G2 ACTUATOR GUARD


NEW!

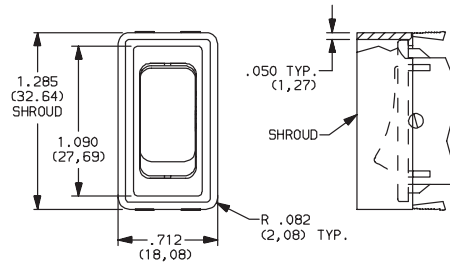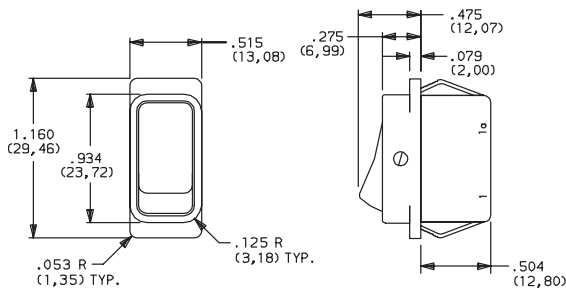

NOTE: Not available with 'A' termination.
Available in black only.

NOTE: DF52 & DF62 models only.

P PANEL

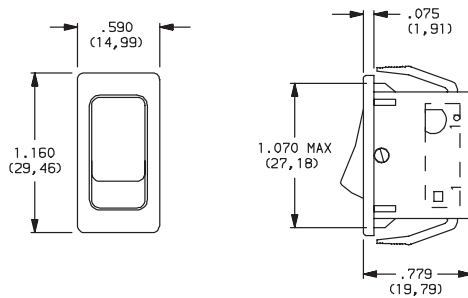


| OPTION CODE | HOUSING COLOR |
|-------------|---------------|
| 2 | (STD.) BLACK |
| 1 | WHITE |

NOTE: Housing finish: matte. Other colors available, consult Customer Service Center.

PANEL MOUNTING

| PANEL THICKNESS | DIM 'A' |
|----------------------------|------------------|
| .029-.048 (0,74) (1,22) | 1.021 (25,93) |
| .048-.078 (1,22) (1,98) | 1.029 (26,14) |
| .078-.117 (1,98) (2,97) | 1.045 (26,54) |
| .075-.140 (1,91) (3,56) | 1.075 (27,31) |

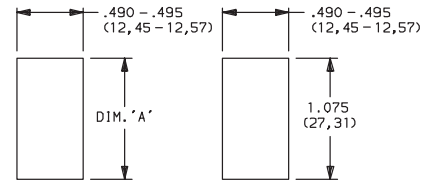


DF52 & DF62 Models with 'S' housing style

DF52, DF62 & DF72 Models with 'P2' & 'G2' housing style

NOTE: Not available with 'A' termination.
Available in black only.


TERMINATIONS

15 QUICK CONNECT

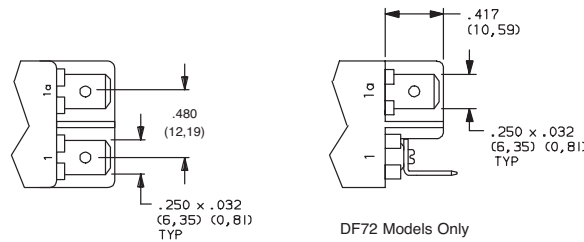

DF72 Models Only


A RIGHT ANGLE, PC THRU-HOLE

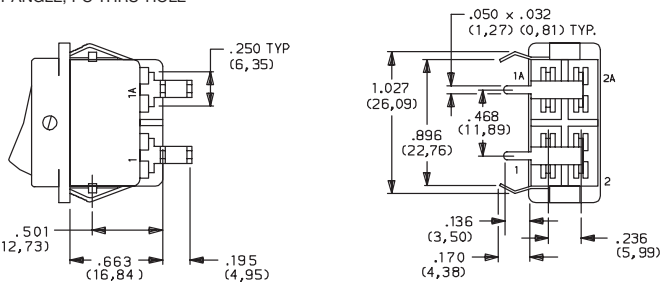


Actuator shown in Pos. 1

NOTE: DF52 and DF62 Models Only

PC MOUNTING



Rocker



Third Angle Projection

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

www.ck-components.com



G

C&K

DF Series Power Rocker Switches


ACTUATOR MARKINGS

NONE NO MARKING

D ON-OFF

H 0 |

P 0 -

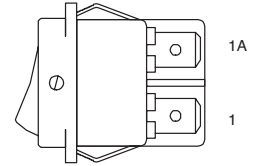

NOTE: Orientation of actuator markings and terminals.

'D, H, & P' marking options: marking color white, standard for all actuator colors except white.
Marking color black, standard for white actuators. Consult Customer Service Center for other available marking colors.

CONTACT MATERIAL

| OPTION CODE | CONTACT AND TERMINAL MATERIAL | RATINGS | |
|-------------|-------------------------------|---------|--|
| QA | SILVER 1,2 | POWER | 16 AMPS @ 125, 250 V AC; 1/4 HP @ 125 V AC; 1/2 HP @ 250 V AC; 6 AMPS @ 48 V DC (UL/CSA). |
| QF | | | 16 AMPS @ 125, 250 V AC; 1/4 HP @ 125 V AC; 1/2 HP @ 250 V AC (UL/CSA). 16(2) AMPS @ 250 V AC, T100 (VDE); DF52 & DF62: 6 AMPS @ 48 V DC (VDE). |

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.


¹ CONTACTS: Fine silver, silver plated.

² TERMINALS: Copper, silver plated.

All models with all options, models with 'QF' contact material also .

AVAILABLE HARDWARE


Actuator Guard

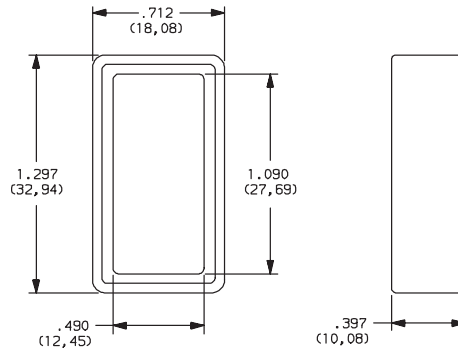

PART NO.

285B02000

Material: Nylon 6/6
Finish: Matte



Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

www.ck-components.com

