


CW-B9451

| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|-------------|-------|
| 3 | 201649 | JLH 13NOV00 | SAV |
| 4 | 202874 | JLH 17APR01 | SAV |
| 5 | 0012441 | KSR 13APR05 | AK |
| 6 | 0012914 | KR 03MAY05 | AK |

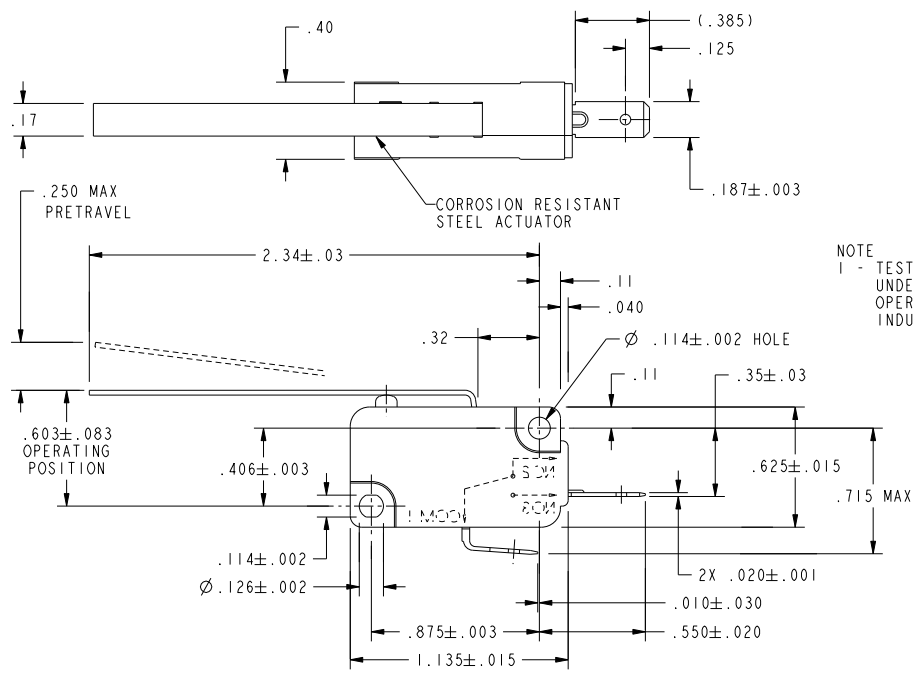

NOTE
 1 - TESTED TO SHOW COMPLIANCE WITH UL 858 OVEN LATCH REQUIREMENTS UNDER THE FOLLOWING PARAMETERS: ELECTRICAL ENDURANCE FOR 100K OPERATIONS AT 200°C FOR 250 HOURS MINIMUM WHILE CONTROLLING AN INDUCTIVE LOAD OF 6A, 277VAC

| CHARACTERISTICS | | ELECTRICAL DATA | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: | | DRAWN | | CHECK | | TITLE | |
|--------------------------|--------------|---------------------------------------|---------|--|-----------------|--|---------|---|----------|---------------|-------|
| OPERATING FORCE----- | 35 GRAMS MAX | CONTACT ARRANGEMENT | S P N O | NO PLACE | X ±.040 ±1 | JLH | 13NOV00 | SAV | 13NOV00 | Honeywell | |
| RELEASE FORCE----- | 2 GRAMS MIN | L278 6A, 1/8HP 125, 250 OR 277 VAC | | ONE PLACE | .X ±.030 ±0,4 | THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. | | DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED | | SWITCH, BASIC | |
| DIFFERENTIAL TRAVEL----- | .054 MAX | | | TWO PLACE | .XX ±.015 ±0,15 | PTC 2D ASME Y14.5M-1994 | | SIZE | DWG TYPE | DRAWING NAME | REV |
| OVERTRAVEL----- | .124 MIN | | | THREE PLACE | .XXX ±.005 ± | THIRD ANGLE PROJECTION | | B | I | V7-1X2AD8-048 | 6 |
| RELEASE TRAVEL----- | .030 MIN | | | ANGLES | ± ± | | | SCALE | NONE | WEIGHT | SHEET |
| | | | | RAW MATERIAL-COMMERCIAL STANDARD | ± ± | | | | | | |