


UV LAMP
SPECTRAL OUTPUT

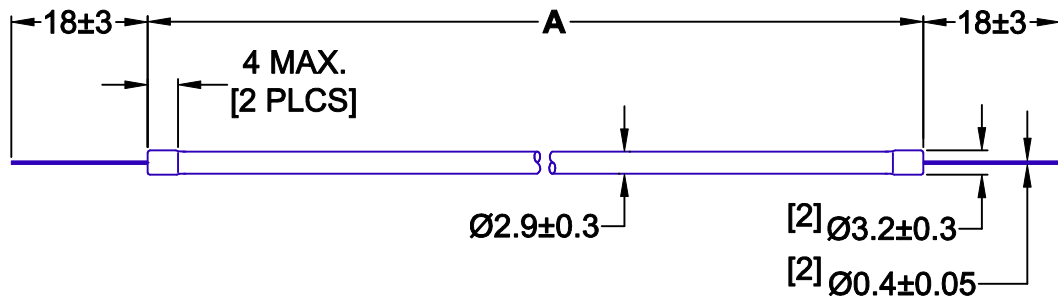

JKL PART NUMBER	LENGTH (A) +/- 2mm	LAMP WATTS	STARTING VOLTAGE VS (Vrms)	OPERATING VOLTAGE VL (Vrms)	OPERATING CURRENT IL (mA rms)	OUTPUT Uw/CM2 @1"	*RATED LIFE (HRS)
BF325-UV1	25mm	0.35	350	140	2.5	.20	8,000
		0.70	350	140	5.0	.30	5,000
BF350-UV1	50mm	0.49	500	195	2.5	.20	10,000
		0.98	500	195	5.0	.30	6,000
BF366-UV1	66mm	0.54	550	215	2.5	.20	10,000
		1.10	550	215	5.0	.30	6,000
BF3100-UV1	100mm	1.30	650	260	5.0	.25	10,000
BF3120-UV1	120mm	1.40	700	280	5.0	.25	10,000
BF3130-UV1	130mm	1.50	720	300	5.0	.25	10,000
BF3150-UV1	150mm	1.68	750	335	5.0	.25	10,000
BF3221-UV1	221mm	2.25	1075	450	5.0	.25	10,000
BF3237-UV1	237mm	2.50	1150	500	5.0	.25	10,000
BF3240-UV1	240mm	2.50	1150	500	5.0	.25	10,000

*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE OUTPUT BECOMES 50% OF THE INITIAL RATING.

ALL SPECIFICATIONS ARE TYPICAL WITH THE LAMP OPERATING AFTER STABILIZATION, AT AN AMBIENT TEMPERATURE OF 25°C.

METRIC THIRD ANGLE PROJECTION			DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0.20 ANGLE +/- 0		JKL COMPONENTS CORPORATION				
E ADD PART NUMBER BF3221-UV1 6/18/03 D ADD PART NUMBER BF3237-UV1 4/7/00 C ADD PART NUMBER BF366-UV1 8/20/99 B CORRECT OUTPUT POWER 3/1/99 A ADD BF3130-UV1 11/11/98 RELEASED - CANCEL ALL BF-3mm Ø UV1 DRAW'S 6/3/98			DRAWN BY L. WENGSTROM APP'VD BY DATE F.D. 6/18/03		TITLE MINIATURE 3.2mm 365nm UV-CCFL				
REV. NO. DESCRIPTION/ECO NUMBER APP'VD DATE			- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SIZE A	FSCM NO. 55335	DRAWING NO.	BF 3-UV1	
					SCALE NONE	RELEASED DATE 6/3/98	REVISION DATE 6/18/03	REV. NO. E	SHEET 1 OF 1