

# Green PLCC4 Surface Mount LED

## OVSAGBC2R8

- High intensity with low power consumption
- White PLCC4 packaged in 8mm tape on 1mm diameter reel
- Compatible with automatic placement equipment
- Dimensions . x 2. 8x 1.7 mm
- 120° viewing angle



The **OVSAGBC2R8** is designed for wide angle, uniform light output. Its internal reflector and colorless clear lens optimize luminous intensity and make it ideal for backlighting applications and for coupling with light guides.


### Applications

- Traffic lights
- Signal and symbol luminaire
- Mono-color indicators
- Backlighting (LCD, switches, displays, illuminated advertising)
- Interior automotive lighting (instrumentation clusters)
- Safety marker lights (steps, exit ways)

Part Number	Material	Emitted Color	Intensity Typ. mcd	Lens Color
OVSAGBC2R 8	InGaN	Green	00	Water Clear



RoHS



**DO NOT LOOK DIRECTLY AT LED WITH UNSHIELDED EYES OR DAMAGE TO RETINA MAY OCCUR.**

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

### Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$  unless otherwise noted

Storage Temperature Range	40 ~ +100°C
Operating Temperature Range	40 ~ +100°C
Junction Temperature	110°C
Junction/Ambient <sup>1</sup>	0°C/W
Junction/Solder Point	200°C/W
Reverse Voltage	V
Continuous Forward Current	0 mA
Peak Forward Current (10% Duty Cycle, PW ≤ 100 μsec)	100 mA
Power Dissipation	140 mW

Note

1. Rth test condition Mounted on PC board FR4 (pad size ≥ 1 mm<sup>2</sup>)


### Electrical Characteristics

$T_A = 25^\circ\text{C}$  unless otherwise noted

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
$I_V$	Luminous Intensity	40	100	---	mcd	$I_F = 0\text{ mA}$
$V_F$	Forward Voltage	---	2.5	4.0	V	$I_F = 0\text{ mA}$
$I_R$	Reverse Current	---	---	10	μA	$V_R = -5\text{ V}$
$\lambda_D$	Dominant Wavelength	516	526	536	nm	$I_F = 0\text{ mA}$
$2\theta$	0% Power Angle	---	120	---	deg	$I_F = 0\text{ mA}$

### Standard Bins ( $I_F = 0\text{ mA}$ )

Lamps are sorted to luminous intensity ( $I_V$ ) and dominant wavelength ( $\lambda_D$ ) bins shown. Orders for OVSAGBC2R 3 may be filled with any or all bins contained as below.






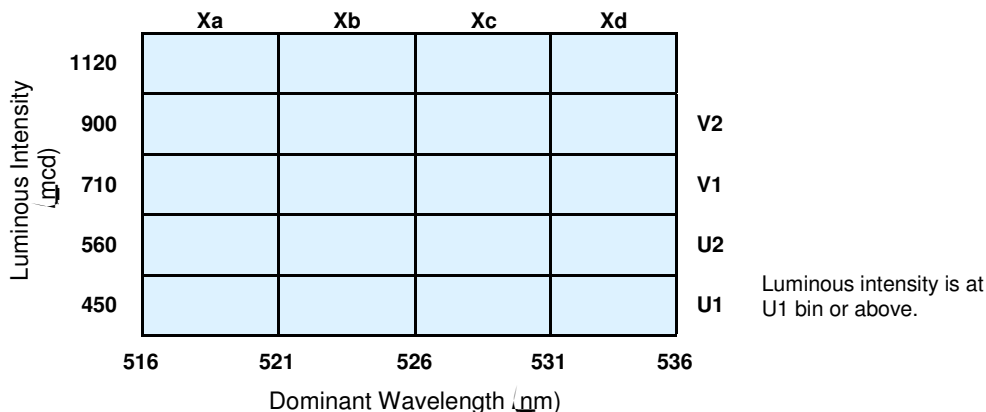


### Important Notes:

- All ranks will be included per delivery, rank ratio will be based on the chip distribution.
- To designate luminous intensity ranks, please contact OPTeK.

OPTeK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Typical Electro-Optical Characteristics Curves

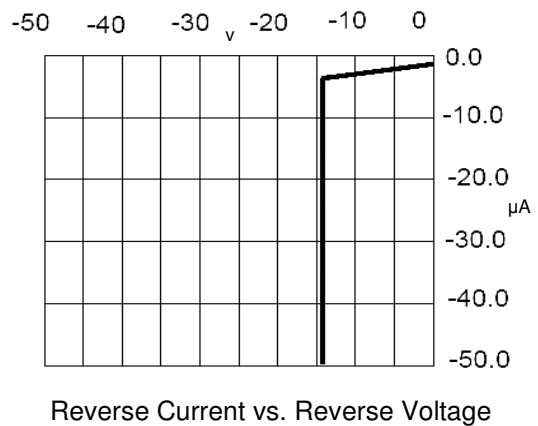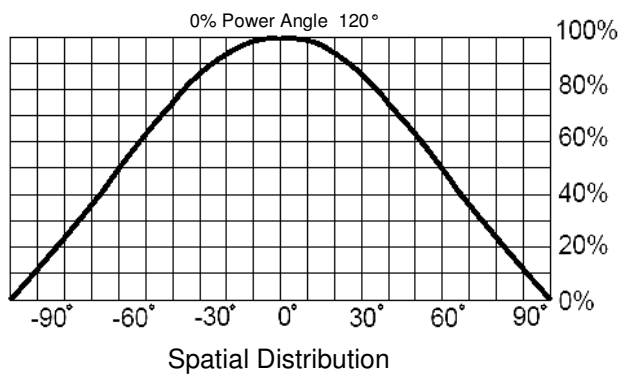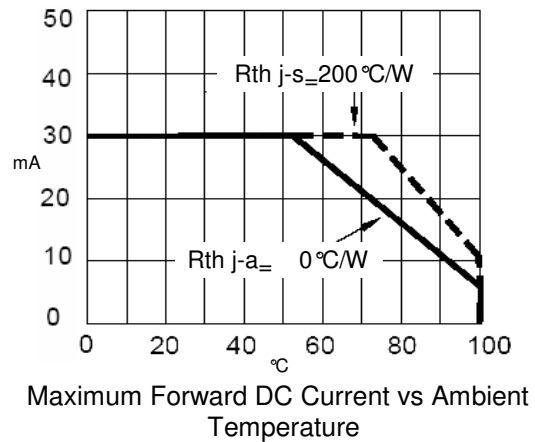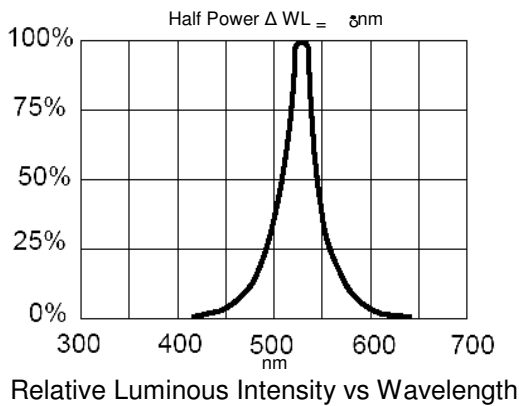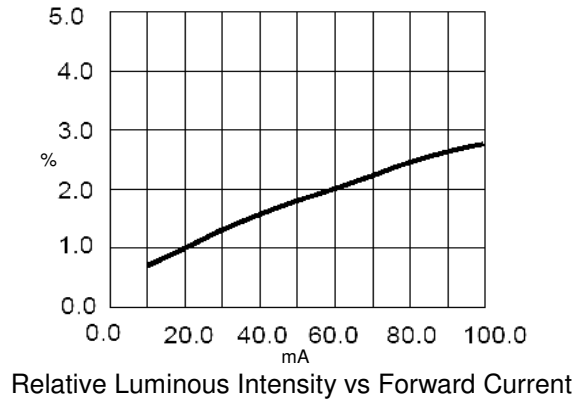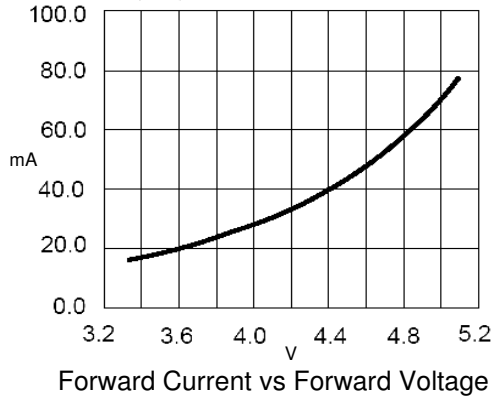


OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


# Green PLCQ4 Surface Mount LED

## OVSAGBC2R 3


### Reel Dimensions 1/2-inch reel

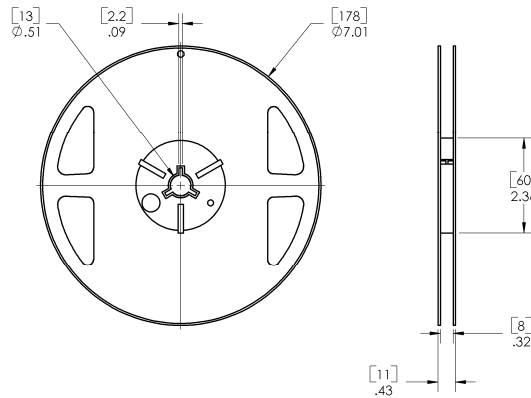

### Carrier Tape Dimensions Loaded quantity 2000 pieces per reel

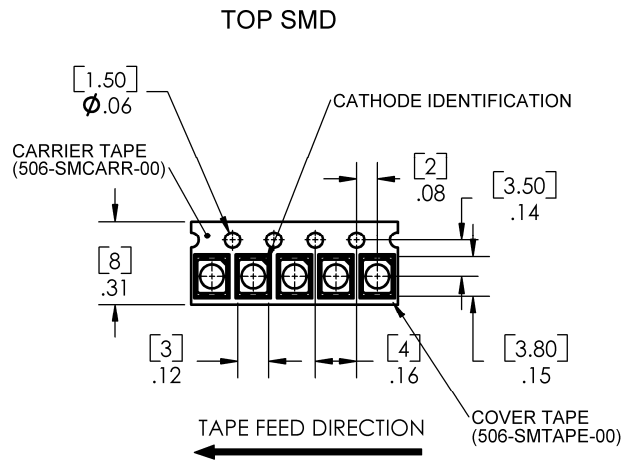

### Moisture Resistant Packaging

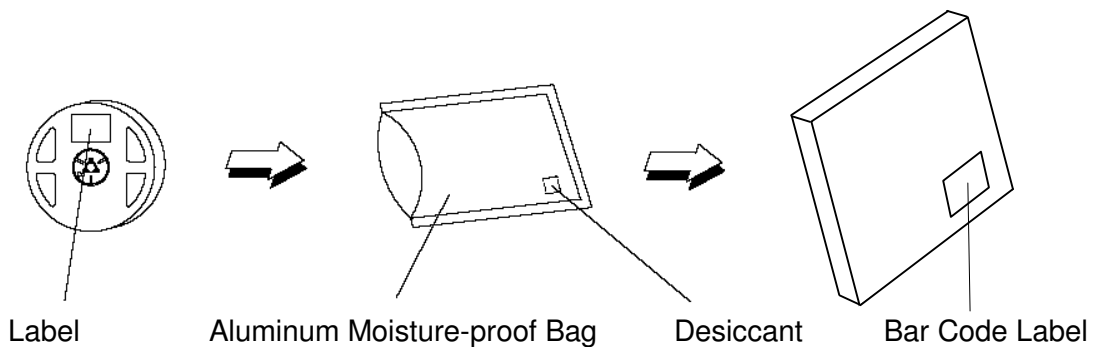

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.