
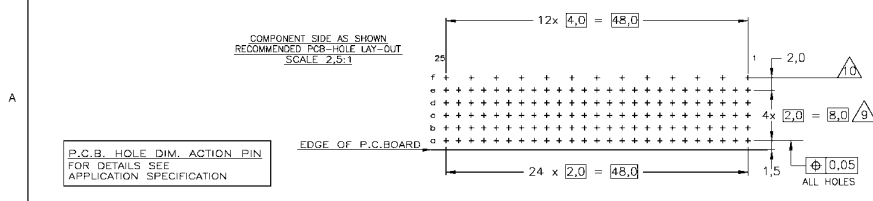
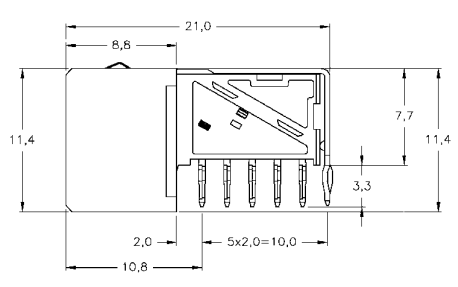


- NOTES:
- ⚠ MATERIAL CONTACTS: PHOSPHORBRONZE
 - ⚠ MATERIAL: HOUSING: GLASSFILLED POLYESTER (GRAY)
 - ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT); 1.27µm NICKEL MIN. AND ACTION PIN: 0.5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS. CONNECTOR LUBRICATED WITH TELCORDIA APPROVED LUBRICANT.
 - ⚠ PLATING SHIELD: CONTACT AREA : 0.76µm Au MIN. ACTION PIN : 0.5µm Sn MIN. REMAINDER : Ni
 - ⚠ ASSEMBLY PRINTED WITH P/N AND DATECODE. THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B
 - ⚠ 125 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - ⚠ ROW "1" 13 PLATED THROUGH HOLES FOR UPERSHIELD
 - ⚠ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE
 - 12 BASIC P.N. LOWERSHIELD: 5338110

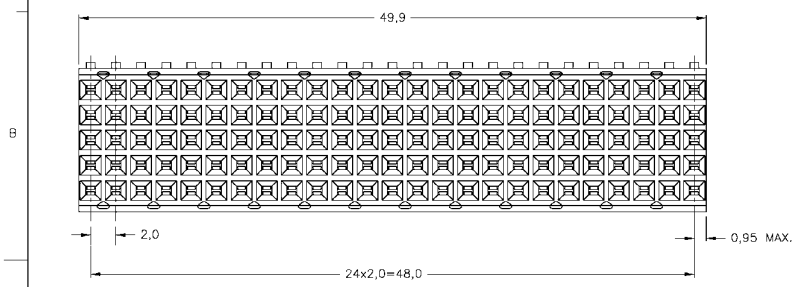

FINISH	MATERIAL	PARTNUMBER
⚠	⚠	5352069-9
⚠	⚠	5352069-4
⚠	⚠	5352069-1

THIS DRAWING IS A CONTROLLED DOCUMENT.	DATE: 17AUG2004	TYPE: Type Electronics Corporation
DESIGNER: KIRAN	FOR: 24SEP2004	"a-Hertogenbosch,5222AF-32V
DRW: B. MODU	DATE: 24SEP2004	
PRODUCT SPEC: 108-19082	APPLICATION SPEC: 114-19029	
MATERIAL: -	FINISH: -	
CUSTOMER DRAWING		SCALE: 5:1 SHEET: 1 of 1 REV: B

P.C.B. HOLE DIM. ACTION PIN FOR DETAILS SEE APPLICATION SPECIFICATION

COMPONENT SIDE AS SHOWN. RECOMMENDED PCB-HOLE LAY-OUT SCALE 2.5:1

EDGE OF P.C.B. BOARD