
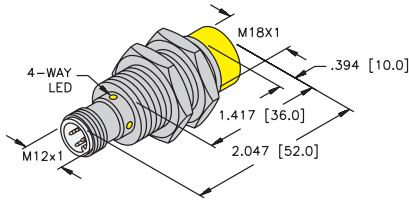
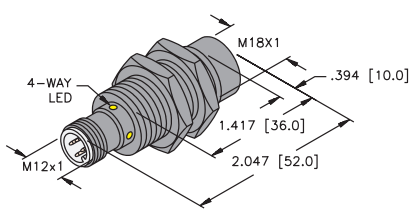









Inductive Sensors




Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
18 mm - Nonembeddable, eurofast® Connection 	Ni 8-M18-AD4X-H1141	T4414700		8	2-Wire DC
	Ni 8-M18-AD4X-H1144	T4411288		8	
	Ni 14-M18-AD4X-H1141	T4417241	Ext. Range	14	
	Ni 14-M18-AD4X-H1144	T4417290	Ext. Range	14	
	Ni 8-M18-AN6X-H1141	T4614800		8	3-Wire DC NPN
	Ni 10-EM18WD-AN6X-H1141	M4653433	Washdown	10	
	Ni 10-M18-AN6X-H1141	T4614892		10	
	Ni 10-M18WD-AN6X-H1141	M4653440	Washdown	10	
	Ni 12U-EM18-AN6X-H1141	M1645350	Uprox	12	
	Ni 12U-EM18-AN6X2-H1141	M1645355	Uprox	12	
	Ni 15U-EM18WD-AN6X-H1141	M1634835	Uprox Washdown	15	
	Ni 12U-M18-AN6X-H1141	M1645150	Uprox	12	
	Ni 12U-M18-AN6X2-H1141	M1645155	Uprox	12	
	Ni 14-M18-AN6X-H1141	T4611410	Ext. Range	14	
	Ni 8-M18-AP6X-H1141	T4614700		8	3-Wire DC PNP
	Ni 10-EM18WD-AP6X-H1141	M4653419	Washdown	10	
	Ni 10-M18-AP6X-H1141	T4641291		10	
	Ni 12U-EM18-AP6X-H1141	M1645340	Uprox	12	
	Ni 12U-EM18-AP6X2-H1141	M1645345	Uprox	12	
	Ni 12U-M18-AP6X-H1141	M1645140	Uprox	12	
Ni 12U-M18-AP6X2-H1141	M1645145	Uprox	12		
Ni 14-M18-AP6X-H1141	T4611400	Ext. Range	14		
Ni 8-M18-VN4X-H1141	T1571900	Comp. Outputs	8	4-Wire DC NPN	
Ni 14-M18-VN4X-H1141	T4590603	Ext. Range	14		
Ni 8-M18-VP4X-H1141	T1561900	Comp. Outputs	8	4-Wire DC PNP	
Ni 14-M18-VP4X-H1141	T4590602	Ext. Range	14		
Ni 10-M18-Y1X-H1141	M4015300		10	2-Wire NAMUR	
Ni 12U-M18-ASIX-H1140	M1901005	Uprox	12	2-Wire ASI-BUS	
18 mm - Nonembeddable, eurofast connection, Teflon Coated 	Ni 12U-MT18-AN6X-H1141	M1645250	Uprox	12	3-Wire DC NPN
	Ni 12U-MT18-AP6X-H1141	M1645240	Uprox	12	3-Wire DC PNP
	Ni 12U-MT18-AP6X2-H1141	M1645245	Uprox	12	
	Ni 12U-MT18H-AP6X-H1141/S1589	M1645292	weldguard® Uprox	12	
	Ni 12U-MT18H-AP6X2-H1141/S1589	M1645293	weldguard Uprox	12	

Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	Power LED	Output LED	Mating Cordset	Wiring Diagram #	Wiring Diagrams
10-65 VDC	500	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*	1	Diagram 1 
	500	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*/S674	2	
	500	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*	1	
	500	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*/S674	2	
10-30 VDC	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	Diagram 2 
	500	≤200	-25 to +85	IP 68, IP 69K	SS	PVDF	N/A	YE	RK 4T-*	3	
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	
	2000	≤200	-30 to +85	IP 68	SS	PA 12	N/A	YE	RKV 4T-*	3	
	2000	≤200	-30 to +85	IP 68	SS	PA 12	GN	YE	RKV 4T-*	3	
	1000	≤200	-30 to +85	IP 68, IP 69K	SS	PVDF	N/A	YE	RK 4T-*	3	
	2000	≤200	-30 to +85	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	
	2000	≤200	-30 to +85	IP 67	CPB	PA 12	GN	YE	RK 4T-*	3	
	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	
10-30 VDC	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	Diagram 3 
	500	≤200	-25 to +85	IP 68, 69K	SS	PVDF	N/A	YE	RK 4T-*	4	
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	
	2000	≤200	-30 to +85	IP 68	SS	PA 12	N/A	YE	RKV 4T-*	4	
	2000	≤200	-30 to +85	IP 68	SS	PA 12	GN	YE	RKV 4T-*	4	
	2000	≤200	-30 to +85	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	
	2000	≤200	-30 to +85	IP 67	CPB	PA 12	GN	YE	RK 4T-*	4	
	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	
10-65 VDC	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	5	Diagram 4 
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	5	
10-65 VDC	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	6	Diagram 5 
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	6	
5-30 VDC	500	Remote	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.21T-*	7	Diagram 6 
	200	N/A	-30 to +85	IP 68	CPB	PA 12	N/A	YE	RKC 254-*M	8	
10-30 VDC	2000	≤200	-30 to +85	IP 67	TC	TC	N/A	YE	RK 4T-*	3	Diagram 7 
	2000	≤200	-30 to +85	IP 67	TC	TC	GN	YE	RK 4T-*	4	
10-30 VDC	2000	≤200	-30 to +85	IP 67	TC	TC	N/A	YE	RK 4T-*	4	Diagram 8 
	2000	≤200	-30 to +85	IP 67	TC	TC	GN	YE	RK 4T-*	4	
	2000	≤200	-30 to +85	IP 67	TC	WG	N/A	YE	RKG 4T-*/S600	4	
	2000	≤200	-30 to +85	IP 67	TC	WG	GN	YE	RKG 4T-*/S600	4	

* Length in meters.



WIRING DIAGRAM



OUTPUT: AD4X

SHORT-CIRCUIT AND OVERLOAD PROTECTED

LOCKNUT LN-M18

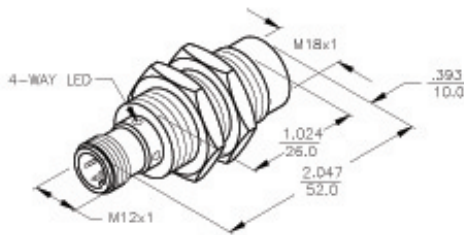

SPECIFICATIONS

OPERATING VOLTAGE	10-85 VDC
RIPPLE	≤ 10%
DIFFERENTIAL TRAVEL (HYSTERESIS)	1-15% (5% TYPICAL)
VOLTAGE DROP ACROSS CONDUCTING SENSOR	≤ 5 V at 100 mA
OUTPUT FUNCTION	NORMALLY OPEN 2-WIRE DC SELF-CONTAINED
TTL COMPATIBLE	NO
SHORT-CIRCUIT PROTECTED	YES
TRIGGER CURRENT FOR OVERLOAD PROTECTION	≥ 120 mA
CONTINUOUS LOAD CURRENT	≤ 100 mA
OFF-STATE (LEAKAGE) CURRENT	≤ 0.6 mA
TIME DELAY BEFORE AVAILABILITY	≤ 3 ms
POWER-ON EFFECT	PER IEC 947-5-2
REVERSE POLARITY PROTECTION	INCORPORATED
PROTECTION AGAINST TRANSIENTS	Per EN 60947-5-2
OPERATING TEMPERATURE (10% DRIFT)	-25°C to +70°C (-13°F to +158°F)
ENCLOSURE	MEETS NEMA 1, 3, 4, 6, 13 AND IEC IP67
SHOCK	30 g, 11 ms
VIBRATION	55 Hz, 1 mm AMPLITUDE (IN ALL 3 PLANES)
LED FUNCTION	YELLOW: OUTPUT ENERGIZED
RATED OPERATING DISTANCE(Sn)	14mm = .551" (NOMINAL)
SWITCHING FREQUENCY	500 Hz
REPEATABILITY	< 2% OF RATED OPERATING DISTANCE
EMBEDDABLE (SHIELDED)	NO
MATING PLUGS/CABLES	4-PIN "EUROFAST" CONSTRUCTION

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls	
	MATERIAL BRASS BARREL	TOLERANCES UNLESS OTHERWISE SPECIFIED 0.0384in [1.00mm]	DFT US3R	CBM NONE	DATE 09/26/99
FINISH COPPER, NICKEL, CHROME PLATING		UNIT OF MEASUREMENT INCH [MILLIMETER]		IDENTIFICATION NO. T4417241	REV C
C UPDATE OPERATING VOLTAGE REV DESCRIPTION	JBJ 03-13-00 T3434 BY DATE EDO NO.	DO NOT SCALE THIS DRAWING		FILE: T4417241	SHEET 1 OF 1